

	Bidder Complies	
	Yes	No
<p><u>SPECIFICATIONS FOR A 100' HEAVY DUTY MID MOUNT AERIAL TOWER</u></p> <p>Sealed bids will be received by Orangeburg Public Safety for the furnishing of all necessary labor, equipment and material for the Fire Apparatus and other equipment as outlined in the following specifications.</p> <p><u>INTENT OF SPECIFICATIONS</u></p> <p>It shall be the intent of these specifications to cover the furnishing and delivery of a complete fire apparatus. These detailed specifications cover the requirements as to the type of construction, finish, equipment, and tests to which the fire apparatus shall conform. Minor details of construction and materials, which are not otherwise specified, are left to the discretion of the contractor.</p> <p>Images and illustrative material in this specification are as accurate as known at the time of publication but are subject to change without notice. Images and illustrative material are for reference only and may include optional equipment and accessories and may not include all standard equipment.</p> <p><u>INSTRUCTIONS TO BIDDERS</u></p> <p>The purchaser's standards for bidding automotive fire apparatus must be strictly adhered to, and all bid forms and questions must be complete and submitted with the bid. Omissions and variations shall result in immediate rejection of the bid.</p> <p>Bids shall only be considered from companies that have an established reputation in the field of fire apparatus construction and have been in business for a minimum of 20 years. Furthermore, in order to insure fair, ethical, and legal competition, neither the original equipment manufacturer (O.E.M.) nor parent company of the O.E.M. shall have ever been fined or convicted of price fixing, bid rigging, or collusion in any domestic or international fire apparatus market (no exception).</p> <p>If a bidder represents more than one fire apparatus company or brands of apparatus, they must only bid one brand and the top of the line apparatus that meets specification.</p> <p>Each bidder shall furnish satisfactory evidence of their ability to construct the apparatus specified.</p> <p>Any apparatus manufacturer or their parent company who has had a performance bond called in the last 10 years, shall not be eligible to bid. Any bids from these manufactures shall be immediately rejected (no exception).</p> <p>Each bid shall be accompanied by a set of manufacturer's set of specifications consisting of a detailed description of the apparatus, construction methods, and equipment proposed to which the apparatus furnished under contract shall conform. These specifications shall indicate size, type, model and make of all component's parts and equipment, providing proof of compliance</p>		

	Bidder Complies	
	Yes	No
<p>with each and every item in the departments advertised specifications. A letter only, even though written on company letterhead, shall not be sufficient. An exception to this requirement shall not be acceptable.</p> <p>In accordance with the current edition of NFPA 1901 standards, the proposal shall specify whether the fire department or apparatus dealership shall provide required loose equipment.</p> <p>The purchaser will utilize this advertised specification to compare all submitted bid proposals. To facilitate comparison, all bid proposal specifications shall be submitted in the same sequence as the advertised specification. Any bidder who fails to submit a set of bid proposal specifications, or who photocopies and submits these specifications as their own construction details will be considered nonresponsive. This shall render such proposal ineligible for award.</p> <p>The purchaser's specification shall, in all cases, govern the construction of the apparatus, unless a properly documented exception or deviation was approved. Any bid indicating that the manufacturer's proposal shall supersede the purchaser's specification will be considered a complete substitute and immediately rejected.</p> <p>In the event the bidder represents more than one manufacturer meeting the manufacturer requirements outline herein, then the bidder shall "only" bid the highest quality vehicle that the bidder represents. Under no circumstances shall multiple bids from the same bidder for different manufacturers be accepted. Should a bidder submit two or more bids representing more than one manufacturer, then all bids submitted by that bidder shall be rejected as being non-complaint with the requirements of this specification.</p> <p>THE PURCHASER HAS THE RIGHT TO REJECT ANY BIDS WHICH DOES NOT MEET THESE SPECIFICATIONS AND IS THE SOLE DECIDER TO DEEM WHICH BID IS IN THE BEST INTEREST OF THE PURCHASER.</p> <p><u>EXCEPTIONS</u></p> <p>These specifications are based upon design and performance criteria which have been developed by the fire department because of extensive research and careful analysis. Subsequently these specifications reflect the only type of fire apparatus that is acceptable at this time and all specifications herein contained are considered as minimum. Therefore, exceptions to the specifications may not be accepted.</p> <p>Bidders shall indicate in the "yes/no" column if their bid complies on each item (paragraph) specified.</p> <p>If a product brand name is specified and is commercially available to all bidders, an exception to such items is not acceptable and such bid may be rejected.</p> <p>Exceptions shall be allowed if they are equal to or superior to that specified and provided, they are listed and fully explained on a separate page. All deviations, no matter how slight, shall be clearly explained on a separate sheet, in the bid sequence, citing the page and paragraph number(s) of the specifications, how the proposal deviation is different, how the deviation meets</p>		

	Bidder Complies	
	Yes	No
<p>or exceeds the specifications and why it is necessary, and entitled "EXCEPTIONS TO SPECIFICATIONS". The buyer reserves the right to require a bidder to provide proof in each case that a substituted item is equal to that specified. The buyer shall be the sole judge in determination of acceptable substitutes.</p> <p>Proposals that are found to have deviations without listing them or bids taking total exceptions to these advertised specifications will be rejected (no exception).</p> <p>Bids not including all exceptions is a material breach and shall result in the bid being immediately rejected (no exception).</p> <p><u>GENERAL DESIGN AND CONSTRUCTION</u></p> <p>The cab, chassis, pump module, and body are to be entirely designed, assembled, and painted by the prime vehicle manufacturer, which minimizes third party involvement on engineering, design, service, and warranty issues.</p> <p>All bidders shall provide a list of the company, manufacturing location, and engineering source for each individual major component, including but not limited to the welded cab assembly, the pumphouse module assembly, the chassis assembly, body, and electrical system. Apparatus using any subcontracted cab, chassis, pump module, electrical system or body will not be acceptable.</p> <p>The apparatus shall be designed with due consideration to distribution of load between the front and rear axles. Weight balance and distribution shall be in accordance with the recommendations of the National Fire Protection Association.</p> <p>The bidder shall make accurate statements as to the apparatus weight and dimensions.</p> <p><u>QUALITY AND WORKMANSHIP</u></p> <p>All steel welding shall follow American welding Society D1.1-2004 recommendations for structural steel welding. All aluminum welding shall follow American welding Society and ANSI D1.2-2003 requirements for structural welding of aluminum. All sheet metal welding shall follow American Welding Society B2.1-2000 requirements for structural welding of sheet metal. Flux core arc welding to use alloy rods, type 7000, American welding Society standards A5.20-E70T1. Employees classified as welders are tested and certified to meet the American Welding Society codes upon hire and every three (3) years thereafter. The manufacturer shall be required to have an American welding Society certified welding inspector in plant during working hours to monitor weld quality.</p> <p>The manufacturer shall also be certified to operate a Quality Management System under the requirements of ISO 9001. These standards sponsored by the International organization for Standardization (ISO) specify the quality systems that shall be established by the manufacturer for design, manufacture, installation, and service. A copy of the certificate of compliance shall be included with the bid.</p>		

	Bidder Complies	
	Yes	No
<p>To demonstrate the quality of the product and service, each bidder shall provide a list of at least five (5) fire departments/municipalities in the region that have bought a second time from the representing dealer. An exception to this requirement shall not be acceptable.</p> <p><u>MANUALS AND SERVICE INFORMATION</u></p> <p>The manufacturer shall supply at time of delivery, complete operation and maintenance manuals covering the complete apparatus as delivered. A permanent plate shall be mounted in the driver's compartment which specifies the quantity and type of fluid required including engine oil, engine coolant, transmission, pump transmission lubrication, pump primer and drive axle.</p> <p><u>SAFETY VIDEO</u></p> <p>Since video is much more effective than written documentation and can be replayed for new personnel and as a refresher for existing personnel, an apparatus safety video, in DVD format shall be provided at time of delivery. This video shall address key safety considerations for personnel to follow when they are driving, operating, and maintaining the apparatus. Safety procedures for the following shall be included on the video: vehicle pre trip inspection, chassis operation, pump operation and maintenance.</p> <p><u>PERFORMANCE TESTS AND REQUIREMENTS</u></p> <p>A road test shall be conducted with the apparatus fully loaded and a continuous run of ten (10) miles or more shall be made under all driving conditions, during which time the apparatus shall show no loss of power or overheating. The transmission drive shaft or shafts, and rear axle shall run quietly and be free from abnormal vibration or noise throughout the operating range of the apparatus. Vehicle shall adhere to the following parameters:</p> <p>A) The apparatus, when fully equipped and loaded, shall have not less than 25 percent nor more than 50 percent of the weight on the front axle, and not less than 50 percent nor more than 75 percent on the rear axle.</p> <p>B) The apparatus shall be capable of accelerating to 35 mph from a standing start within 25 seconds on a level concrete highway without exceeding the maximum governed rpm of the engine.</p> <p>C) The service brakes shall be capable of stopping a fully loaded vehicle in 35 feet at 20 mph on a level concrete highway. The air brake system shall conform to Federal Motor vehicle Safety Standards (FMVSS) 121.</p> <p>D) The apparatus, fully loaded, shall be capable of obtaining a speed of 50 mph on a level concrete highway with the engine not exceeding the governed rpm (full load).</p> <p><u>FAILURE TO MEET TEST</u></p> <p>In the event the apparatus fails to meet the test requirements of these specifications on the first trial, second trials may be made at the option of the bidder within 30 days of the date of the first trial. Such trials shall be final and conclusive and failure to comply with these requirements shall be cause for rejection. failure to comply with changes to conform to any clause of the</p>		

	Bidder Complies	
	Yes	No
<p>specifications, within 30 days after notice is given to the bidder of such changes, shall also be cause for rejection of the apparatus. Permission to keep or store the apparatus in any building owned or occupied by the purchaser or its use by the purchaser during the above-specified period with the permission of the bidder shall not constitute acceptance.</p> <p><u>SERVICE AND WARRANTY SUPPORT (DEALERSHIP)</u> TO ENSURE FULL SERVICE AFTER DELIVERY, THE SELLING BIDDER/DEALERSHIP MUST BE CAPABLE OF PROVIDING SERVICE WHEN REQUIRED.</p> <p>The bidder/dealership shall show that the company is in position to render prompt service and to furnish replacement parts.</p> <p>Each bidder/dealership must be able to display that they are actively in the fire apparatus service business by operating a factory authorized service center and parts repository capable of satisfying the warranty service requirements and parts requirements of the vehicle(s) being purchased.</p> <p>The bidder/dealership must state the location of this authorized service center. This service center must have a staff of factory-trained mechanics, well versed in all aspects of service for all major components of the apparatus. The service center must be within fifty (50) miles of the Fire Department.</p> <p><u>SERVICE AND WARRANTY SUPPORT (MANUFACTURER)</u> To provide an additional layer of service support, the successful manufacturer must also own a least two separate service facilities, one located in the northern portion of the US to service both Canada and the northern US states and one in the south to service the southern states.</p> <p>The manufacturer shall stock 1 million parts equating to \$5,000,000 of inventory dedicated to service and replacement parts to ensure quick response and minimize down time. Furthermore, the manufacturer shall house the inventory in a dedicated facility, with a dedicated shipping area that ensures service parts are given priority. The bidder shall provide detailed documentation of service and replacement part resources.</p> <p>Parts identification shall be provided to both the dealer and the Fire Department through an online web-based application for the specific truck reflected in this specification. Access will be granted using the specific VIN number of the vehicle. The online web application will provide the ability to view complete bills of materials, digital photographs, parts drawings, assembly drawings, and access to all current operation, maintenance, and service publications.</p> <p>The manufacturer must also maintain a 24 hour/ 7 day a week, toll free emergency hot line.</p> <p>The manufacturer shall employ a staff of adequate size (a minimum of 30 personnel) specifically dedicated to providing customer support and parts for the fielded fleet of vehicles it has produced.</p>		

	Bidder Complies	
	Yes	No
<p>The manufacturer must be capable of providing both in-house and on-site service for the apparatus.</p> <p>The manufacturer shall offer regional factory hands-on repair and maintenance training classes.</p> <p>The manufacturer shall employ a minimum of four certified EVT technicians on staff, not only providing technical expertise in the repair of fire apparatus, but also demonstrating the commitment to service after the sale.</p> <p><u>LIABILITY</u></p> <p>The successful bidder shall defend any and all suits and assume all liability for the use of any patented process including any device or article forming a part of the apparatus or any appliance furnished under the contract.</p> <p><u>INSURANCE PROVIDED BY BIDDER</u></p> <p><u>COMMERCIAL GENERAL LIABILITY INSURANCE</u></p> <p>The successful bidder shall, during the performance of the contract and for three (3) years following acceptance of the product, keep in force at least the following minimum limits of commercial general liability insurance:</p> <p>Each Occurrence\$1,000,000</p> <p>Products/Completed Operations Aggregate\$1,000,000</p> <p>Personal and Advertising Injury\$1,000,000</p> <p>General Aggregate\$2,000,000</p> <p>Coverage shall be written on a Commercial General Liability form. The policy shall be written on an occurrence form and shall include Contractual Liability coverage for bodily injury and property damage subject to the terms and conditions of the policy. The policy shall include Owner as an additional insured when required by written contract.</p> <p><u>COMMERCIAL AUTOMOBILE LIABILITY INSURANCE</u></p> <p>The successful bidder shall, during the performance of the contract, keep in force at least the following minimum limits of commercial automobile liability insurance and coverage shall be written on a Commercial Automobile liability form:</p> <p>Each Accident Combined Single Limit: \$1,000,000</p> <p><u>UMBRELLA/EXCESS LIABILITY INSURANCE</u></p> <p>The successful bidder shall, during the performance of the contract and for three (3) years following acceptance of the product, keep in force at least the following minimum limits of umbrella liability insurance:</p> <p>Aggregate:\$3,000,000</p>		

	Bidder Complies	
	Yes	No
<p>Each Occurrence: \$3,000,000</p> <p>The umbrella policy shall be written on an occurrence basis and at a minimum provide excess to the bidder's General Liability and Automobile Liability policies.</p> <p>The required limits can be provided by one (1) or more policies provided all other insurance requirements are met.</p> <p>Coverage shall be provided by a carrier(s) rated A- or better by A.M. Best.</p> <p>All policies shall provide a 30-day notice of cancellation to the named insured. The Certificate of Insurance shall provide the following cancellation clause: Should any of the above described policies be cancelled before the expiration date thereof, notice shall be delivered in accordance with the policy provisions.</p> <p>Bidder agrees to furnish owner with a current Certificate of Insurance with the coverages listed above along with the bid. The certificate shall show the purchaser as certificate holder.</p> <p><u>INSURANCE PROVIDED BY MANUFACTURER</u></p> <p><u>PRODUCT LIABILITY INSURANCE</u></p> <p>The manufacturer shall, during the performance of the contract and for three (3) years following acceptance of the product, keep in force at least the following minimum limits of Product Liability insurance:</p> <p>Each Occurrence\$1,000,000</p> <p>Products/Completed Operations Aggregate\$1,000,000</p> <p>Coverage shall be written on a Commercial General Liability form. The policy shall be written on an occurrence form. The manufacturer's policy shall include the owner as additional insured when required by written contract between the Owner and a manufacturer's authorized dealer.</p> <p><u>UMBRELLA/EXCESS LIABILITY INSURANCE</u></p> <p>The manufacturer shall, during the performance of the contract and for three (3) years following acceptance of the product, keep in force at least the following minimum limits of umbrella liability insurance:</p> <p>Each Occurrence: \$25,000,000</p> <p>Aggregate: \$25,000,000</p> <p>The umbrella policy shall be written on an occurrence basis and provide excess to the manufacturer's General Liability/Products policies.</p>		

	Bidder Complies	
	Yes	No
<p>The required limits can be provided by one (1) or more policies provided all other insurance requirements are met.</p> <p>Coverage shall be provided by a carrier(s) rated A- or better by A.M. Best.</p> <p>All policies shall provide a 30-day notice of cancellation to the named insured. The Certificate of Insurance shall provide the following cancellation clause: Should any of the above described policies be cancelled before the expiration date thereof, notice shall be delivered in accordance with the policy provisions.</p> <p>Manufacturer agrees to furnish owner with a current Certificate of Insurance with the coverages listed above along with the bid. The certificate shall show the purchaser as the certificate holder.</p> <p><u>SINGLE SOURCE MANUFACTURER</u></p> <p>Bids shall only be accepted from a single source apparatus manufacturer. The definition of single source is a manufacturer that designs and manufactures their products using an integrated approach, including the chassis, cab weldment, cab, pump house (including the sheet metal enclosure, valve controls, piping and operators panel) body and aerial device being designed, fabricated and assembled on the bidder's premises. The electrical system (hardwire or multiplex) shall be both designed and integrated by the same apparatus manufacturer. The warranties relative to these major components (excluding component warranties such as engine, transmission, axles, pump, etc.) must be from a single source manufacturer and not split between manufacturers (i.e. body, pump house, cab weldment, chassis and aerial). The bidder shall provide evidence that they comply with this requirement.</p> <p>The bidder shall state the location of the factory where the apparatus is to be built.</p> <p><u>NFPA 2016 STANDARDS</u></p> <p>This unit shall comply with the NFPA standards effective January 1, 2016, except for fire department specifications that differ from NFPA specifications. These exceptions shall be set forth in the Statement of Exceptions.</p> <p>Certification of slip resistance of all stepping, standing, and walking surfaces shall be supplied with delivery of the apparatus.</p> <p>All horizontal surfaces designated as a standing or walking surface that are greater than 48.00" above the ground must be defined by a 1.00" wide line along its outside perimeter. Perimeter markings and designated access paths to destination points shall be identified on the customer approval print and are shown as approximate. Actual location(s) shall be determined based on materials used and actual conditions at final build. Access paths may pass through hose storage areas and opening or removal of covers or restraints may be required. Access paths may require the operation of devices and equipment such as the aerial device or ladder rack.</p>		

	Bidder Complies	
	Yes	No
<p>A plate that is highly visible to the driver while seated shall be provided. This plate shall show the overall height, length, and gross vehicle weight rating.</p> <p>The manufacturer shall have programs in place for training, proficiency testing and performance for any staff involved with certifications.</p> <p>An official of the company shall designate, in writing, who is qualified to witness and certify test results.</p> <p><u>NFPA COMPLIANCY</u></p> <p>Apparatus proposed by the bidder shall meet the applicable requirements of the National Fire Protection Association (NFPA) as stated in current edition at time of contract execution. Fire department's specifications that differ from NFPA specifications shall be indicated in the proposal as "non-NFPA".</p> <p><u>VEHICLE INSPECTION PROGRAM CERTIFICATION</u></p> <p>To assure the vehicle is built to current NFPA standards, the apparatus, in its entirety, shall be third-party, independent, audit-certified through Underwriters Laboratory (UL) that it is built and complies to all applicable standards in the current edition of NFPA 1901. The certification includes: all design, production, operational, and performance testing of not only the apparatus, but those components that are installed on the apparatus (no exception).</p> <p>A placard shall be affixed in the driver's side area stating the third-party agency, the date, the standard and the certificate number of the whole vehicle audit.</p> <p><u>INSPECTION CERTIFICATE</u></p> <p>A third-party inspection certificate for the aerial device shall be furnished upon delivery of the aerial device. The certificate shall be Underwriters Laboratories Inc. Type 1 and shall indicate that the aerial device has been inspected on the production line and after final assembly.</p> <p>Visual structural inspections shall be performed on all welds on both aluminum and steel ladders.</p> <p>On critical weld areas, or on any suspected defective area, the following tests shall be conducted:</p> <ul style="list-style-type: none"> - Magnetic particle inspection shall be conducted on steel aerials to assure the integrity of the weldments and to detect any flaws or weaknesses. Magnets shall be placed on each side of the weld while iron powder is placed on the weld itself. The powder shall detect any crack that may exist. This test shall conform to ASTM E709 and be performed prior to assembly of the aerial device. - A liquid penetrant test shall be conducted on aluminum aerials to assure the integrity of the weldments and to detect any flaws or weaknesses. This test shall conform to ASTM E165 and be performed prior to assembly of the aerial device. 		

	Bidder Complies	
	Yes	No
<p>- Ultrasonic inspection shall conducted on all aerials to detect any flaws in pins, bolts and other critical mounting components.</p> <p>In addition to the tests above, functional tests, load tests, and stability tests shall be performed on all aerials. These tests shall determine any unusual deflection, noise, vibration, or instability characteristics of the unit.</p> <p><u>PUMP TEST</u></p> <p>The pump shall be tested, approved, and certified by Underwriter's Laboratory at the manufacturer's expense. The test results and the pump manufacturer's certification of hydrostatic test; the engine manufacturer's certified brake horsepower curve; and the manufacturer's record of pump construction details shall be forwarded to the Fire Department.</p> <p><u>BREATHING AIR TEST</u></p> <p>If the unit has breathing air, the apparatus manufacturer shall draw an air sample from the air system and certify that the air quality meets the requirements of NFPA 1989, <i>Standard on Breathing Air Quality for Fire and Emergency Services Respiratory Protection</i>.</p> <p><u>BID BOND</u></p> <p>All bidders shall provide a bid bond as security for the bid in the form of a 10% bid bond to accompany their bid. This bid bond shall be issued by a Surety Company who is listed on the U.S. Treasury Departments list of acceptable sureties as published in Department Circular 570. The bid bond shall be issued by an authorized representative of the Surety Company and shall be accompanied by a certified power of attorney dated on or before the date of bid. The bid bond shall include language, which assures that the bidder/principal shall give a bond or bonds as may be specified in the bidding or contract documents, with good and sufficient surety for the faithful performance of the contract, including the Basic One (1) Year Limited Warranty, and for the prompt payment of labor and material furnished in the prosecution of the contract.</p> <p>Proposals received from bidders who do not manufacture the chassis shall provide a warranty that shall be issued jointly and severally by, and signed by, both the bidder and the chassis manufacturer.</p> <p>If the successful bidder does not manufacture the chassis, the bidder shall supply a warranty bond, in addition to their performance bond, along with their signed contract. This warranty bond shall guarantee all terms and conditions of the Basic One (1) Year Limited Warranty and names both the bidder and chassis manufacturer as co-principals. This warranty bond shall be issued for the contract amount and shall remain in force for a term which is consistent with the term of the Basic One (1) Year Limited Warranty.</p> <p>Notwithstanding any document or assertion to the contrary, any surety bond related to the sale of a vehicle shall apply only to the Basic One (1) Year Limited Warranty for such vehicle. Any surety bond related to the sale of a vehicle shall not apply to any other warranties that are included within this bid (OEM or otherwise) or to the warranties (if any) of any third party of any</p>		

	Bidder Complies	
	Yes	No
<p>part, component, attachment or accessory that is incorporated into or attached to the vehicle. In the event of any contradiction or inconsistency between this provision and any other document or assertion, this provision shall prevail.</p> <p><u>PERFORMANCE BOND, 1 YEAR</u></p> <p>The successful bidder shall furnish a Performance and Payment bond (Bond) equal to 100 percent of the total contract amount within 30 days of the notice of award. Such Bond shall be in a form acceptable to the Owner and issued by a surety company included within the Department of Treasury's Listing of Approved Sureties (Department Circular 570) with a minimum A.M. Best Financial Strength Rating of A and Size Category of XV. In the event of a bond issued by a surety of a lesser Size Category, a minimum Financial Strength rating of A+ is required.</p> <p>Bidder and Bidder's surety agree that the Bond issued hereunder, whether expressly stated or not, also includes the surety's guarantee of the vehicle manufacturer's Bumper to Bumper warranty period included within this proposal. Owner agrees that the penal amount of this bond shall be simultaneously amended to 100 percent percent of the total contract amount upon satisfactory acceptance and delivery of the vehicle(s) included herein. Notwithstanding anything contained within this contract to the contrary, the surety's liability for any warranties of any type shall not exceed one (1) years from the date of such satisfactory acceptance and delivery, or the actual Bumper to Bumper warranty period, whichever is shorter.</p> <p><u>BID AND APPROVAL DRAWING</u></p> <p>A drawing of the proposed apparatus shall be provided with the submitted bid package for customer approval. The sales representative shall also have a copy of the same drawing. The finalized and approved drawing shall become part of the contract documents. This drawing shall indicate the chassis make and model, location of the lights, siren, horns, compartments, major components, etc.</p> <p>A "revised" approval drawing of the apparatus shall be prepared and submitted by the manufacturer to the purchaser showing any changes made to the approval drawing.</p> <p><u>NON-COLLUSIVE BIDDING CERTIFICATION</u></p> <p>By Submission of this bid, each bidder and each person signing on behalf of any bidder, certifies, and in the case of joint bid each party therefore certifies as to its own organization, under penalty of perjury, that to the best of their knowledge and belief:</p> <p>-The prices in this bid have been arrived at independently without collusion, consultation, communication, or agreement, for purpose of restricting competition, as to any matter relating to sale price with any other bidder or any competitor.</p> <p>- Unless otherwise required by law, the prices that have been quoted in this bid have not been knowingly disclosed by the bidder and shall not knowingly be disclosed by the bidder prior to opening, directly or indirectly, to any other bidder or to any competitor.</p> <p>-No attempt has been made by the bidder to induce any other person, partnership, or</p>		

	Bidder Complies	
	Yes	No
<p>corporation to submit or not to submit a bid for the purpose of restricting competition.</p> <p>-That all requirements by law including amendatory provisions as to non-collusive bidding have been complied with.</p> <p><u>CUSTOMER REFERENCE LIST</u> A customer reference list shall be provided with each bid. The reference list shall include a minimum of five (5) Departments within South Carolina who currently operate the brand of apparatus being bid. Reference information shall include but not limited to Department name, contact information and make/model of apparatus in service.</p> <p><u>SOUTH CAROLINA DEALER LICENSE</u> Each bidder shall provide with bid a valid and current copy of their South Carolina Dealer License as issued by the South Carolina Department of Motor Vehicles.</p> <p>This license requirement is to assure the bidder is legally authorized to engage in the sale of motor vehicles within the State of South Carolina.</p> <p><u>LOCAL SERVICE FACILITY</u> Each bidder shall provide with bid proof of dealer owned and operated Service Facility located within the State of South Carolina along with factory trained service personnel. Service personnel shall be factory trained to handle parts and warranty repair for their respective manufacturer.</p> <p>The dealer owned, and operated Service Facility shall have a minimum of five (5) years of operation demonstrating stability and longevity in service after the sale.</p> <p>In addition, local Service Facility shall have the capability to dispatch factory trained service technicians with dealer operated mobile service units to Department location for field service repairs.</p> <p><u>DEALER GARAGE LIABILITY</u> Bidder shall provide at time of bid proof of dealer garage liability insurance with minimum coverage of \$2,000,000.00.</p> <p><u>PRE-CONSTRUCTION CONFERENCE</u> A pre-construction conference shall be held at the manufacturer's facility to review approval drawing package. Motel, meals, and travel (commercial airlines) expenses for Three (3) Department personnel shall be the responsibility of the successful bidder. The sales representative for this project shall be present and assist in the conference.</p> <p><u>CONSTRUCTION PROGRESS PHOTOS</u> The successful bidder shall provide weekly photographs of the apparatus or the major components as they are being constructed. The photos shall commence at the beginning of the manufacturing process and shall continue until just prior to the final inspection. There shall be approximately Eight (8) weekly reports illustrating the progress of the apparatus through the course of each week. Special attention shall be given to show the unique features and aspects of the apparatus as construction progresses.</p>		

	Bidder Complies	
	Yes	No
<p><u>FINAL INSPECTION</u> A final inspection shall be provided at the manufacturer's facility for inspection of the completed unit. Motel, meals, and travel (commercial airlines) expenses for Three (3) Department personnel shall be the responsibility of the successful bidder. The sales representative shall be present and assist in the inspection process.</p> <p><u>DELIVERY</u> Following final inspection at the manufacturing facility, the Apparatus, to ensure proper break in of all components while still under warranty, shall be delivered under its own power to local Dealership. Dealership shall perform a full Pre-Delivery Inspection of the Apparatus by manufacturer's certified technicians. This shall include an inspection of all components of the Apparatus and if any inoperable components are detected they shall be repaired before delivery to Department.</p> <p><u>ORIENTATION TRAINING</u> There shall be one (1) class held at the Fire Department by a factory certified trainer. The class shall consist of basic orientation of the apparatus and shall last approximately 3 hours. The class shall cover basic operations of cab, chassis, pump, and body components that are included on the new apparatus.</p> <p><u>PLAQUE FOR APPARATUS</u> There shall be one (1) recognition plaque twelve inches by ten inches in size provided and installed with the appropriate lettering as provided by the customer.</p> <p><u>CHASSIS</u> The chassis provided shall be a new, tilt-type custom fire apparatus. The chassis shall be manufactured in the apparatus body builder's facility, eliminating any split responsibility. The chassis shall be designed and manufactured for heavy-duty service, with adequate strength and capacity for the intended load to be sustained and the type of service required.</p> <p><u>WHEELBASE</u> The wheelbase of the vehicle shall be no greater than 265.00".</p> <p><u>OVERALL LENGTH</u> The overall length of the apparatus shall not exceed 43' – 1.50"</p> <p><u>GVW RATING</u> The gross vehicle weight rating shall be a minimum of 78,000 lbs.</p> <p><u>FRAME</u> The chassis frame shall be built with two (2) steel channels bolted to five (5) cross members or more, depending on other options of the apparatus.</p> <p>The side rails shall have a 13.38" tall web over the front and mid sections of the chassis, with a continuous smooth taper to 10.75" over the rear axle.</p>		

	Bidder Complies	
	Yes	No
<p>Each rail shall have a section modulus of 25.992 cubic inches and a resisting bending moment (rbm) of 3,119,040 in-lb over the critical regions of the frame assembly, with a section modulus of 18.96 cubic inches with an rbm of 2,275,200 in-lb over the rear axle.</p> <p>The frame rails shall be constructed of 120,000 psi yield strength heat-treated 0.38" thick steel with 3.50" wide flanges.</p> <p><u>FRAME REINFORCEMENT</u></p> <p>In addition, a full-length mainframe internal "C" liner shall be provided. It shall be heat-treated steel measuring 12.50" x 3.00" x 0.25". Each liner shall have a section modulus of 13.58 cubic inches, yield strength of 110,000 psi, and rbm of 857,462 in-lb. Total rbm at wheelbase center shall be 4,391,869 in-lb.</p> <p>The frame liner shall be mounted inside of the chassis frame rail and extend the full length of the frame.</p> <p><u>FRONT NON-DRIVE AXLE</u></p> <p>The front axle shall be of the independent suspension design with a ground rating of 24,000 lb.</p> <p>Upper and lower control arms shall be used on each side of the axle. Upper control arm castings shall be made of 100,000-psi yield strength 8630 steel and the lower control arm casting shall be made of 55,000-psi yield ductile iron.</p> <p>The center cross members and side plates shall be constructed out of 80,000-psi yield strength steel.</p> <p>Each control arm shall be mounted to the center section using elastomer bushings. These rubber bushings shall rotate on low friction plain bearings and be lubricated for life. Each bushing shall also have a flange end to absorb longitudinal impact loads, reducing noise and vibrations.</p> <p>There shall be nine (9) grease fittings supplied, one (1) on each control arm pivot and one (1) on the steering gear extension.</p> <p>The upper control arm shall be shorter than the lower arm so that wheel end geometry provides positive camber when deflected below rated load and negative camber above rated load.</p> <p>Camber at load shall be 0 degrees for optimum tire life.</p> <p>The ball joint bearing shall be of low friction design and be maintenance free.</p> <p>Toe links that are adjustable for alignment of the wheel to the center of the chassis shall be provided.</p> <p>The wheel ends must have little to no bump steer when the chassis encounters a hole or obstacle.</p>		

	Bidder Complies	
	Yes	No
<p>The steering linkage shall provide proper steering angles for the inside and outside wheel, based on the vehicle wheelbase.</p> <p>The axle shall have a third party certified turning angle of 40 degrees. Front discharge, front suction, or aluminum wheels shall not infringe on this cramp angle.</p> <p><u>FRONT SUSPENSION</u></p> <p>Front independent suspension shall be provided with a minimum ground rating of 24,000 lb.</p> <p>The independent suspension system shall be designed to provide maximum ride comfort. The design shall allow the vehicle to travel at highway speeds over improved road surfaces and at moderate speeds over rough terrain with minimal transfer of road shock and vibration to the vehicle's crew compartment.</p> <p>Each wheel shall have a torsion bar type spring. In addition, each front wheel end shall also have energy absorbing jounce bumpers to prevent bottoming of the suspension.</p> <p>The suspension design shall be such that there is at least 10.00" of total wheel travel and a minimum of 3.75" before suspension bottoms.</p> <p>The torsion bar anchor lock system allows for simple lean adjustments, without the use of shims. One can adjust for a lean within 15 minutes per side. Anchor adjustment design is such that it allows for ride height adjustment on each side.</p> <p>The independent suspension shall have gone through a durability test that simulated a minimum of 140,000 miles of inner city driving.</p> <p><u>FRONT SHOCK ABSORBERS</u></p> <p>KONI heavy-duty telescoping shock absorbers shall be provided on the front suspension.</p> <p><u>FRONT OIL SEALS</u></p> <p>Oil seals with viewing window shall be provided on the front axle.</p> <p><u>FRONT TIRES</u></p> <p>Front tires shall be Goodyear radials 445/65R22.50, 20 ply all-position G296 MSA tread, rated for 24,600 lb maximum axle load and 68 mph maximum speed.</p> <p>The tires shall be mounted on Alcoa 22.50" x 13.00" polished aluminum disc type wheels with a ten (10)stud, 11.25" bolt circle.</p> <p><u>REAR AXLE</u></p> <p>The rear axle shall be a Meritor™, Model RT-52-185, tandem axle assembly with a capacity of 54,000 lb.</p> <p>An inter-axle differential, which divides torque evenly between axles, shall be provided with an indicator light mounted on the cab instrument panel.</p>		

	Bidder Complies	
	Yes	No
<p><u>TOP SPEED OF VEHICLE</u> A rear axle ratio shall be furnished to allow the vehicle to reach a top speed of 60 mph.</p> <p><u>REAR SUSPENSION</u> Rear suspension shall be a Hendrickson Model FMX 542 EX, air ride with a ground rating of 54,000 pounds. The suspension shall have the following features:</p> <ul style="list-style-type: none"> - Outboard vertical mounted heavy-duty shock absorbers - Utilizes track bars and torque rods to restrict lateral axle movement and maintain constant pinion angles - Super heavy-duty transverse beam to help reduce axle stress while increasing roll stability or resistance to lean - Low spring rate air springs for excellent ride quality - Dual height control valves to maintain level vehicle from side to side <p><u>REAR OIL SEALS</u> Oil seals shall be provided on the rear axle(s).</p> <p><u>REAR TIRES</u> Rear tires shall be eight (8) Goodyear 12R22.50 radials, 16 ply all season G622 RSD tread, rated for 54,240 lb maximum axle load and 75 mph maximum speed.</p> <p>The tires shall be mounted on Alcoa© 22.50" x 8.25" polished aluminum disc wheels with a ten (10) stud 11.25" bolt circles.</p> <p><u>TIRE BALANCE</u> All tires shall be balanced with Counteract balancing beads. The beads shall be inserted into the tire and eliminate the need for wheel weights.</p> <p><u>TIRE PRESSURE MANAGEMENT</u> There shall be a RealWheels LED AirSecure™ tire alert pressure management system provided, that shall monitor each tire's pressure. A sensor shall be provided on the valve stem of each tire for a total of 10 tires.</p> <p>The sensor shall calibrate to the tire pressure when installed on the valve stem for pressures between 10 and 200 psi. The sensor shall activate an integral battery-operated LED when the pressure of that tire drops 5 to 8 psi.</p> <p>Removing the cap from the sensor shall indicate the functionality of the sensor and battery. If the sensor and battery are in working condition, the LED shall immediately start to flash.</p>		

	Bidder Complies	
	Yes	No
<p><u>FRONT HUB COVERS</u> Stainless steel hub covers shall be provided on the front axle. An oil level viewing window shall be provided.</p> <p><u>REAR HUB COVERS</u> Stainless steel, high hat, hub covers shall be provided on the rear axle hubs.</p> <p><u>CHROME LUG NUT COVERS</u> Chrome lug nut covers shall be supplied on front and rear wheels.</p> <p><u>EXTENDER, VALVE STEM</u> A pair of 180-degree valve stem extenders shall be installed on the valve stems of the rear outside tires. The extender shall allow the tire pressure monitor cap to face the outside.</p> <p><u>MUD FLAPS</u> Mud flaps shall be installed behind the front and rear wheels of the apparatus.</p> <p><u>WHEEL CHOCKS</u> There shall be one (1) pair of folding Ziamatic, Model SAC-44-E, aluminum alloy, Quick-Choc wheel blocks with easy-grip handle provided.</p> <p><u>WHEEL CHOCK BRACKETS</u> There shall be one (1) pair of Zico, Model SQCH-44-H, horizontal mounting wheel chock brackets provided for the Ziamatic, Model SAC-44-E, folding wheel chocks. The brackets shall be made of aluminum and consist of a quick release spring loaded rod to hold the wheel chocks in place. The brackets shall be mounted rearward of the left side rear tire.</p> <p><u>ELECTRONIC STABILITY CONTROL</u> A vehicle control system shall be provided as an integral part of the ABS brake system from Meritor Wabco.</p> <p>The system shall monitor and update the lateral acceleration of the vehicle and compare it to a critical threshold where a side roll event may occur. If the critical threshold is met, the vehicle control system shall automatically reduce engine RPM, engage the engine retarder (if equipped), and selectively apply brakes to the individual wheel ends of the front and rear axles to reduce the possibility of a side roll event.</p> <p>The system shall monitor directional stability through a lateral accelerometer, steer angle sensor and yaw rate sensor. If spinout or drift out is detected, the vehicle control system shall selectively apply brakes to the individual wheel ends of the front and rear axles to bring the vehicle back to its intended direction.</p> <p><u>ANTI-LOCK BRAKE SYSTEM</u> The vehicle shall be equipped with a Wabco 6S6M, anti-lock braking system. The ABS shall provide a six (6) channel anti-lock braking control on both the front and rear wheels. A digitally</p>		

	Bidder Complies	
	Yes	No
<p>controlled system that utilizes microprocessor technology shall control the anti-lock braking system. Each wheel shall be monitored by the system. When any wheel begins to lockup, a signal shall be sent to the control unit. This control unit shall then reduce the braking of that wheel for a fraction of a second and then reapply the brake. This anti-lock brake system shall eliminate the lockup of any wheel thus helping to prevent the apparatus from skidding out of control.</p> <p><u>AUTOMATIC TRACTION CONTROL</u></p> <p>An anti-slip feature shall be included with the ABS. The Automatic Traction Control shall be used for traction in poor road and weather conditions. The Automatic Traction Control shall act as an electronic differential lock that shall not allow a driving wheel to spin, thereby supplying traction at all times. The ABS electronic control unit (ECU) shall work with the engine ECU, sharing information concerning wheel slip. Engine ECU shall use information to control engine speed, allowing only as much throttle application as required for the available traction, regardless of how much the driver is asking for. An "off road traction" switch shall be provided on the instrument panel. Activation of the switch shall allow additional tire slip to let the truck climb out and get on top of deep snow or mud.</p> <p><u>BRAKES</u></p> <p>The service brake system shall be full air type.</p> <p>The front brakes shall be Knorr/Bendix disc type with a 17.00" ventilated rotor for improved stopping distance.</p> <p>The brake system shall be certified, third party inspected, for improved stopping distance.</p> <p>The rear brakes shall be Meritor™ 16.50" x 7.00" cam operated with automatic slack adjusters. Dust shields shall be provided.</p> <p><u>BRAKE SYSTEM AIR COMPRESSOR</u></p> <p>The air compressor shall be a Cummins/WABCO with 18.7 cubic feet per minute output.</p> <p><u>BRAKE SYSTEM</u></p> <p>The brake system shall include:</p> <ul style="list-style-type: none"> • Bendix dual brake treadle valve • Heated automatic moisture ejector on air dryer • Total air system capacity of 6,653 cubic inches • Two (2) air pressure gauges with a red warning light and an audible alarm, that activates when air pressure falls below 60 psi • Spring set parking brake system • Parking brake operated by a push-pull style control valve • A parking "brake on" indicator light on instrument panel 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Park brake relay/inversion and anti-compounding valve, in conjunction with a double check valve system, shall be provided with an automatic spring brake application at 40 psi • A pressure protection valve shall be provided to prevent all air operated accessories from drawing air from the air system when the system pressure drops below 80 psi (550 kPa). • Quarter turn drain valves on each air tank <p>The air tank shall be primed and painted to meet a minimum 750-hour salt spray test.</p> <p>To reduce the effects of corrosion, the air tank shall be mounted with stainless steel brackets (no exception).</p> <p><u>BRAKE SYSTEM AIR DRYER</u></p> <p>The air dryer shall be WABCO System Saver 1200 with spin-on coalescing filter cartridge and 100-watt heater.</p> <p><u>BRAKE LINES</u></p> <p>Color-coded nylon brake lines shall be provided. The lines shall be wrapped in a heat protective loom where necessary in the chassis.</p> <p><u>AIR INLET/OUTLET</u></p> <p>One (1) air inlet/outlet shall be installed with the female coupling located on the driver side pump panel. This system shall tie into the "wet" tank of the brake system and include a check valve in the inlet line and an 85-psi pressure protection valve in the outlet line. The air outlet shall be controlled by a needle valve.</p> <p>A mating male fitting shall be provided with the loose equipment.</p> <p>The air inlet shall allow a shoreline air hose to be connected to the vehicle. This shall allow station air to be supplied to the brake system of the vehicle to insure constant air pressure.</p> <p><u>ALL WHEEL LOCK-UP</u></p> <p>An additional all wheel lock-up system shall be installed which applies air to the front brakes only. The standard spring brake control valve system shall be used for the rear.</p> <p><u>ADDITIONAL AIR TANK FOR AIR HORN</u></p> <p>An additional air tank with 1,454 cubic inch displacement shall be provided to increase the capacity of the air system. This tank shall be dedicated for air horn use.</p> <p>The air tank shall be primed and painted to meet a minimum 750-hour salt spray test. To reduce the effects of corrosion, the air tank shall be mounted with stainless steel brackets (no exception).</p>		

		Bidder Complies																							
		Yes	No																						
<p>The output flow of the engine air compressor varies with engine rpm. Full compressor output is only achieved at governed engine speed. Engine speed may be limited by generators, pumps and other PTO driven options.</p> <p><u>REMOTE AIR TANK DRAIN</u></p> <p>There shall be a remote cable-controlled drain valve installed on each air supply reservoir. The drain valve shall be actuated from the side of the vehicle and be a vinyl covered stainless steel cable, firmly attached to the underside of the vehicle. A loop shall be provided at the cable end for ease of pulling the drain.</p> <p><u>COMPRESSION FITTINGS</u></p> <p>Any nylon tube on the apparatus that is pneumatic shall be plumbed with compression type fittings where applicable. Push lock fittings shall not be acceptable for any pneumatic nylon tube plumbing.</p> <p><u>ENGINE</u></p> <p>The chassis shall be powered by an electronically controlled engine as described below:</p> <table><tr><td>Make:</td><td>Cummins®</td></tr><tr><td>Model:</td><td>X15</td></tr><tr><td>Power:</td><td>565 hp at 1800 rpm</td></tr><tr><td>Torque:</td><td>1850 lb-ft at 1200 rpm</td></tr><tr><td>Governed Speed:</td><td>2100 rpm</td></tr><tr><td>Emissions Level:</td><td>EPA 2017</td></tr><tr><td>Fuel:</td><td>Diesel</td></tr><tr><td>Cylinders:</td><td>Six (6)</td></tr><tr><td>Displacement:</td><td>912 cubic inches (14.9L)</td></tr><tr><td>Starter:</td><td>Delco 39MT+™</td></tr><tr><td>Fuel Filters:</td><td>Frame mounted spin-on style primary filter with water separator and water-in-fuel sensor. Engine mounted secondary spin-on style filter.</td></tr></table> <p>The engine shall include On-board diagnostics (OBD), which provides self diagnostic and reporting. The system shall give the owner or repair technician access to state of health information for various vehicle sub systems. The system shall monitor vehicle systems, engine and after treatment. The system shall illuminate a malfunction indicator light on the dash console if a problem is detected.</p> <p><u>HIGH IDLE</u></p> <p>A high idle switch shall be provided, inside the cab, on the instrument panel, that shall automatically maintain a preset engine rpm. A switch shall be installed, at the cab instrument panel, for activation/deactivation.</p>		Make:	Cummins®	Model:	X15	Power:	565 hp at 1800 rpm	Torque:	1850 lb-ft at 1200 rpm	Governed Speed:	2100 rpm	Emissions Level:	EPA 2017	Fuel:	Diesel	Cylinders:	Six (6)	Displacement:	912 cubic inches (14.9L)	Starter:	Delco 39MT+™	Fuel Filters:	Frame mounted spin-on style primary filter with water separator and water-in-fuel sensor. Engine mounted secondary spin-on style filter.		
Make:	Cummins®																								
Model:	X15																								
Power:	565 hp at 1800 rpm																								
Torque:	1850 lb-ft at 1200 rpm																								
Governed Speed:	2100 rpm																								
Emissions Level:	EPA 2017																								
Fuel:	Diesel																								
Cylinders:	Six (6)																								
Displacement:	912 cubic inches (14.9L)																								
Starter:	Delco 39MT+™																								
Fuel Filters:	Frame mounted spin-on style primary filter with water separator and water-in-fuel sensor. Engine mounted secondary spin-on style filter.																								

	Bidder Complies	
	Yes	No
<p>The high idle shall be operational only when the parking brake is on and the truck transmission is in neutral. A green indicator light shall be provided, adjacent to the switch. The light shall illuminate when the above conditions are met. The light shall be labeled "OK to Engage High Idle."</p> <p><u>ENGINE BRAKE</u></p> <p>A Jacobs® engine brake is to be installed with the controls located on the instrument panel within easy reach of the driver.</p> <p>The driver shall be able to turn the engine brake system on/off and have a high, medium and low setting.</p> <p>The engine brake shall activate when the system is on and the throttle is released.</p> <p>The high setting of the brake application shall activate and work simultaneously with the variable geometry turbo (VGT) provided on the engine.</p> <p>The engine brake shall be installed in such a manner that when the engine brake is slowing the vehicle the brake lights are activated.</p> <p>The ABS system shall automatically disengage the auxiliary braking device, when required.</p> <p><u>CLUTCH FAN</u></p> <p>A Horton® fan clutch shall be provided. The fan clutch shall be automatic when the pump transmission is in "Road" position, and fully engaged in "Pump" position.</p> <p><u>ENGINE AIR INTAKE</u></p> <p>An air intake with an ember separator (to prevent road dirt, burning embers, and recirculating hot air from entering the engine) shall be mounted at the front of the apparatus, on the passenger side of the engine.</p> <p>The ember separator shall be mounted in the air intake with flame retardant, roto-molded polyethylene housing. It shall be easily accessible by the hinged access panel at the front of the vehicle.</p> <p><u>EXHAUST SYSTEM</u></p> <p>The exhaust system shall include a Single Module™ aftertreatment device to meet current EPA standards. The exhaust system shall be stainless steel from the turbo to the inlet of the aftertreatment device and shall be 5.00" in diameter. An insulation wrap shall be provided on all exhaust pipes between the turbo and aftertreatment device to minimize the heat loss to the aftertreatment device. The exhaust shall terminate horizontally ahead of the right-side rear wheels. A tailpipe diffuser shall be provided to reduce the temperature of the exhaust as it exits. Heat deflector shields shall be provided to isolate chassis and body components from the heat of the tailpipe diffuser.</p>		

	Bidder Complies	
	Yes	No
<p><u>EXHAUST MODIFICATION</u></p> <p>The exhaust pipe shall be brought out from under the body at a 90-degree angle from the truck. The tail pipe shall extend a minimum of 2.00" past the body, adaptable for the Plymovent system. There shall be a clearance of 4.00" completely around the pipe once past the side of the body. A stop shall be provided on the tail pipe that shall prevent the nozzle from sliding too far on.</p> <p><u>RADIATOR</u></p> <p>The radiator and the complete cooling system shall meet or exceed NFPA and engine manufacturer cooling system standards.</p> <p>For maximum corrosion resistance and cooling performance, the entire radiator core shall be constructed using long life aluminum alloy. The core shall be made of aluminum fins, having a serpentine design, brazed to aluminum tubes. The tubes shall be brazed to aluminum headers. No solder joints or leaded material of any kind shall be acceptable in the core assembly. The radiator core shall have a minimum frontal area of 1434 square inches. Supply tank made of glass-reinforced nylon and a return tank of cast aluminum alloy shall be crimped on to the core assembly using header tabs and a compression gasket to complete the radiator core assembly. The radiator shall be compatible with commercial antifreeze solutions.</p> <p>There shall be a full steel frame around the entire radiator core assembly. The radiator core assembly shall be isolated within the steel frame by rubber inserts to enhance cooling system durability and reliability. The radiator shall be mounted in such a manner as to prevent the development of leaks caused by twisting or straining when the apparatus operates over uneven ground. The radiator assembly shall be isolated from the chassis frame rails with rubber isolators.</p> <p>The radiator assembly shall include an integral deaeration tank permanently mounted to the top of the radiator framework, with a readily accessible remote-mounted overflow tank. For visual coolant level inspection, the radiator shall have a built-in sight glass. The radiator shall be equipped with a 15-psi pressure relief cap.</p> <p>A drain port shall be located at the lowest point of the cooling system and/or the bottom of the radiator to permit complete flushing of the coolant from the system.</p> <p>A heavy-duty fan shall draw in fresh, cool air through the radiator. Shields or baffles shall be provided to prevent recirculation of hot air to the inlet side of the radiator.</p> <p><u>COOLANT LINES</u></p> <p>Gates® silicone hoses shall be used for all engine/heater coolant lines installed by the chassis manufacturer.</p> <p>The chassis manufacturer shall also use Gates brand hose on other heater, defroster, and auxiliary coolant circuits. There shall be some areas in which an appropriate Gates product is</p>		

	Bidder Complies	
	Yes	No
<p>not available. In those instances, a comparable silicone hose from another manufacturer shall be used.</p> <p>Hose clamps shall be stainless steel "constant torque type" to prevent coolant leakage. They shall react to temperature changes in the cooling system and expand or contract accordingly while maintaining a constant clamping pressure on the hose.</p> <p><u>FUEL TANK</u></p> <p>A 65-gallon fuel tank shall be provided and mounted at the rear of the chassis. The tank shall be constructed of 12-gauge, hot rolled steel. It shall be equipped with swash partitions and a vent. To eliminate the effects of corrosion, the fuel tank shall be mounted with stainless steel straps (no exception).</p> <p>A 0.75" drain plug shall be provided in a low point of the tank for drainage.</p> <p>A fill inlet shall be located on the left-hand side of the body and be covered with a hinged, spring loaded, stainless steel door that is marked "Ultra Low Sulfur - Diesel Fuel Only."</p> <p>A 0.50" diameter vent shall be provided running from top of tank to just below fuel fill inlet.</p> <p>The tank shall meet all FHWA 393.67 requirements including a fill capacity of 95 percent of tank volume.</p> <p>All fuel lines shall be provided as recommended by the engine manufacturer.</p> <p><u>DIESEL EXHAUST FLUID TANK</u></p> <p>A 4.5-gallon diesel exhaust fluid (DEF) tank shall be provided and mounted in the driver's side body forward of the rear axle.</p> <p>A 0.50" drain plug shall be provided in a low point of the tank for drainage.</p> <p>A fill inlet shall be located on the driver's side of the body and be covered with a hinged, spring loaded, brushed stainless steel door that is marked "Diesel Exhaust Fluid Only".</p> <p>The tank shall meet the engine manufacturers requirement for 10 percent expansion space in the event of tank freezing.</p> <p>The tank shall include an integrated heater unit that utilizes engine coolant to thaw the DEF in the event of freezing.</p> <p><u>FUEL SHUTOFF</u></p> <p>A shutoff valve shall be installed in the fuel line, at the fuel tank.</p> <p><u>FUEL COOLER</u></p> <p>An air to fuel cooler shall be installed in the engine fuel return line.</p> <p>The fuel filler cap shall have a retaining chain and holder provided on the fuel fill door.</p>		

	Bidder Complies	
	Yes	No
<p><u>FUEL SEPARATOR</u></p> <p>The engine shall be equipped with a Racor in-line spin-on fuel and water separator in addition to the engine fuel filters.</p> <p><u>TRANSMISSION</u></p> <p>An Allison 5th generation, model EVS 4500P, electronic, torque converting, automatic transmission shall be provided.</p> <p>The transmission shall be equipped with prognostics to monitor oil life, filter life, and transmission health. A wrench icon on the shift selector's digital display shall indicate when service is due.</p> <p>Two (2) PTO openings shall be located on left side and top of converter housing (positions 8 o'clock and 1 o'clock).</p> <p>A transmission temperature gauge with red light and buzzer shall be installed on the cab instrument panel.</p> <p><u>TRANSMISSION SHIFTER</u></p> <p>A six (6)-speed push button shift module shall be mounted to right of driver on console. Shift position indicator shall be indirectly lit for after dark operation.</p> <p>The transmission ratio shall be: 1st - 4.70 to 1.00, 2nd - 2.21 to 1.00, 3rd - 1.53 to 1.00, 4th - 1.00 to 1.00, 5th - 0.76 to 1.00, 6th - 0.67 to 1.00, R - 5.55 to 1.00.</p> <p><u>TRANSMISSION COOLER</u></p> <p>A Modine plate and fin transmission oil cooler shall be provided using engine coolant to control the transmission oil temperature.</p> <p><u>DOWNSHIFT MODE (W/ENGINE BRAKE)</u></p> <p>The transmission shall be provided with an aggressive downshift mode.</p> <p>This shall provide earlier transmission downshifts to 3rd gear from 6th gear, resulting in improved engine braking performance.</p> <p><u>DRIVELINE</u></p> <p>Drivelines shall be a heavy-duty metal tube and be equipped with Spicer® 1810 universal joints.</p> <p>The shafts shall be dynamically balanced before installation.</p> <p>A splined slip joint shall be provided in each driveshaft where the driveline design requires it. The slip joint shall be coated with Glidecoat® or equivalent.</p> <p><u>STEERING</u></p> <p>Dual Sheppard, Model M110, steering gears, with integral heavy-duty power steering, shall be provided. For reduced system temperatures, the power steering shall incorporate an air to oil</p>		

	Bidder Complies	
	Yes	No
<p>cooler and an Eaton, Model VN20, hydraulic pump with integral pressure and flow control. All power steering lines shall have wire braded lines with crimped fittings.</p> <p>A tilt and telescopic steering column shall be provided to improve fit for a broader range of driver configurations.</p> <p><u>STEERING WHEEL</u></p> <p>The steering wheel shall be 18.00" in diameter, have tilting and telescoping capabilities, and a 4-spoke design.</p> <p><u>LOGO AND CUSTOMER DESIGNATION ON DASH</u></p> <p>The dash panel shall have an emblem containing the fire apparatus manufacturer's logo and customer name. The emblem shall have three (3) rows of text for the customer's department name. There shall be a maximum of eight (8) characters in the first row, 11 characters in the second row and 11 characters in the third row.</p> <p>The first row of text shall be: Orangeburg</p> <p>The second row of text shall be: Public</p> <p>The third row of text shall be: Safety</p> <p><u>BUMPER</u></p> <p>An aluminum bumper, minimum of 10.00" high shall be attached to a bolted modular frame extension. The bumper shall be extended 15.00" from front face of cab. The bumper shall be metal finished and painted job color.</p> <p><u>Gravel Pan</u></p> <p>A gravel pan, constructed of bright aluminum treadplate, shall be furnished between the bumper and cab face. The gravel pan shall be properly supported from the underside to prevent flexing and vibration of the aluminum treadplate.</p> <p><u>LIFT AND TOW MOUNTS</u></p> <p>Mounted to the frame extension shall be lift and tow mounts. The lift and tow mounts shall be designed and positioned to adapt to certain tow truck lift systems.</p> <p>The lift and tow mounts with eyes shall be painted the same color as the frame.</p> <p><u>TOW HOOKS</u></p> <p>No tow hooks are to be provided. This truck shall be equipped with a lift and tow package with integral tow eyes.</p> <p><u>FRONT BUMPER LINE-X COATING</u></p> <p>Protective black Line-X® coating shall be provided on the outside exterior of the top front bumper flange. It shall not be sprayed on the underside of the flange.</p>		

	Bidder Complies	
	Yes	No
<p>The lining shall be properly installed by an authorized Line-X dealer.</p> <p><u>CAB</u></p> <p>The cab shall be designed specifically for the fire service and shall be manufactured by the chassis builder.</p> <p>To provide quality at the source and single source customer support, the cab shall be built by the apparatus manufacturer in a facility located on the manufacturer's premises (no exception).</p> <p>For reasons of structural integrity and enhanced occupant protection, the cab shall be of heavy duty design, constructed to the following minimal standards.</p> <p>The cab shall have 12 main vertical structural members located in the A-pillar (front cab corner posts), B-pillar (side center posts), C-pillar (rear corner posts) and rear wall areas. The A-pillar shall be constructed of 0.25" heavy wall extrusions joined by a solid A356-T6 aluminum joint casting. The B-pillar and C-pillar shall also be constructed from 0.25" heavy wall extrusions. The rear wall shall be constructed of two (2) 4.00" x 2.00" outer aluminum extrusions and two (2) 3.00" x 2.00" inner aluminum extrusions. All main vertical structural members shall run from the floor to 7.50" x 3.50" x 0.125" thick roof extrusions to provide a cage-like structure with the A-pillar and roof extrusions being welded into a 0.75" thick corner casting at each of the front corners of the roof assembly.</p> <p>The front of the cab shall be constructed of a 0.25" thick firewall, covered with a 0.125" front skin (for a total thickness of 0.38"), and reinforced with 24.50" wide x 10.00" deep x 0.50" thick supports on each side of the engine tunnel. The cross-cab support shall be welded to the A-pillar, 0.25" firewall, and engine tunnel, on the left and right sides.</p> <p>The cab floors shall be constructed of 0.1875" thick aluminum plate and reinforced at the firewall with an additional 0.25" thick cross-floor support providing a total thickness of 0.44" of structural material at the front floor area. The front floor area shall also be supported with three (3) 0.50" plates bolted together that also provides the mounting point for the cab lift. This tubing shall run from the front of the cab to the 0.1875" thick engine tunnel, creating the structure to support the forces created when lifting the cab.</p> <p>The cab shall be a full-tilt style. A 3-point cab mount system with rubber isolators shall improve ride quality by isolating chassis vibrations from the cab.</p> <p>The crew cab shall be a totally enclosed design with the interior area completely open to improve visibility and verbal communication between the occupants.</p> <p>The overall height (from the cab roof to the ground) shall be approximately 102.00". The overall height listed shall be calculated based on a truck configuration with the lowest suspension weight ratings, the smallest diameter tires for the suspension, no water weight, no loose equipment weight, and no personnel weight. Larger tires, wheels, and suspension shall increase the overall height listed.</p>		

	Bidder Complies	
	Yes	No
<p>The cab shall have an interior width of not less than 93.50". The driver and passenger seating positions shall have a minimum 24.00" clear width at knee level.</p> <p>To reduce injuries to occupants in the seated positions, proper head clearance shall be provided. The floor-to-ceiling height inside the forward cab shall be no less than 60.25". The floor-to-ceiling height inside the crew cab shall be no less than 52.95" in the center position and 58.75" in the outboard positions.</p> <p>The crew cab shall measure a minimum of 57.50" from the rear wall to the backside of the engine tunnel (knee level) for optimal occupant legroom.</p> <p><u>INTERIOR CAB INSULATION</u></p> <p>The cab walls, ceiling and engine tunnel shall be insulated in all strategic locations to maximize acoustic absorption and thermal insulation. The cab shall be insulated with 2.00" insulation in the rear wall, 3.00" insulation in the side walls, and 1.50" insulation in the ceiling.</p> <p><u>FENDER LINERS</u></p> <p>Full-circular, aluminum inner fender liners in the wheel wells shall be provided.</p> <p><u>PANORAMIC WINDSHIELD</u></p> <p>A one (1)-piece, safety glass windshield with more than 2,802 square inches of clear viewing area shall be provided. The windshield shall be full width and shall provide the occupants with a panoramic view. The windshield shall consist of three (3) layers: the outer light, the middle safety laminate, and the inner light. The 0.114" thick outer light layer shall provide superior chip resistance. The middle safety laminate layer shall prevent the windshield glass pieces from detaching in the event of breakage. The inner light shall provide yet another chip resistant layer. The cab windshield shall be bonded to the aluminum windshield frame using a urethane adhesive. A custom frit pattern shall be applied on the outside perimeter of the windshield for a finished automotive appearance.</p> <p><u>WINDSHIELD WIPERS</u></p> <p>Three (3) electric windshield wipers with a washer, in conformance with FMVSS and SAE requirements, shall be provided. The wiper blades shall be 21.65" long and together shall clear a minimum of 1,783 square inches of the windshield for maximum visibility in inclement weather.</p> <p>The windshield washer fluid reservoir shall be located at the front of the vehicle and be accessible through the access hood for simple maintenance.</p> <p><u>FAST SERVICE ACCESS FRONT TILT HOOD</u></p> <p>A full-width access hood shall be provided for convenient access to engine coolant, steering fluid, wiper fluid, cab lift controls, headlight power modules, and ember separator. The hood shall also provide complete access to the windshield wiper motor and components. The hood shall be contoured to provide a sleek, automotive appearance. The hood shall be constructed of two (2) fiberglass panels bonded together and shall include reinforcing ribs for structural integrity. The hood shall include air cylinders to hold the hood in open and closed positions, and</p>		

	Bidder Complies	
	Yes	No
<p>a heavy-duty latch system that shall meet FMVSS 113 (Hood Latch System). The spring-loaded hood latch shall be located at the center of the hood with a double-action release lever located behind the upper grille. The two (2)-step release requires the lever first be pulled to the driver side until the hood releases from the first latch (primary latch) then to the passenger side to fully release the hood (secondary latch).</p> <p><u>ENGINE TUNNEL</u></p> <p>To provide structural strength, the engine tunnel sidewalls shall be constructed of .50" aluminum plate that is welded to both the .25" firewall and .38" heavy wall extrusion under the crew cab floor. To maximize occupant space, the top edges shall be tapered.</p> <p>The engine tunnel shall be insulated on both sides for thermal and acoustic absorption. The underside of the tunnel shall be covered with 1.00" thick polyether foam that is reinforced with an aluminized face. Thermal rating for this insulation shall be -40 degrees Fahrenheit to 300 degrees Fahrenheit. The insulation shall keep noise (dBA) levels at or lower than the specifications in the current edition of the NFPA 1901 standards.</p> <p><u>CAB REAR WALL EXTERIOR COVERING</u></p> <p>The exterior surface of the rear wall of the cab shall be overlaid with bright aluminum treadplate except for areas that are not typically visible when the cab is lowered.</p> <p><u>CAB LIFT</u></p> <p>A hydraulic cab lift system shall be provided, consisting of an electric-powered hydraulic pump, fluid reservoir, dual lift cylinders, remote cab lift controls and all necessary hoses and valves. The hydraulic pump shall have a backup manual override, for use in the event of an electrical failure.</p> <p>The cab lift controls shall be located at the driver side front of the cab, easily accessible under the full width front access hood. The controls shall include a permanently mounted raise/lower switch. For enhanced visibility during cab tilt operations, a remote-control tether with on/off switch shall be supplied on a coiled cord that shall extend from 2.00' (coiled) to 6.00' (extended).</p> <p>The cab shall be capable of tilting 42 degrees and 80 degrees with crane assist to accommodate engine maintenance and removal. The cab pivots shall be located 46.00" apart to provide stability while tilting the cab.</p> <p>The rear of the cab shall be locked down by a two (2)-point, automatic, hydraulic, double hook mechanism that fully engages after the cab has been lowered (self-locking). The dual 2.25" diameter hydraulic cylinders shall be equipped with a velocity fuse that protects the cab from accidentally descending when the cab is in the tilt position.</p> <p>For increased safety, a redundant mechanical stay arm shall be provided that must be manually put in place on the driver side between the chassis and cab frame when cab is in the raised position. This device shall be manually stowed to its original position before the cab can be lowered.</p>		

	Bidder Complies	
	Yes	No
<p><u>Cab Lift Interlock</u></p> <p>The cab lift safety system shall be interlocked to the parking brake. The cab tilt mechanism shall be active only when the parking brake is set, and the ignition switch is in the on position. If the parking brake is released, the cab tilt mechanism shall be disabled.</p> <p>The cab lift safety system shall also be interlocked to the front stabilizers in the bumper. The cab tilt mechanism shall be active only when the front stabilizers are fully stowed, and fully tilted outboard. The cab tilt mechanism shall not allow the front stabilizers to be tilted inboard until the cab has been fully lowered and locked into position.</p> <p><u>GRILLE</u></p> <p>A bright finished aluminum mesh grille screen, inserted behind a formed bright finished grille surround, shall be provided on the front center of the cab, and shall serve as an air intake to the radiator.</p> <p><u>DOOR JAMB SCUFFPLATES</u></p> <p>All cab door jambs shall be furnished with a brushed stainless steel scuffplate, mounted on the striker side of the jamb.</p> <p><u>STEP WELL SCUFFPLATES</u></p> <p>All cab step wells shall have a brushed stainless steel scuffplate to cover the vertical surfaces within the step well.</p> <p><u>FRONT CAB TRIM</u></p> <p>There shall be polished stainless-steel rectangular garnish plates installed behind the two (2) headlight bezels for an enhanced appearance.</p> <p>There shall be no covers provided over the painted cab corner where the cab turn signals are located.</p> <p><u>MIRRORS</u></p> <p>A Retraco, Model 613423, dual vision, motorized, west coast style mirror, with chrome finish, shall be mounted on each side of the front cab door with spring loaded retractable arms. The flat glass and convex glass shall be heated and adjustable with remote control within reach of the driver.</p> <p><u>CAB DOORS</u></p> <p>The forward cab and crew cab doors shall be the half-height style door. To enhance entry and egress to the cab, the forward cab doors shall be a minimum of 43.59" wide x 64.71" high. The crew cab doors shall measure a minimum of 37.87" wide x 64.71" high.</p> <p>The forward cab and crew cab doors shall be constructed of extruded aluminum with a nominal material thickness of 0.125". The exterior door skins shall be constructed from 0.090" aluminum.</p>		

	Bidder Complies	
	Yes	No
<p>The forward cab door windows shall include a 7.50" high x 10.00" wide drop area at the front to enhance visibility.</p> <p>A customized, vertical, pull-down type door handle shall be provided on the exterior of each cab door. The exterior handle shall be designed specifically for the fire service to prevent accidental activation and shall provide 4.00" wide x 2.00" deep hand clearance for ease of use with heavy gloved hands. Each door shall also be provided with an interior flush, open style paddle handle that shall be readily operable from fore and aft positions and be designed to prevent accidental activation. The interior handles shall provide 4.00" wide x 1.25" deep hand clearance for ease of use with heavy gloved hands.</p> <p>The cab doors shall be provided with both interior (rotary knob) and exterior (keyed) locks exceeding FMVSS standards. The keys shall be Model 751. The locks shall be capable of activating when the doors are open or closed. The doors shall remain locked if locks are activated when the doors are opened, then closed.</p> <p>A full length, heavy duty, stainless steel, piano-type hinge with a 0.38" pin and 11-gauge leaf shall be provided on all cab doors. There shall be double automotive-type rubber seals around the perimeter of the door framing and door edges to ensure a weather-tight fit.</p> <p>A chrome grab handle shall be provided on the inside of each cab and crew cab door.</p> <p>A red webbed grab handle shall be installed on the crew cab door stop strap. The grab handles shall be securely mounted.</p> <p>The cab steps at each cab door location shall be located below the cab doors and shall be exposed to the exterior of the cab.</p> <p><u>Door Panels</u></p> <p>The inner cab door panels shall be constructed out of brushed stainless steel. The cab door panels shall be removable.</p> <p><u>RECESSED POCKET WITH ELASTIC COVER</u></p> <p>To provide organized storage (clutter control) in the cab for miscellaneous equipment, the cab interior shall be provided with recessed storage pockets. The pockets shall be 5.63" wide x 2.00" high x 4.00" deep. The pockets shall be provided with a perforated elastic material cover to secure the equipment in the pocket. The pockets shall be installed in all available mounting locations of the overhead console.</p> <p><u>ELECTRIC WINDOW CONTROLS</u></p> <p>Each cab entry door shall be equipped with an electrically operated tempered glass window. A window control panel shall be located on the door panel within easy reach of the respective occupant. Each switch shall allow intermittent or auto down operation for ease of use. Auto down operation shall be actuated by holding the window down switch for approximately 1</p>		

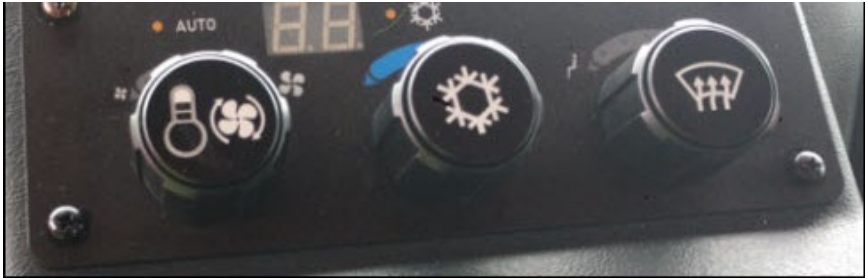
	Bidder Complies	
	Yes	No
<p>second. The driver control panel shall contain a control switch for each cab door's window. All other door control panels shall contain a single switch to operate the window within that door.</p> <p>The window switches shall be connected directly to the battery power. This allows the windows to be raised and lowered when the battery switch is in the off position.</p> <p><u>ELECTRIC CAB DOOR LOCKS</u></p> <p>The front driver and passenger doors shall have a door lock master switch (custom designed rotary lock knob) built into the interior door latch that shall control all front and rear side exit door locks. Each rear cab door shall have its own lock control. Each door shall have a keyed exterior lock mechanism built into the door handle assembly.</p> <p>There shall be one (1) concealed switch located Under Left Side front bumper.</p> <p>The lock system shall include two (2) key FOBs that allow for keyless entry into the vehicle. The key FOB system shall use code hopping technology for high security and be FCC part 15 compliant.</p> <p><u>DUAL STEPS</u></p> <p>A dual step shall be provided below each cab and crew cab door. The steps shall be designed with a grip pattern punched into bright aluminum treadplate material providing support, slip resistance, and drainage. The steps shall be a bolt-on design and provide a 24.00" wide x 9.00" deep stepping surface. The step design raises the middle step higher and closer to the cab floor, resulting in a 12.00" distance from the step to cab floor in the cab and a 13.50" distance from the step to cab floor in the crew cab. Stepping distances from the ground to first step shall be 16.50" and from first step to middle step shall be 12.00".</p> <p>The first step shall be lit by a white 12-volt DC LED light provided on the step.</p> <p><u>CAB EXTERIOR HANDRAILS</u></p> <p>A Hansen knurled aluminum handrail shall be provided adjacent to each cab and crew cab door opening to assist during cab ingress and egress. Each handrail shall be provided with red LED lights. The lights shall be activated with a separate switch in the cab and when the parking brake is applied. The LED lights may be load managed.</p> <p><u>STEP LIGHTS</u></p> <p>For reduced overall maintenance costs compared to incandescent lighting, there shall be four (4) white LED step lights provided. The lights shall be installed at each cab and crew cab door, one (1) per step. The lights shall be located in the driver side front doorstep, driver side crew cab doorstep, passenger side front doorstep and passenger side crew cab doorstep.</p> <p>In order to ensure exceptional illumination, each light shall provide a minimum of 25 foot-candles (fc) covering an entire 15.00" x 15.00" square placed 10.00" below the light and a minimum of 1.5 fc covering an entire 30.00" x 30.00" square at the same 10.00" distance below the light.</p>		

	Bidder Complies	
	Yes	No
<p>The lights shall be activated when the adjacent door is opened.</p> <p><u>FENDER CROWNS</u> Stainless steel fender crowns shall be installed at the cab wheel openings. The fender crowns shall have a radius outside corner that allows the fender crown to extend beyond the side wall of the front tires and allow the crew cab doors to open fully.</p> <p><u>GRAB HANDLE(S)</u> There shall be two (2) black offset rubber covered grab handle(s) mounted to be determined at the Preconstruction Meeting to assist in entering the cab and/or crew cab. The grab handle(s) shall be securely mounted.</p> <p><u>CREW CAB WINDOWS</u> One (1) fixed window with tinted glass shall be provided on each side of the cab, to the rear of the front cab door. The windows shall be sized to enhance light penetration into the cab interior. The windows shall measure 20.00" wide x 20.50" high.</p> <p><u>WINDOW INTERIOR TRIM</u> For improved aesthetics, the cab side windows shall include a vacuum formed ABS interior trim panel.</p> <p><u>STORAGE COMPARTMENT</u> Provided under the forward-facing crew cab seats shall be a transverse compartment. The compartment shall be divided into upper and lower sections by the cab floor. The upper section shall be 9.50" wide x 13.12" high x 26.25" deep (driver side) and 24.00" deep (passenger side). The top 7.38" of the upper compartments shall be full width (transverse) of the crew cab. The lower section on both sides shall be 9.50" wide x 16.50" high x 22.00" deep. The compartment shall extend from the bottom of the cab to top of the seat riser.</p> <p>There shall be two (2) reverse hinged double pan doors painted to match the cab exterior with a non-locking D-Ring latch, one (1) on each side of the cab. A cable for each exterior door shall be used as a door stop.</p> <p>The doors shall be D/A finished on the interior. The drop-down door inside the cab shall be polished stainless steel.</p> <p>The compartment interior shall be painted to match the cab interior.</p> <p><u>Compartment Lights</u> There shall be four (4) white LED strip lights, one (1) each hinged side of lower and upper exterior compartment door openings. The lights shall be controlled by an automatic door switch.</p>		

	Bidder Complies	
	Yes	No
<p><u>PIKE POLE STORAGE</u></p> <p>A rack shall be provided for storage of two (2) pike poles. The rack shall be located in the transverse section of the crew cab compartment, below the seat box. The poles shall be stored so that one (1) pole can be accessed out each side of the vehicle.</p> <p>The size and brand of the pike poles stored shall be Two Pike Poles, 6' Fire Hooks Unlimited, NY Roof Hook, Fiberglass, Pry End RH-6 .</p> <p><u>SCUFFPLATE</u></p> <p>A full height brushed stainless steel scuffplate shall be installed on the inside of each of the auxiliary cab compartment door pans.</p> <p><u>CAB INSULATION</u></p> <p>The cab insulation in the engine compartment shall have all open edges taped.</p> <p><u>SPECIAL FASTENERS (UNDER SIDE OF CAB INSULATION)</u></p> <p>All insulation in the cab engine tunnel and under the cab and crew cab floor shall be held in place by mechanical fasteners and large washers.</p> <p><u>CAB ROOF DRIP RAIL</u></p> <p>For enhanced protection from inclement weather, a drip rail shall be furnished on the sides of the cab. The drip rail shall be constructed of bright polished extruded aluminum and be bonded to the sides of the cab. The drip rail shall extend the full length of the cab roof.</p> <p><u>MOUNTING PLATE ON ENGINE TUNNEL</u></p> <p>Equipment installation provisions shall be installed on the engine tunnel.</p> <p>A 0.25" smooth aluminum plate shall be bolted to the top surface of the engine tunnel. The plate shall be located to the left of the officer and on the rear of the tunnel. It shall follow the contour of the engine tunnel and shall run the entire length of the engine tunnel. The plate shall be spaced off the engine tunnel 1.00" to allow for wire routing below the plate.</p> <p>The mounting surface shall be painted to match the cab interior.</p> <p><u>CAB INTERIOR</u></p> <p>With safety as the primary objective, the wrap-around style cab instrument panel shall be designed with unobstructed visibility to instrumentation. The dash layout shall provide the driver with a quick reference to gauges that allows more time to focus on the road.</p> <p>The center console shall be a high impact ABS polymer and shall be easily removable for access to the defroster. The center console shall include louvers strategically located for optimal air flow and defrost capability to the windshield.</p> <p>The passenger side dashboard shall be constructed of painted aluminum for durability and low maintenance. For enhanced versatility, the passenger side dash shall include a flat working surface.</p>		

	Bidder Complies	
	Yes	No
<p>To provide optional (service friendly) control panels, switches and storage modules, a painted aluminum overhead console shall also be provided.</p> <p>To complete the cab front interior design, painted aluminum modesty panels shall be provided under the dash on both sides of the cab. The driver side modesty panel shall provide mounting for the battery switch and diagnostic connectors, while the passenger side modesty panel provides a glove box, and ground access to the main electrical distribution panel via quick quarter turn fasteners.</p> <p>To provide a deluxe automotive interior, the engine tunnel, side walls and rear wall shall be covered by a leather grain vinyl that is resistant to oil, grease, and mildew.</p> <p>The headliner shall be installed in both forward and rear cab sections. The headliner panel shall be a composition of an aluminum panel covered with a sound barrier and upholstery.</p> <p>The cab structure shall include designated raceways for electrical harness routing from the front of the cab to the rear upper portion of the cab. Raceways shall be extruded in the forward door frame, floor, walls and overhead in the area where the walls meet the ceiling. The raceways located in the floor shall be covered by aluminum extrusion, while the vertical and overhead raceways shall be covered by painted aluminum covers. The raceways shall improve harness integrity by providing a continuous harness path that eliminates wire chafing and abrasion associated with exposed wiring or routing through drilled metal holes. Harnesses shall be laid in place. Routing through holes in tubing shall not be accepted due to chaffing that installation causes.</p> <p><u>CAB INTERIOR UPHOLSTERY</u></p> <p>The cab interior upholstery shall be 36 oz dark silver-gray vinyl. All cab interior materials shall meet FMVSS 302 (flammability of interior materials).</p> <p><u>CAB INTERIOR PAINT</u></p> <p>The following metal surfaces shall be painted black, vinyl textured paint:</p> <ul style="list-style-type: none"> • Modesty panel in front of driver • Vertical surface of dash in front of the officer (not applicable for recessed dash) • Glove box in front of the officer (if applicable) • Power distribution in front of the officer • Rear heater vent panels <p>The remaining cab interior metal surfaces shall be painted fire smoke gray, vinyl texture paint.</p> <p><u>CAB FLOOR</u></p> <p>The cab and crew cab floor areas shall be covered with Polydamp™ acoustical floor mat consisting of a black pyramid rubber facing and closed cell foam decoupler.</p>		

	Bidder Complies	
	Yes	No
<p>The top surface of the material has a series of raised pyramid shapes evenly spaced, which offer a superior grip surface. Additionally, the material has a 0.25" thick closed cell foam (no water absorption) which offers a sound dampening material for reducing sound levels.</p> <p><u>DEFROST/AIR CONDITIONING SYSTEM</u></p> <p>A ceiling mounted combination heater, defroster and air conditioning system shall be installed in the cab above the engine tunnel area.</p> <p><u>Cab Defroster</u></p> <p>A 54,000 BTU heater-defroster unit with 690 SCFM of air flow shall be provided inside the cab. The heater-defrost shall be installed in the forward portion of the cab ceiling. Air outlets shall be strategically located in the cab header extrusion per the following:</p> <ul style="list-style-type: none"> • One (1) adjustable shall be directed towards the left side cab window • One (1) adjustable shall be directed towards the right-side cab window • Six (6) fixed outlets shall be directed at the windshield <p>The defroster shall be capable of clearing 98 percent of the windshield and side glass when tested under conditions where the cab has been cold soaked at 0 degrees Fahrenheit for 10 hours, and a 2 ounce per square inch layer of frost/ice has been able to build up on the exterior windshield. The defroster system shall meet or exceed SAE J382 requirements.</p> <p><u>Cab/Crew Auxiliary Heater</u></p> <p>There shall be one (1) 31,000 BTU auxiliary heater with 560 SCFM of air flow provided in both the outboard rear facing seat risers with a dual scroll blower. An aluminum plenum incorporated into the cab structure used to transfer heat to the forward positions.</p> <p><u>Air Conditioning</u></p> <p>A 13.10 cubic inch compressor shall be installed on the engine.</p> <p>A roof-mounted condenser with a 78,000 BTU output at 2,400 SCFM that meets and exceeds the performance specification shall be installed on the cab roof. Mounting the condenser below the cab or body would reduce the performance of the system and shall not be acceptable. The condenser cover and mounting legs to be painted white as provided by the A/C manufacturer.</p> <p>The air conditioning system shall be capable of cooling the average cab temperature from 100 degrees Fahrenheit to 75 degrees Fahrenheit at 50 percent relative humidity within 30 minutes. The cooling performance test shall be run only after the cab has been heat soaked at 100 degrees Fahrenheit for a minimum of 4 hours.</p> <p>The evaporator unit shall be installed in the rear portion of the cab ceiling over the engine tunnel. The evaporator shall include one (1) high performance heating core, one (1) high performance cooling core with (1) plenum directed to the front and one (1) plenum directed to the rear of the cab.</p>		

	Bidder Complies	
	Yes	No
<p>The evaporator unit shall have a 52,000 BTU at 690 SCFM rating that meets and exceeds the performance specifications.</p> <p>Adjustable air outlets shall be strategically located on the forward plenum cover per the following:</p> <ul style="list-style-type: none"> • Four (4) shall be directed towards the seating position on the left side of the cab • Four (4) shall be directed towards the seating position on the right side of the cab <p>Adjustable air outlets shall be strategically located on the evaporator cover per the following:</p> <ul style="list-style-type: none"> • Five (5) shall be directed towards crew cab area <p>A high efficiency particulate air (HEPA) filter shall be included for the system. Access to the filter cover shall be secured with four (4) screws.</p> <p>The air conditioner refrigerant shall be R-134A and shall be installed by a certified technician.</p> <p><u>Climate Control</u></p> <p>An automotive style controller shall be provided to control the heat and air conditioning system within the cab. The controller shall have three (3) functional knobs for fan speed, temperature, and air flow distribution (front to rear) control.</p>  <p>The system shall control the temperature of the cab and crew cab automatically by pushing the center of the fan speed control knob. Rotate the center temperature control knob to set the cab and crew cab temperature.</p> <p>The AC system shall be manually activated by pushing the center of the temperature control knob.</p> <p>Pushing the center of the air flow distribution knob shall engage the AC for max defrost, setting the fan speeds to 100 percent and directing all air flow to the overhead forward position.</p> <p><u>Auxiliary AC System</u></p> <p>A larger condenser to include auxiliary unit components shall be mounted on the cab roof. Mounting the condenser below the cab or body would reduce the performance of the system and shall not be acceptable.</p>		

	Bidder Complies	
	Yes	No
<p>This shall allow the auto temperature controller to maintain a temperature of 70 degrees Fahrenheit while the engine of the apparatus is off. The auxiliary AC unit shall be powered from shoreline inlet.</p> <p><u>Gravity Drain Tubes</u></p> <p>Two (2) condensate drain tubes shall be provided for the air conditioning evaporator. The drip pan shall have two (2) drain tubes plumbed separately to allow for the condensate to exit the drip pan. No pumps shall be provided.</p> <p><u>COVER, AIR CONDITIONING LINES AND CONNECTIONS</u></p> <p>A formed cover shall be provided over the air conditioning lines and connections below the condenser. The cover shall be constructed of smooth aluminum. The cover shall be painted the same color as the air conditioning cover.</p> <p><u>AIR CONDITIONING SYSTEM PROTECTION</u></p> <p>The air conditioning system in the cab shall include system protection and diagnostics. The system shall include an electronic control module with LED diagnostic indicators, high side pressure transducer, charge sensor and a warning indicator on the instrument panel. The system shall provide the following control features:</p> <ul style="list-style-type: none"> - Air conditioning compressor clutch cycling limited to a maximum rate of four (4) cycles/minute, to reduce wear on the clutch in the event of a system failure. - Low charge warning at 50 degrees or lower refrigerant charge, for early detection of refrigerant and oil loss, to reduce repair cost associated with leaks. - Compressor clutch lockout at 30 degrees or lower refrigerant to protect compressor in the event of a leak. - Low battery voltage AC lock out to prevent damage from system operating at low voltage levels. <p><u>AIR CONDITIONING WARRANTY</u></p> <p>The manufacturer shall warrant the air conditioning compressor to be free of defects in material and workmanship for a period of three (3) years. All conditions of our standard chassis warranty (included with bid) shall apply except the warranty period on the air conditioning compressor shall be for three (3) years. The warranty covers material and labor for the air conditioning system compressor.</p> <p><u>SUN VISORS</u></p> <p>Two (2) smoked Lexan™ sun visors provided. The sun visors shall be located above the windshield with one (1) mounted on each side of the cab.</p> <p>There shall be no retention bracket provided to help secure each sun visor in the stowed position.</p>		

	Bidder Complies	
	Yes	No
<p><u>GRAB HANDLE</u></p> <p>A black rubber covered grab handle shall be mounted on the door post of the driver side and passenger side cab door to assist in entering the cab. The grab handle shall be securely mounted to the post area between the door and windshield.</p> <p><u>ENGINE COMPARTMENT LIGHTS</u></p> <p>There shall be one (1) Whelen, Model 3SC0CDCR, 12-volt DC, 3.00" white LED light(s) with Whelen, Model 3FLANGE, chrome flange kit(s) installed under the cab to be used as engine compartment illumination.</p> <p>These light(s) shall be activated automatically when the cab is raised.</p> <p><u>ACCESS TO ENGINE DIPSTICKS</u></p> <p>For access to the engine oil and transmission fluid dipsticks, there shall be a door on the engine tunnel, inside the crew cab. The door shall be on the rear wall of the engine tunnel, on the vertical surface. The door shall be 20.00" wide x 8.25" high and be flush with the wall of the engine tunnel.</p> <p>The engine oil dipstick shall allow for checking only. The transmission dipstick shall allow for both checking and filling. An additional port shall be provided for filling the engine oil.</p> <p>The door shall have a rubber seal for thermal and acoustic insulation. One (1) flush latch shall be provided on the access door.</p> <p><u>MAP BOX</u></p> <p>A special map box with nine (9) bins, open from top, shall be supplied and installed Determined at Final Inspection. The map box shall be 20.25" wide x 8.00" high (tapered down at sides and rear) and 23.25" front to back. The map box shall be constructed of 0.125" aluminum and shall be painted to match the cab interior.</p> <p><u>CAB SAFETY SYSTEM</u></p> <p>The cab shall be provided with a safety system designed to protect occupants in the event of a side roll or frontal impact, and shall include the following:</p> <ul style="list-style-type: none"> • A supplemental restraint system (SRS) sensor shall be installed on a structural cab member behind the instrument panel. The SRS sensor shall perform real time diagnostics of all critical subsystems and shall record sensory inputs immediately before and during a side roll or frontal impact event. • A slave SRS sensor shall be installed in the cab to provide capacity for eight (8) crew cab seating positions. • A fault-indicating light shall be provided on the vehicle's instrument panel allowing the driver to monitor the operational status of the SRS system. • A driver side front air bag shall be mounted in the steering wheel and shall be designed to protect the head and upper torso of the occupant, when used in combination with the 3-point seat belt. 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • A passenger side knee bolster air bag shall be mounted in the modesty panel below the dash panel and shall be designed to protect the legs of the occupant, when used in combination with the 3-point seat belt. • Air curtains shall be provided in the outboard bolster of outboard seat backs to provide a cushion between occupant and the cab wall. • Suspension seats shall be provided with devices to retract them to the lowest travel position during a side roll or frontal impact event. • Seat belts shall be provided with pre-tensioners to remove slack from the seat belt during a side roll or frontal impact event. <p><u>FRONTAL IMPACT PROTECTION</u></p> <p>The SRS system shall provide protection during a frontal or oblique impact event. The system shall activate when the vehicle decelerates at a predetermined G force known to cause injury to the occupants. The cab and chassis shall have been subjected, via third party test facility, to a crash impact during frontal and oblique impact testing. Testing included all major chassis and cab components such as mounting straps for fuel and air tanks, suspension mounts, front suspension components, rear suspensions components, frame rail cross members, engine and transmission and their mounts, pump house and mounts, frame extensions and body mounts. The testing provided configuration specific information used to optimize the timing for firing the safety restraint system. The sensor shall activate the pyrotechnic devices when the correct crash algorithm, wave form, is detected (no exception).</p> <p>The SRS system shall deploy the following components in the event of a frontal or oblique impact event:</p> <ul style="list-style-type: none"> • Driver side front air bag • Passenger side knee bolster air bag • Air curtains mounted in the outboard bolster of outboard seat backs • Suspension seats shall be retracted to the lowest travel position • Seat belts shall be pre-tensioned to firmly hold the occupant in place <p><u>SIDE ROLL PROTECTION</u></p> <p>The SRS system shall provide protection during a fast or slow 90-degree roll to the side, in which the vehicle comes to rest on its side. The system shall analyze the vehicle's angle and rate of roll to determine the optimal activation of the advanced occupant restraints.</p> <p>The SRS system shall deploy the following components in the event of a side roll:</p> <ul style="list-style-type: none"> • Air curtains mounted in the outboard bolster of outboard seat backs • Suspension seats shall be retracted to the lowest travel position • Seat belts shall be pre-tensioned to firmly hold the occupant in place <p><u>SEATING CAPACITY</u></p> <p>The seating capacity in the cab shall be four (4).</p>		

	Bidder Complies	
	Yes	No
<p><u>DRIVER SEAT</u></p> <p>A seat shall be provided in the cab for the driver. The seat design shall be a cam action type with air suspension. For increased convenience, the seat shall include electric controls to adjust the rake (15 degrees), height (1.75" travel) and horizontal (7.00" travel) position. Electric controls shall be located below the forward part of the seat cushion. To provide flexibility for multiple driver configurations, the seat shall have a reclining back, adjustable from 20 degrees back to 45 degrees forward. Providing for maximum comfort, the seat back shall be a high back style with manual lumbar adjustment lever, for lower back support, and shall include minimum 7.50" deep side bolster pads for maximum support. The lumbar adjustment lever shall be easily located at the lower outboard position of the seat cushion. For optimal comfort, the seat shall be provided with 17.00" deep dual density foam cushions designed with EVC (elastomeric vibration control).</p> <p>The seat shall include the following features incorporated into the side roll protection system:</p> <ul style="list-style-type: none"> • Side air curtain shall be mounted integral to the outboard bolster of the seat back. The air curtain shall be covered by a decorative panel when in the stowed position. • A suspension seat safety system shall be included. When activated in the event of a side roll, this system shall pretension the seat belt and retract the seat to its lowest travel position. <p>The seat shall be furnished with a 3-point, shoulder type seat belt. The seat belt shall be furnished with dual automatic retractors that shall provide ease of operation in the normal seating position.</p> <p><u>OFFICER SEAT</u></p> <p>A seat shall be provided in the cab for the officer. The seat shall be a fixed type, with no suspension. For optimal comfort, the seat shall be provided with 17.00" deep foam cushions. To ensure safe operation, the seat shall be equipped with seat belt sensors in the seat cushion and belt receptacle that shall activate an alarm indicating a seat is occupied but not buckled.</p> <p>The seat back shall be an SCBA back style with 7.5 degree fixed recline angle and shall include minimum 4.50" wide x 7.50" deep side bolster pads for maximum support. The SCBA cavity shall be adjustable from front to rear in 1.00" increments, to accommodate different sized SCBA cylinders. Moving the SCBA cavity shall be accomplished by unbolting, relocating, and re-bolting it in the desired location.</p> <p>The seat shall include the following features incorporated into the side roll protection system:</p> <ul style="list-style-type: none"> • Side air curtain shall be mounted integral to the outboard bolster of the seat back. The air curtain shall be covered by a decorative panel when in the stowed position. • A seat safety system shall be included. When activated, this system shall pretension the seat belt. 		

	Bidder Complies	
	Yes	No
<p>The seat shall be furnished with a 3-point, shoulder type seat belt. The seat belt shall be furnished with dual automatic retractors that shall provide ease of operation in the normal seating position.</p> <p><u>RADIO COMPARTMENT</u></p> <p>A compartment for the radio amplifier shall be located under the front passenger's seat. The size of the compartment shall be approximately 16.00" wide x 7.50" high x 16.50" deep. A drop-down door with a chrome plated lift and turn latch shall be provided for access. The compartment shall be constructed of smooth aluminum and painted to match the cab interior.</p> <p><u>REAR FACING DRIVER SIDE OUTBOARD SEAT</u></p> <p>There shall be one (1) rear facing seat provided at the driver side outboard position in the crew cab. For optimal comfort, the seat shall be provided with 17.00" deep dual density foam cushions designed with EVC (elastomeric vibration control). To ensure safe operation, the seat shall be equipped with seat belt sensors in the seat cushion and belt receptacle. It shall activate an alarm indicating a seat is occupied but not buckled.</p> <p>The seat back shall be an SCBA back style with 7.5 degree fixed recline angle, and shall include minimum 4.50" wide x 7.50" deep side bolster pads for maximum support. The SCBA cavity shall be adjustable from front to rear in 1.00" increments, to accommodate different sized SCBA cylinders. Moving the SCBA cavity shall be accomplished by unbolting, relocating, and re-bolting it in the desired location.</p> <p>The seat shall include the following features incorporated into the side roll protection system:</p> <ul style="list-style-type: none"> • Side air curtain shall be mounted integral to the outboard bolster of the seat back. The air curtain shall be covered by a decorative panel when in the stowed position. • A seat safety system shall be included. When activated, this system shall pretension the seat belt around the occupant to firmly hold them in place in the event of a side roll. <p>The seat shall be furnished with a 3-point, shoulder type seat belt. The seat belt shall be furnished with dual automatic retractors that shall provide ease of operation in the normal seating position.</p> <p><u>REAR FACING PASSENGER SIDE OUTBOARD SEAT</u></p> <p>There shall be one (1) rear facing seat provided at the passenger side outboard position in the crew cab. For optimal comfort, the seat shall be provided with 17.00" deep dual density foam cushions designed with EVC (elastomeric vibration control). To ensure safe operation, the seat shall be equipped with seat belt sensors in the seat cushion and belt receptacle that shall activate an alarm indicating a seat is occupied but not buckled.</p> <p>The seat back shall be an SCBA back style with 7.5 degree fixed recline angle and shall include minimum 4.50" wide x 7.50" deep side bolster pads for maximum support. The SCBA cavity shall be adjustable from front to rear in 1.00" increments to accommodate different sized SCBA</p>		

	Bidder Complies	
	Yes	No
<p>cylinders. Moving the SCBA cavity shall be accomplished by unbolting, relocating, and re-bolting it in the desired location.</p> <p>The seat shall include the following features incorporated into the side roll protection system:</p> <ul style="list-style-type: none"> • Side air curtain shall be mounted integral to the outboard bolster of the seat back. The air curtain shall be covered by a decorative panel when in the stowed position. • A seat safety system shall be included. When activated, this system shall pretension the seat belt and firmly hold the occupant in the event of a side roll. <p>The seat shall be furnished with a 3-point, shoulder type seat belt. The seat belt shall be furnished with dual automatic retractors that shall provide ease of operation in the normal seating position.</p> <p><u>FORWARD FACING CENTER CABINET</u></p> <p>A forward-facing cabinet shall be provided in the crew cab at the center position.</p> <p>The cabinet shall be 42.00" wide x 48.00" high x 24.00" deep. The cabinet shall be provided with no false floor. The interior door shall be web netting. The netting shall be made with 1.00" wide nylon material with 2.00" openings. The nylon webbing shall be permanently fastened at the bottom side of the cabinet and have 1.00" cam buckle fasteners on the opposite side to secure it. The clear door opening of the cabinet shall be 39.50" wide x 45.00" high.</p> <p>The cabinet shall include two (2) infinitely adjustable shelves with a 1.25" up turned lip painted to match the cab interior.</p> <p>The cabinet shall include no louvers.</p> <p>The cabinet shall be constructed of smooth aluminum and painted to match the cab interior.</p> <p><u>Cabinet Light</u></p> <p>There shall be one (1) white LED strip light installed on the right side of the interior cabinet door opening and one (1) white LED strip light installed on the left side of the interior cabinet door opening. The lighting shall be controlled by a rocker switch on the front of the cabinet.</p> <p><u>SEAT UPHOLSTERY</u></p> <p>All seat upholstery shall be leather grain 36 oz dark silver-gray vinyl resistant to oil, grease and mildew. The cab shall have four (4) seating positions.</p> <p><u>AIR BOTTLE HOLDERS</u></p> <p>All SCBA type seats in the cab shall have a "Hands-Free" auto clamp style bracket in its backrest. For efficiency and convenience, the bracket shall include an automatic spring clamp that allows the occupant to store the SCBA bottle by simply pushing it into the seat back. For protection of all occupants in the cab, in the event of an accident, the inertial components within the clamp shall constrain the SCBA bottle in the seat and shall exceed the NFPA standard of 9G. Bracket designs with manual restraints (belts, straps, buckles) that could be inadvertently</p>		

	Bidder Complies	
	Yes	No
<p>left unlocked and allow the SCBA to move freely within the cab during an accident, shall not be acceptable.</p> <p>There shall be a quantity of three (3) SCBA brackets.</p> <p><u>SEAT BELTS</u></p> <p>All seating positions in the cab, crew cab and tiller cab (if applicable) shall have red seat belts.</p> <p>To provide quick, easy use for occupants wearing bunker gear, the female buckle and seat belt webbing length shall meet or exceed the current edition of NFPA 1901 and CAN/ULC - S515 standards.</p> <p>The 3-point shoulder type seat belts shall also include the ReadyReach D-loop assembly to the shoulder belt system. The ReadyReach feature adds an extender arm to the D-loop location placing the D-loop in a closer, easier to reach location.</p> <p><u>SHOULDER HARNESS HEIGHT ADJUSTMENT</u></p> <p>All seating positions furnished with 3-point shoulder type seat belts shall include a height adjustment. This adjustment shall optimize the belts effectiveness and comfort for the seated firefighter.</p> <p>A total of four (4) seating positions shall have the adjustable shoulder harness.</p> <p><u>CAB DOME LIGHTS</u></p> <p>There shall be four (4) dual LED dome lights with black bezels provided. Two (2) lights shall be mounted above the inside shoulder of the driver and officer and two (2) lights shall be installed and located, one (1) on each side of the crew cab.</p> <p>The color of the LED's shall be red and white.</p> <p>The white LED's shall be controlled by the door switches and the lens switch.</p> <p>The color LED's shall be controlled by the lens switch.</p> <p>To ensure exceptional illumination, each white LED dome light shall provide a minimum of 10.1 foot-candles (fc) covering an entire 20.00" x 20.00" square seating position when mounted 40.00" above the seat.</p> <p><u>CAB INSTRUMENTATION</u></p> <p>The cab instrument panel shall consist of gauges, an LCD display, telltale indicator lights, alarms, control switches, and a diagnostic panel. The function of instrument panel controls and switches shall be identified by a label adjacent to each item. Actuation of the headlight switch shall illuminate the labels in low light conditions. Telltale indicator lamps shall not be illuminated unless necessary. The cab instruments and controls shall be conveniently located within the forward cab section directly forward of the driver. Gauge and switch panels shall be designed to be removable for ease of service and low cost of ownership.</p>		

	Bidder Complies	
	Yes	No
<p><u>GAUGES</u></p> <p>The gauge panel shall include the following ten (10) ivory gauges with chrome bezels to monitor vehicle performance:</p> <ul style="list-style-type: none"> • Voltmeter gauge (Volts) <ul style="list-style-type: none"> ○ Low volts (11.8 VDC) <ul style="list-style-type: none"> ▪ Amber indicator on gauge assembly with alarm ○ High volts (15 VDC) <ul style="list-style-type: none"> ▪ Amber indicator on gauge assembly with alarm ○ Very low volts (11.3 VDC) <ul style="list-style-type: none"> ▪ Amber indicator on gauge assembly with alarm ○ Very high volts (16 VDC) <ul style="list-style-type: none"> ▪ Amber indicator on gauge assembly with alarm • Tachometer (RPM) • Speedometer (Primary (outside) MPH, Secondary (inside) Km/H) • Fuel level gauge (Empty - Full in fractions) <ul style="list-style-type: none"> ○ Low fuel (1/8 full) <ul style="list-style-type: none"> ▪ Amber indicator on gauge assembly with alarm ○ Very low fuel (1/32) fuel <ul style="list-style-type: none"> ▪ Amber indicator on gauge assembly with alarm • Engine oil pressure gauge (PSI) <ul style="list-style-type: none"> ○ Low oil pressure to activate engine warning lights and alarms <ul style="list-style-type: none"> ▪ Red indicator on gauge assembly with alarm • Front air pressure gauge (PSI) <ul style="list-style-type: none"> ○ Low air pressure to activate warning lights and alarm <ul style="list-style-type: none"> ▪ Red indicator on gauge assembly with alarm • Rear air pressure gauge (PSI) <ul style="list-style-type: none"> ○ Low air pressure to activate warning lights and alarm <ul style="list-style-type: none"> ▪ Red indicator on gauge assembly with alarm • Transmission oil temperature gauge (Fahrenheit) <ul style="list-style-type: none"> ○ High transmission oil temperature activates warning lights and alarm <ul style="list-style-type: none"> ▪ Amber indicator on gauge assembly with alarm • Engine coolant temperature gauge (Fahrenheit) <ul style="list-style-type: none"> ○ High engine temperature activates an engine warning light and alarm <ul style="list-style-type: none"> ▪ Red indicator on gauge assembly with alarm • Diesel Exhaust Fluid Level Gauge (Empty - Full in fractions) <ul style="list-style-type: none"> ○ Low fluid (1/8 full) <ul style="list-style-type: none"> ▪ Amber indicator on gauge assembly with alarm <p>All gauges and gauge indicators shall perform prove out at initial power-up to ensure proper performance.</p>		

	Bidder Complies	
	Yes	No
<p><u>INDICATOR LAMPS</u></p> <p>To promote safety, the following telltale indicator lamps shall be integral to the gauge assembly and are located above and below the center gauges. The indicator lamps shall be "dead-front" design that is only visible when active. The colored indicator lights shall have descriptive text or symbols.</p> <p>The following amber telltale lamps shall be present:</p> <ul style="list-style-type: none"> • Low coolant • Trac cntl (traction control) (where applicable) • Check engine • Check trans (check transmission) • Aux brake overheat (Auxiliary brake overheat) • Air rest (air restriction) • Caution (triangle symbol) • Water in fuel • DPF (engine diesel particulate filter regeneration) • Trailer ABS (where applicable) • Wait to start (where applicable) • HET (engine high exhaust temperature) (where applicable) • ABS (antilock brake system) • MIL (engine emissions system malfunction indicator lamp) (where applicable) • SRS (supplemental restraint system) fault (where applicable) • DEF (low diesel exhaust fluid level) <p>The following red telltale lamps shall be present:</p> <ul style="list-style-type: none"> • Warning (stop sign symbol) • Seat belt • Parking brake • Stop engine • Rack down <p>The following green telltale lamps shall be provided:</p> <ul style="list-style-type: none"> • Left turn • Right turn • Battery on <p>The following blue telltale lamp shall be provided:</p> <ul style="list-style-type: none"> • High beam 		

	Bidder Complies	
	Yes	No
<p><u>ALARMS</u></p> <p>Audible steady tone warning alarm: A steady audible tone alarm shall be provided whenever a warning message is present.</p> <p>Audible pulsing tone caution alarm: A pulsing audible tone alarm (chime/chirp) shall be provided whenever a caution message is present without a warning message being present.</p> <p>Alarm silence: Any active audible alarm shall be able to be silenced by holding the ignition switch at the top position for 3 to 5 seconds. For improved safety, silenced audible alarms shall intermittently chirp every 30 seconds until the alarm condition no longer exists. The intermittent chirp shall act as a reminder to the operator that a caution or warning condition still exists. Any new warning or caution condition shall enable the steady or pulsing tones, respectively.</p> <p><u>INDICATOR LAMP AND ALARM PROVE-OUT</u></p> <p>Telltale indicators and alarms shall perform prove-out at initial power-up to ensure proper performance.</p> <p><u>CONTROL SWITCHES</u></p> <p>For ease of use, the following controls shall be provided immediately adjacent to the cab instrument panel within easy reach of the driver.</p> <p>Emergency master switch: A molded plastic push button switch with integral indicator lamp shall be provided. Pressing the switch shall activate emergency response lights and siren control. A green lamp on the switch provides indication that the emergency master mode is active. Pressing the switch again disables the emergency master mode.</p> <p>Headlight / Parking light switch: A three (3)-position maintained rocker switch shall be provided. The first switch position shall deactivate all parking lights and the headlights. The second switch position shall activate the parking lights. The third switch position shall activate the headlights.</p> <p>Panel backlighting intensity control switch: A three (3)-position momentary rocker switch shall be provided. The first switch position decreases the panel backlighting intensity to a minimum level as the switch is held. The second switch position is the default position that does not affect the backlighting intensity. The third switch position increases the panel backlighting intensity to a maximum level as the switch is held.</p> <p>The following standard controls shall be integral to the gauge assembly and are located below the right-hand gauges. All switches have backlit labels for low light applications.</p> <p>High idle engagement switch: A two (2)-position momentary rocker switch with integral indicator lamp shall be provided. The first switch position is the default switch position. The second switch position shall activate and deactivate the high idle function when pressed and released. The "Ok to Engage High Idle" indicator lamp must be active for the high idle function to engage.</p>		

	Bidder Complies	
	Yes	No
<p>A green indicator lamp integral to the high idle engagement switch shall indicate when the high idle function is engaged.</p> <p>"Ok to Engage High Idle" indicator lamp: A green indicator light shall be provided next to the high idle activation switch to indicate that the interlocks have been met to allow high idle engagement.</p> <p>The following standard controls shall be provided adjacent to the cab gauge assembly within easy reach of the driver. All switches shall have backlit labels for low light applications.</p> <p>Ignition switch: A three (3)-position maintained/momentary rocker switch shall be provided. The first switch position shall deactivate vehicle ignition. The second switch position shall activate vehicle ignition. The third momentary position shall disable the Command Zone audible alarm if held for three (3) to five (5) seconds. A green indicator lamp shall be activated with vehicle ignition.</p> <p>Engine start switch: A two (2)-position momentary rocker switch shall be provided. The first switch position is the default switch position. The second switch position shall activate the vehicle's engine. The switch actuator is designed to prevent accidental activation.</p> <p>4-way hazard switch: A two (2)-position maintained rocker switch shall be provided. The first switch position shall deactivate the 4-way hazard switch function. The second switch position shall activate the 4-way hazard function. The switch actuator shall be red and includes the international 4-way hazard symbol.</p> <p>Heater, defroster, and optional air conditioning control panel: A control panel with membrane switches shall be provided to control heater/defroster temperature and heater, defroster, and air conditioning fan speeds. A green LED status bar shall indicate the relative temperature and fan speed settings.</p> <p>Turn signal arm: A self-canceling turn signal with high beam headlight and windshield wiper/washer controls shall be provided. The windshield wiper control shall have high, low, and intermittent modes.</p> <p>Parking brake control: An air actuated push/pull park brake control valve shall be provided.</p> <p>Chassis horn control: Activation of the chassis horn control shall be provided through the center of the steering wheel.</p> <p><u>CUSTOM SWITCH PANELS</u></p> <p>The design of cab instrumentation shall allow for emergency lighting and other switches to be placed within easy reach of the operator thus improving safety. There shall be positions for up to four (4) switch panels in the overhead console on the driver's side, up to four (4) switch panels in the engine tunnel console facing the driver, up to four (4) switch panels in the</p>		

	Bidder Complies	
	Yes	No
<p>overhead console on the officer's side and up to two (2) switch panels in the engine tunnel console facing the officer. All switches shall have backlit labels for low light applications.</p> <p><u>DIAGNOSTIC PANEL</u></p> <p>A diagnostic panel shall be accessible while standing on the ground and located inside the driver's side door left of the steering column. The diagnostic panel shall allow diagnostic tools such as computers to connect to various vehicle systems for improved troubleshooting providing a lower cost of ownership. Diagnostic switches shall allow ABS systems to provide blink codes should a problem exist.</p> <p>The diagnostic panel shall include the following:</p> <ul style="list-style-type: none"> • Engine diagnostic port • Transmission diagnostic port • ABS diagnostic port • SRS diagnostic port (where applicable) • Command Zone USB diagnostic port • ABS diagnostic switch (blink codes flashed on ABS telltale indicator) • Diesel particulate filter regeneration switch (where applicable) • Diesel particulate filter regeneration inhibit switch (where applicable) <p><u>CAB LCD DISPLAY</u></p> <p>A digital four (4)-row by 20-character dot matrix display shall be integral to the gauge panel. The display shall be capable of showing simple graphical images as well as text. The display shall be split into three (3) sections. Each section shall have a dedicated function. The upper left section shall display the outside ambient temperature.</p> <p>The upper right section shall display, along with other configuration specific information:</p> <ul style="list-style-type: none"> • Odometer • Trip mileage • PTO hours • Fuel consumption • Engine hours <p>The bottom section shall display INFO, CAUTION, and WARNING messages. Text messages shall automatically activate to describe the cause of an audible caution or warning alarm. The LCD shall be capable of displaying multiple text messages should more than one caution or warning condition exist.</p> <p><u>AIR RESTRICTION INDICATOR</u></p> <p>A high air restriction warning indicator light LCD message with amber warning indicator and audible alarm shall be provided.</p>		

	Bidder Complies	
	Yes	No
<p><u>"DO NOT MOVE APPARATUS" INDICATOR</u></p> <p>A flashing red indicator light, located in the driving compartment, shall be illuminated automatically per the current NFPA requirements. The light shall be labeled "Do Not Move Apparatus If Light Is On".</p> <p>The same circuit that activates the Do Not Move Apparatus indicator shall activate a steady tone alarm when the parking brake is released.</p> <p>There shall be a switch located in the cab to deactivate or silence the alarm selected. The alarm system shall reactivate after the parking brake is applied and released.</p> <p><u>DO NOT MOVE TRUCK MESSAGES</u></p> <p>Messages shall be displayed on the Command Zone™, color display located within sight of the driver whenever the Do Not Move Truck light is active. The messages shall designate the item or items not in the stowed for vehicle travel position (parking brake released).</p> <p>The following messages shall be displayed (where applicable):</p> <ul style="list-style-type: none"> • Do Not Move Truck • LS CAB DOOR, the left side cab door is open • LS CAB COMPT DOOR, the left side cab compartment door is open • LS CREWCAB DOOR, the left side crew cab door is open • STEP NOT STOWED, pump house step not stowed • LS TURNTABLE STEP, left side turntable step not stowed • AERIAL CONTROL DR, aerial override control compartment door is open • LS6 COMPT DR, the left side LS6 compartment door is open • LS5 COMPT DR, the left side LS5 compartment door is open • LS4 COMPT DR, the left side LS4 compartment door is open • LS3 COMPT DR, the left side LS3 compartment door is open • LS2 COMPT DR, the left side LS2 compartment door is open • LS1 COMPT DR, the left side LS1 compartment door is open • LS AIR BTL COMPT DR, the left side air bottle compartment door is open • LS BASKET STEP, the left side basket steps not stowed • STABILIZER CTRL DR, the rear stabilizer control compartment door is open • STABILIZER DEPLOYED, the stabilizers are not stowed. • LS CORD REEL DR, the left side cord reel compartment door is open • RS CORD REEL DR, the right-side cord reel compartment door is open • B1 REAR COMPT DR, the rear B1 compartment door is open • TURNTBL CTRL CNSL, the turntable control console not stowed. • RS BASKET STEP, the right-side basket steps not stowed • RS AIR BTL COMPT DR, the right-side air bottle compartment door is open. • RS1 COMPT DR, the right side RS1 compartment door is open • RS2 COMPT DR, the right side RS2 compartment door is open 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • RS3 COMPT DR, the right side RS3 compartment door is open • RS4 COMPT DR, the right side RS4 compartment door is open • RS5 COMPT DR, the right side RS5 compartment door is open • RS6 COMPT DR, the right side RS6 compartment door is open • RS7 COMPT DR, the right side RS7 compartment door is open • RS CREWCAB DR, the right-side crew cab door is open • RS CAB COMPT DR, the right-side cab compartment door is open • RS CAB DR, the right-side cab door is open • LT TOWER NOT STOWED, the light tower is not stowed <p>Any other device that is opened, extended, or deployed that creates a hazard or is likely to cause major damage to the apparatus if the apparatus is moved shall be displayed as a caution message after the parking brake is released.</p> <p><u>SWITCH PANELS</u></p> <p>The emergency light switch panel shall have a master switch for ease of use plus individual switches for selective control. Each switch panel shall contain up to six (6) rocker-type switches each rated for two hundred thousand (200,000) cycles. Panels with less than six (6) switches shall include indicators or blanks. The switch panel(s) shall be in the "overhead" position above the windshield on the driver side overhead to allow for easy access.</p> <p>The switches shall be rocker-type and include an integral indicator light. For quick, visual indication the switch shall be illuminated whenever the switch is active. A 2-ply scratch resistant laser engraved Gravoply label indicating the use of each switch shall be placed below the switches. The label shall allow light to pass through the letters for improved visibility in low light conditions. Switches and light source are integral to the switch panel assembly.</p> <p><u>WIPER CONTROL</u></p> <p>For simple operation and easy reach, the windshield wiper control shall be an integral part of the directional light lever located on the steering column. The wiper control shall include high and low wiper speed settings, a one (1) speed intermittent wiper control with six (6) second interval and windshield washer switch. The control shall have a return to park provision, which allows the wipers to return to the stored position when the wipers are not in use.</p> <p>The wipers shall cease operation when the parking brake is set.</p> <p><u>HOURLMETER - AERIAL DEVICE</u></p> <p>An hourmeter for the aerial device shall be provided and located within the cab display or instrument panel.</p> <p><u>AERIAL MASTER</u></p> <p>There shall be a master switch for the aerial operating electrical system provided.</p>		

	Bidder Complies	
	Yes	No
<p><u>AERIAL PTO SWITCH</u></p> <p>A PTO switch for the aerial with indicator light shall be provided.</p> <p><u>SPARE CIRCUIT</u></p> <p>There shall be one (1) pair of wires, including a positive and a negative, installed on the apparatus.</p> <p>The above wires shall have the following features:</p> <p>The positive wire shall be connected directly to the battery power.</p> <p>The negative wire shall be connected to ground.</p> <p>Wires shall be protected to 15 amps at 12 volts DC.</p> <p>Power and ground shall terminate Please provide and additional 24 inches of spare wire on the officer side of the engine tunnel cover.</p> <p>Termination shall be with heat shrinkable butt splicing.</p> <p>Wires shall be sized to 125 percent of the protection.</p> <p>This circuit(s) may be load managed when the parking brake is set.</p> <p><u>CUSTOMER SUPPLIED RADIO WIRING</u></p> <p>There shall be one (1) 12-volt combination wiring leads of which each shall include one (1) direct battery, one (1) ignition and one (1) negative for use with radio equipment.</p> <p>Each lead shall be 18.00" long and be provided TBD. The leads shall be clearly marked in a coil and terminate with butt splices.</p> <p>A breaker rated for 30 amps shall be provided for circuit protection of the direct battery lead with a minimum of 10-gauge wire.</p> <p>A breaker rated for 7.5 amps shall be provided for circuit protection of the ignition lead.</p> <p>The wires shall be colored coded as follows:</p> <ul style="list-style-type: none"> • red for direct battery • yellow for ignition • black for ground <p><u>SPARE CIRCUIT</u></p> <p>There shall be two (2) pair of wires, including a positive and a negative, installed on the apparatus.</p> <p>The above wires shall have the following features:</p>		

	Bidder Complies	
	Yes	No
<p>The positive wire shall be connected directly to the battery power.</p> <p>The negative wire shall be connected to ground.</p> <p>Wires shall be protected to 15 amps at 12 volts DC.</p> <p>Power and ground shall terminate Please provide and additional 24 inches of spare wire on center lower back wall of EMS cabinet.</p> <p>Termination shall be with heat shrinkable butt splicing.</p> <p>Wires shall be sized to 125% of the protection.</p> <p>This circuit(s) may be load managed when the parking brake is set.</p> <p><u>SPARE CIRCUIT</u></p> <p>There shall be one (1) pair of wires, including a positive and a negative, installed on the apparatus.</p> <p>The above wires shall have the following features:</p> <ul style="list-style-type: none"> • The positive wire shall be connected directly to the battery power • The negative wire shall be connected to ground • Wires shall be protected to 15 amps at 12 volts DC • Power and ground shall terminate officer side dash area • Termination shall be with 15 amp, power point plug with rubber cover • Wires shall be sized to 125 percent of the protection <p>The circuit(s) may be load managed when the parking brake is set.</p> <p><u>SPARE CIRCUIT</u></p> <p>There shall be one (1) pair of wires, including a positive and a negative, installed on the apparatus.</p> <p>The above wires shall have the following features:</p> <ul style="list-style-type: none"> • The positive wire shall be connected directly to the battery power. • The negative wire shall be connected to ground. • Wires shall be protected to 15 amps at 12 volts DC. • Power and ground shall terminate Upper instrument panel between driver and office for customer installed dash camera. • Termination shall be with heat shrinkable butt splicing. <p>Wires shall be sized to 125% of the protection.</p> <p>This circuit(s) may be load managed when the parking brake is set.</p>		


	Bidder Complies	
	Yes	No
<p><u>SPARE CIRCUIT</u></p> <p>There shall be two (2) pair of wires, including a positive and a negative, installed on the apparatus.</p> <p>The above wires shall have the following features:</p> <p>The positive wire shall be connected directly to the battery power.</p> <p>The negative wire shall be connected to ground.</p> <p>Wires shall be protected to 15 amps at 12 volts DC.</p> <p>Power and ground shall terminate Please provide and additional 24 inches of spare wire on LS and RS upper back wall of EMS cabinet in crew cab..</p> <p>Termination shall be with heat shrinkable butt splicing.</p> <p>Wires shall be sized to 125% of the protection.</p> <p>This circuit(s) may be load managed when the parking brake is set.</p> <p><u>INFORMATION CENTER</u></p> <p>An information center employing a 7.00" diagonal touch screen color LCD display shall be encased in an ABS plastic housing.</p> <p>The information center shall have the following specifications:</p> <ul style="list-style-type: none"> • Operate in temperatures from -40 to 185 degrees Fahrenheit • An Optical Gel shall be placed between the LCD and protective lens • Five weather resistant user interface switches • Grey with black accents • Sunlight Readable • Linux operating system • Minimum of 1000nits rated display • Display can be changed to an available foreign language • A LCD display integral to the cab gauge panel shall be included as outlined in the cab instrumentation area. • Programmed to read US Customary <p><u>General Screen Design</u></p> <p>Where possible, background colors shall be used to provide "At a Glance" vehicle information. If information provided on a screen is within acceptable limits, a green background shall be used.</p> <p>If a caution or warning situation arises the following shall occur:</p>		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • An amber background/text color shall indicate a caution condition • A red background/text color shall indicate a warning condition • The information center shall utilize an "Alert Center" to display text messages for audible alarm tones. The text messages shall be written to identify the item(s) causing the audible alarm to sound. If more than one (1) text message occurs, the messages shall cycle every second until the problem(s) have been resolved. The background color for the "Alert Center" shall change to indicate the severity of the "warning" message. If a warning and a caution condition occur simultaneously, the red background color shall be shown for all alert center messages. • A label for each button shall exist. The label shall indicate the function for each active button for each screen. Buttons that are not utilized on specific screens shall have a button label with no text or symbol. <p><u>Home/Transit Screen</u></p> <p>This screen shall display the following:</p> <ul style="list-style-type: none"> • Vehicle Mitigation (if equipped) • Water Level (if the water level system includes compatible communications to the information center) • Foam Level (if the foam level system includes compatible communications to the information center) • Seat Belt Monitoring Screen • Tire Pressure Monitoring (if equipped) • Digital Speedometer • Active Alarms <p><u>On Scene Screen</u></p> <p>This screen shall display the following and shall be auto activated with pump engaged (if equipped):</p> <ul style="list-style-type: none"> • Battery Voltage • Fuel • Oil Pressure • Coolant Temperature • RPM • Water Level (if equipped) • Foam Level (if equipped) • Foam Concentration (if equipped) • Water Flow Rate (if equipped) • Water Used (if equipped) • Active Alarms 		

	Bidder Complies	
	Yes	No
<p><u>Virtual Buttons</u></p> <p>There shall be four (4) virtual switch panel screens that match the overhead and lower lighting and HVAC switch panels.</p> <p><u>Page Screen</u></p> <p>The page screen shall display the following and allow the user to progress into other screens for further functionality:</p> <ul style="list-style-type: none"> • Diagnostics <ul style="list-style-type: none"> ○ Faults <ul style="list-style-type: none"> ▪ Listed by order of occurrence ▪ Allows to sort by system ○ Interlock <ul style="list-style-type: none"> ▪ Throttle Interlocks ▪ Pump Interlocks (if equipped) ▪ Aerial Interlocks (if equipped) ▪ PTO Interlocks (if equipped) ○ Load Manager <ul style="list-style-type: none"> ▪ A list of items to be load managed shall be provided. The list shall provide a description of the load. ▪ The lower the priority numbers the earlier the device shall be shed should a low voltage condition occur. ▪ The screen shall indicate if a load has been shed (disabled) or not shed. ▪ "At a glance" color features are utilized on this screen. ○ Systems <ul style="list-style-type: none"> ▪ Command Zone <ul style="list-style-type: none"> • Module type and ID number • Module Version • Input or output number • Circuit number connected to that input or output • Status of the input or output • Power and Constant Current module diagnostic information ▪ Foam (if equipped) ▪ Pressure Controller (if equipped) ▪ Generator Frequency (if equipped) ○ Live Data <ul style="list-style-type: none"> ▪ General Truck Data • Maintenance <ul style="list-style-type: none"> ○ Engine oil and filter ○ Transmission oil and filter ○ Pump oil (if equipped) ○ Foam (if equipped) ○ Aerial (if equipped) 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Setup <ul style="list-style-type: none"> ○ Clock Setup ○ Date & Time <ul style="list-style-type: none"> ▪ 12 or 24 hour format ▪ Set time and date ○ Backlight <ul style="list-style-type: none"> ▪ Daytime ▪ Night time ▪ Sensitivity ○ Unit Selection ○ Home Screen ○ Virtual Button Setup ○ On Scene Screen Setup ○ Configure Video Mode <ul style="list-style-type: none"> ▪ Set Video Contrast ▪ Set Video Color ▪ Set Video Tint • Do Not Move <ul style="list-style-type: none"> ○ The screen shall indicate the approximate location and type of item that is open or is not stowed for travel. The actual status of the following devices shall be indicated <ul style="list-style-type: none"> ▪ Driver Side Cab Door ▪ Passenger's Side Cab Door ▪ Driver Side Crew Cab Door ▪ Passenger's Side Crew Cab Door ▪ Driver Side Body Doors ▪ Passenger's Side Body Doors ▪ Rear Body Door(s) ▪ Ladder Rack (if applicable) ▪ Deck Gun (if applicable) ▪ Light Tower (if applicable) ▪ Hatch Door (if applicable) ▪ Stabilizers (if applicable) ▪ Steps (if applicable) • Notifications <ul style="list-style-type: none"> ○ View Active Alarms <ul style="list-style-type: none"> ▪ Shows a list of all active alarms including date and time of the occurrence is shown with each alarm ▪ Silence Alarms - All alarms are silenced • Timer Screen • HVAC (if equipped) • Tire Information (if equipped) 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Ascendant Set Up Confirmation (if equipped) <p>Button functions and button labels may change with each screen.</p> <p><u>COLLISION MITIGATION</u></p> <p>There shall be a HAAS Alert®, Model HA5 Responder-to-Vehicle (R2V) collision avoidance system provided on the apparatus. The HA5 cellular transponder module shall be installed behind the cab windshield, as high and near to the center as practical, to allow clear visibility to the sky. The module dimensions are 5.40" long x 2.70" wide x 1.30" high, and operating temperature range is -40 degree C to 85-degree C.</p> <p>The transponder shall be connected to the vehicle's emergency master circuit and battery direct power and ground.</p> <p>While responding with emergency lights on, the HA5 transponder sends alert messages via cellular network to motorists in the vicinity of the responding truck that are equipped with the WAZE app.</p> <p>While on scene with emergency lights on, the HA5 transponder sends road hazard alerts to motorists in the vicinity of the truck that are equipped with the WAZE app.</p> <p>The HA5 Responder-to-Vehicle (R2V) collision avoidance system shall include the transponder and a 5-year cellular plan subscription.</p> <p>Activation of the HAAS Alert system requires a representative of the customer to accept the End User License Agreement (EULA) via an on-line portal.</p> <p><u>VEHICLE DATA RECORDER</u></p> <p>There shall be a vehicle data recorder (VDR) capable of reading and storing vehicle information provided.</p> <p>The information stored on the VDR can be downloaded through a USB port mounted in a convenient location determined by cab model. A USB cable can be used to connect the VDR to a laptop to retrieve required information. The program to download the information from the VDR will be available to download on-line.</p> <p>The vehicle data recorder shall be capable of recording the following data via hardwired and/or CAN inputs:</p> <ul style="list-style-type: none"> • Vehicle Speed - MPH • Acceleration - MPH/sec • Deceleration - MPH/sec • Engine Speed - RPM • Engine Throttle Position - % of Full Throttle • ABS Event - On/Off 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Seat Occupied Status - Yes/No by Position • Seat Belt Buckled Status - Yes/No by Position • Master Optical Warning Device Switch - On/Off • Time - 24 Hour Time • Date - Year/Month/Day <p><u>Seat Belt Monitoring System</u></p> <p>A seat belt monitoring system (SBMS) shall be provided on the color display and in the center overhead of the cab instrument panel. The SBMS shall be capable of monitoring up to 10 seating positions indicating the status of each seat position per the following:</p> <ul style="list-style-type: none"> • Seat Occupied & Buckled = Green LED indicator illuminated • Seat Occupied & Unbuckled = Red LED indicator with audible alarm • No Occupant & Buckled = Red LED indicator with audible alarm • No Occupant & Unbuckled = No indicator and no alarm <p>The seat belt monitoring screen shall become active on the color display when:</p> <ul style="list-style-type: none"> • The home screen is active: <ul style="list-style-type: none"> ○ and there is any occupant seated but not buckled or any belt buckled with an occupant. ○ and there are no other Do Not Move Apparatus conditions present. As soon as all Do Not Move Apparatus conditions are cleared, the SBMS shall be activated. <p>The SBMS shall include an audible alarm that shall warn that an unbuckled occupant condition exists, and the parking brake is released, or the transmission is not in park.</p> <p><u>BRACKET, JOHNNY RAY</u></p> <p>A Johnny Ray, Model JR-207, radio swivel bracket rated for 14 lbs. shall be provided and installed TBD.</p> <p><u>RADIO ANTENNA MOUNT</u></p> <p>There shall be one (1) standard 1.125", 18 thread antenna-mounting base(s) installed on the right side on the cab roof with high efficiency, low loss, coaxial cable(s) routed to the instrument panel area. A weatherproof cap shall be installed on the mount.</p>  <p><u>VEHICLE CAMERA SYSTEM</u></p> <p>There shall be a color vehicle camera system provided with the following:</p> <ul style="list-style-type: none"> • One (1) camera located at the rear of the apparatus, pointing rearward, displayed automatically with the vehicle in reverse. • One (1) camera located on the right side of the apparatus, pointing rearward, displayed automatically with the right-side turn signal. 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> One (1) camera located on the left side of the apparatus, pointing rearward, displayed automatically with the left side turn signal. <p>The camera images shall be displayed on the driver's vehicle information center display. Audio from the microphone on the rear camera shall be not provided.</p> <p>The following components shall be included:</p> <ul style="list-style-type: none"> One (1) SV-CW134639CAI Camera Two (2) CS134404CI Side cameras One (1) Amplified speaker (if applicable) All necessary cables <p><u>VEHICLE CAMERA GUARD</u></p> <p>There shall be one (1) aluminum treadplate guard(s) fastened over the vehicle camera(s) located Centered on top of body .</p> <p><u>ELECTRICAL POWER CONTROL SYSTEM</u></p> <p>The primary power distribution shall be located forward of the officer's seating position and be easily accessible while standing on the ground for simplified maintenance and troubleshooting. Additional electrical distribution centers shall be provided throughout the vehicle to house the vehicle's electrical power, circuit protection, and control components. The electrical distribution centers shall be located strategically throughout the vehicle to minimize wire length. For ease of maintenance, all electrical distribution centers shall be easily accessible. All distribution centers containing fuses, circuit breakers and/or relays shall be easily accessible.</p> <p>Distribution centers located throughout the vehicle shall contain battery powered studs for supplying customer installed equipment thus providing a lower cost of ownership.</p> <p>Circuit protection devices, which conform to SAE standards, shall be utilized to protect electrical circuits. All circuit protection devices shall be rated per NFPA requirements to prevent wire and component damage when subjected to extreme current overload. General protection circuit breakers shall be Type-I automatic reset (continuously resetting). When required, automotive type fuses shall be utilized to protect electronic equipment. Control relays and solenoid shall have a direct current rating of 125 percent of the maximum current for which the circuit is protected per NFPA.</p> <p><u>Solid-State Control System</u></p> <p>A solid-state electronics-based control system shall be utilized to achieve advanced operation and control of the vehicle components. A fully computerized vehicle network shall consist of electronic modules located near their point of use to reduce harness lengths and improve reliability. The control system shall comply with SAE J1939-11 recommended practices.</p> <p>The control system shall operate as a master-slave system whereas the main control module instructs all other system components. The system shall contain patented Mission Critical</p>		

	Bidder Complies	
	Yes	No
<p>software that maintains critical vehicle operations in the unlikely event of a main controller error. The system shall utilize a Real Time Operating System (RTOS) fully compliant with OSEK/VDX™ specifications providing a lower cost of ownership.</p> <p>For increased reliability and simplified use, the control system modules shall include the following attributes:</p> <ul style="list-style-type: none"> • Green LED indicator light for module power • Red LED indicator light for network communication stability status • Control system self test at activation and continually throughout vehicle operation • No moving parts due to transistor logic • Software logic control for NFPA mandated safety interlocks and indicators • Integrated electrical system load management without additional components • Integrated electrical load sequencing system without additional components • Customized control software to the vehicle's configuration • Factory and field re programmable to accommodate changes to the vehicle's operating parameters • Complete operating and troubleshooting manuals • USB connection to the main control module for advanced troubleshooting <p>To assure long life and operation in a broad range of environmental conditions, the solid-state control system modules shall meet the following specifications:</p> <ul style="list-style-type: none"> • Module circuit board shall meet SAE J771 specifications • Operating temperature from -40C to +70C • Storage temperature from -40C to +70C • Vibration to 50g <p>IP67 rated enclosure (Totally protected against dust and protected against the effect of temporary immersion between 15 centimeters and one (1) meter)</p> <p>Operating voltage from eight (8) volts to 16 volts DC</p> <p>The main controller shall activate status indicators and audible alarms designed to provide warning of problems before they become critical.</p> <p><u>Circuit Protection and Control Diagram</u></p> <p>Copies of all job-specific, computer network input and output (I/O) connections shall be provided with each chassis. The sheets shall indicate the function of each module connection point, circuit protection information (where applicable), wire numbers, wire colors and load management information.</p> <p><u>On-Board Advanced/Visual Electrical System Diagnostics</u></p> <p>The on-board information center shall include the following diagnostic information:</p>		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Text description of active warning or caution alarms • Simplified warning indicators • Amber caution indication with intermittent alarm • Red warning indication with steady tone alarm <p>All control system modules, except for the main control module, shall contain on-board visual diagnostic LEDs that assist in troubleshooting. The LEDs shall be enclosed within the sealed, transparent module housing near the face of the module. One LED for each input or output shall be provided and shall illuminate whenever the respective input or output is active. Color-coded labels within the modules shall encompass the LEDs for ease of identification. The LED indicator lights shall provide point of use information for reduced troubleshooting time without the need for an additional computer.</p> <p><u>Tech Module with WiFi</u></p> <p>An in-cab module will provide WiFi wireless interface and data logging capability (no exception). The WiFi interface will comply with IEEE 802.11 b/g/n capabilities while communicating at 2.4 Gigahertz. The module will provide an external antenna connection allowing a line of site communication range of up to 300 feet with a roof mounted antenna.</p> <p>The module will transmit a password protected web page to a WiFi enabled device (i.e. most smart phones, tablets, or laptops) allowing two levels of user interaction. The firefighter level will allow vehicle monitoring of the vehicle and firefighting systems on the apparatus. The technician level will allow diagnostic access to inputs and outputs installed on the Command Zone™, control and information system.</p> <p>The data logging capability will record faults from the engine, transmission, ABS and Command Zone™, control and information systems as they occur. No other data will be recorded at the time the fault occurs. The data logger will provide up to 2 Gigabytes of data storage.</p> <p>A USB connection will be provided on the Tech Module. It will provide a means to download data logger information and update software in the device.</p> <p><u>Prognostics</u></p> <p>A software-based vehicle tool shall be provided to predict remaining life of the vehicles critical fluid and events (no exception).</p> <p>The system shall send automatic indications to the Command Zone, color display and/or wireless enabled device to proactively alert of upcoming service intervals.</p> <p>Prognostics shall include:</p> <ul style="list-style-type: none"> • Engine oil and filter • Transmission oil and filter • Pump oil (if equipped) • Foam oil (if equipped) 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Aerial oil and filter (if equipped) <p><u>Advanced Diagnostics</u> An advanced, Windows-based, diagnostic software program shall be provided for this control system. The software shall provide troubleshooting tools to service technicians equipped with a Windows-based computer or wireless enabled device.</p> <p>The service and maintenance software shall be easy to understand and use and have the ability to view system input/output (I/O) information.</p> <p><u>Indicator Light and Alarm Prove-Out System</u> A system shall be provided which automatically tests basic indicator lights and alarms located on the cab instrument panel.</p> <p><u>Voltage Monitor System</u> A voltage monitoring system shall be provided to indicate the status of the battery system connected to the vehicle's electrical load. The system shall provide visual and audible warning when the system voltage is below or above optimum levels.</p> <p>The alarm shall activate if the system falls below 11.8 volts DC for more than two (2) minutes.</p> <p><u>Dedicated Radio Equipment Connection Points</u> There shall be three (3) studs provided in the primary power distribution center located in front of the officer for two-way radio equipment.</p> <ul style="list-style-type: none"> • The studs shall consist of the following: • 12-volt 40-amp battery switched power • 12-volt 60-amp ignition switched power • 12-volt 60-amp direct battery power <p>There shall also be a 12-volt 100-amp ground stud located in or adjacent to the power distribution center.</p> <p><u>Enhanced Software</u> The solid-state control system shall include the following software enhancements:</p> <p>All perimeter lights and scene lights (where applicable) shall be deactivated when the parking brake is released.</p> <p>Cab and crew cab dome lights shall remain on for 10 seconds for improved visibility after the doors close. The dome lights shall dim after 10 seconds or immediately if the vehicle is put into gear.</p> <p>Cab and crew cab perimeter lights shall remain on for 10 seconds for improved visibility after the doors close. The dome lights shall dim after 10 seconds or immediately if the vehicle is put into gear.</p>		

	Bidder Complies	
	Yes	No
<p><u>EMI/RFI Protection</u></p> <p>To prevent erroneous signals from crosstalk contamination and interference, the electrical system shall meet, at a minimum, SAE J551/2, thus reducing undesired electromagnetic and radio frequency emissions. An advanced electrical system shall be used to ensure radiated and conducted electromagnetic interference (EMI) or radio frequency interference (RFI) emissions are suppressed at their source.</p> <p>The apparatus shall have the ability to operate in the electromagnetic environment typically found in fire ground operations to ensure clean operations. The electrical system shall meet, without exceptions, electromagnetic susceptibility conforming to SAE J1113/25 Region 1, Class C EMR for 10KHz-1GHz to 100 Volts/Meter. The vehicle OEM, upon request, shall provide EMC testing reports from testing conducted on an entire apparatus and shall certify that the vehicle meets SAE J551/2 and SAE J1113/25 Region 1, Class C EMR for 10KHz-1GHz to 100 Volts/Meter requirements. Component and partial (incomplete) vehicle testing is not adequate as overall vehicle design can impact test results and thus is not acceptable by itself.</p> <p>EMI/RFI susceptibility shall be controlled by applying appropriate circuit designs and shielding. The electrical system shall be designed for full compatibility with low-level control signals and high-powered two-way radio communication systems. Harness and cable routing shall be given careful attention to minimize the potential for conducting and radiated EMI/RFI susceptibility.</p> <p><u>ELECTRICAL</u></p> <p>All 12-volt electrical equipment installed by the apparatus manufacturer shall conform to modern automotive practices. All wiring shall be high temperature crosslink type. Wiring shall be run, in loom or conduit, where exposed and have grommets where wire passes through sheet metal. Automatic reset circuit breakers shall be provided which conform to SAE Standards. Wiring shall be color, function, and number coded. Function and number codes shall be continuously imprinted on all wiring harness conductors at 2.00" intervals. Exterior exposed wire connectors shall be positive locking, and environmentally sealed to withstand elements such as temperature extremes, moisture, and automotive fluids.</p> <p>Electrical wiring and equipment shall be installed utilizing the following guidelines:</p> <ol style="list-style-type: none"> 1. All holes made in the roof shall be caulked with silicon, rope caulk is not acceptable. Large fender washers, liberally caulked, shall be used when fastening equipment to the underside of the cab roof. 2. Any electrical component that is installed in an exposed area shall be mounted in a manner that shall not allow moisture to accumulate in it. Exposed area shall be defined as any location outside of the cab or body. 3. Electrical components designed to be removed for maintenance shall not be fastened with nuts and bolts. Metal screws shall be used in mounting these devices. Also, a coil of wire shall be provided behind the appliance to allow them to be pulled away from mounting area for inspection and service work. 		

	Bidder Complies	
	Yes	No
<p>4. Corrosion preventative compound shall be applied to all terminal plugs located outside of the cab or body. All non-waterproof connections shall require this compound in the plug to prevent corrosion and for easy separation (of the plug).</p> <p>5. All lights that have their sockets in a weather exposed area shall have corrosion preventative compound added to the socket terminal area.</p> <p>6. All electrical terminals in exposed areas shall have silicon (1890) applied completely over the metal portion of the terminal.</p> <p>All lights and reflectors, required to comply with Federal Motor Vehicle Safety Standard #108, shall be furnished. Rear identification lights shall be recessed mounted for protection. Lights and wiring mounted in the rear bulkheads shall be protected from damage by installing a false bulkhead inside the rear compartments.</p> <p>An operational test shall be conducted to ensure that any equipment that is permanently attached to the electrical system is properly connected and in working order.</p> <p>The results of the tests shall be recorded and provided to the purchaser at time of delivery.</p> <p><u>BATTERY SYSTEM</u></p> <p>There shall be six (6) 12-volt Exide®, Model 31S950X3W, batteries that include the following features shall be provided:</p> <ul style="list-style-type: none"> • 950 CCA, cold cranking amps • 190-amp reserve capacity • High cycle • Group 31 • Rating of 5700 CCA at 0 degrees Fahrenheit • -190 minutes of reserve capacity • Threaded stainless steel studs <p>Each battery case shall be a black polypropylene material with a vertically ribbed container for increased vibration resistance. The cover shall be manifold vented with a central venting location to allow a 45-degree tilt capacity.</p> <p>The inside of each battery shall consist of a "maintenance free" grid construction with poly wrapped separators and a flooded epoxy bottom anchoring for maximum vibration resistance.</p> <p><u>BATTERY SYSTEM</u></p> <p>There shall be a single starting system with an ignition switch and starter button provided and located on the cab instrument panel.</p> <p><u>MASTER BATTERY SWITCH</u></p> <p>There shall be a master battery switch provided within the cab within easy reach of the driver to activate the battery system.</p>		

	Bidder Complies	
	Yes	No
<p>An indicator light shall be provided on the instrument panel to notify the driver of the status of the battery system.</p> <p><u>BATTERY COMPARTMENTS</u></p> <p>The batteries shall be stored in well-ventilated compartments that are located under the cab and bolted directly to the chassis frame. The battery compartments shall be constructed of painted stainless steel and be designed to accommodate a maximum of three (3) group 31 batteries in each compartment. The compartments shall include formed fit heavy-duty roto-molded polyethylene battery tray inserts with drains on each side of the frame rails. The batteries shall be mounted inside of the roto-molded trays.</p> <p><u>JUMPER STUDS</u></p> <p>One (1) set of battery jumper studs with plastic color-coded covers shall be installed on the battery box on the driver's side. This shall allow enough room for easy jumper cable access.</p> <p><u>BATTERY CHARGER/ AIR COMPRESSOR</u></p> <p>There shall be a Kussmaul™ Pump Plus 1200, Model # 52-21-1100, single output battery charger/air compressor system shall be provided. A display bar graph indicating the state of charge shall be included.</p> <p>The automatic charger shall maintain one (1) set of batteries with a maximum output current of 40 amps.</p> <p>The 12-volt air compressor shall be installed to maintain the air system pressure when the vehicle is not in use.</p> <p>There shall be an auto pump timer installed between the pressure switch and the pump that shall allow the pump to run for one hour than shut down for one hour.</p> <p>The battery charger shall be wired to the AC shoreline inlet through an AC receptacle adjacent to this battery charger.</p> <p>Battery charger/compressor shall be located behind the driver's seat.</p> <p>The battery charger indicator shall be located behind the driver's door on the outside of the cab.</p> <p><u>SHORELINE INLET</u></p> <p>There shall be one (1) Blue Sea Sure Eject™ part number 7851, 20-amp 120 volt AC shoreline inlet provided to operate the dedicated 120 volt AC circuits on the apparatus.</p> <p>The shoreline shall be connected to Battery charger and any outlets.</p> <p>The shoreline inlet cover color to be red.</p> <p>The connector body shall be released from the inlet when the apparatus engine start button is activated.</p>		

	Bidder Complies	
	Yes	No
<p>There shall be a mating connector body supplied with the loose equipment.</p> <p>There shall be a label installed near the inlet that state the following:</p> <ul style="list-style-type: none"> • Line Voltage • Current Rating (amps) • Phase • Frequency <p>The shoreline receptacle shall be located on the driver side of cab, above wheel.</p> <p><u>JUMPER STUDS</u></p> <p>One (1) set of battery jumper studs with plastic color-coded covers shall be located at the drivers side cab step area. A tag shall be provided for positive/negative terminals.</p> <p><u>ALTERNATOR</u></p> <p>A Delco Remy®, Model 55SI, alternator shall be provided. It shall have a rated output current of 430 amps, as measured by SAE method J56. The alternator shall feature an integral regulator and rectifier system that has been tested and qualified to an ambient temperature of 257 degrees Fahrenheit (125 degrees Celsius). The alternator shall be connected to the power and ground distribution system with heavy-duty cables sized to carry the full rated alternator output.</p> <p><u>ELECTRONIC LOAD MANAGER</u></p> <p>An electronic load management (ELM) system shall be provided that monitors the vehicles 12-volt electrical system, automatically reducing the electrical load in the event of a low voltage condition, and automatically restoring the shed electrical loads when a low voltage condition expires. This ensures the integrity of the electrical system.</p> <p>For improved reliability and ease of use, the load manager system shall be an integral part of the vehicle's solid-state control system requiring no additional components to perform load management tasks. Load management systems which require additional components shall not be allowed.</p> <p>The system shall include the following features:</p> <ul style="list-style-type: none"> • System voltage monitoring. • A shed load shall remain inactive for a minimum of five minutes to prevent the load from cycling on and off. • Sixteen available electronic load shedding levels. • Priority levels can be set for individual outputs. • High Idle to activate before any electric loads are shed and deactivate with the service brake. <ul style="list-style-type: none"> ○ If enabled: <ul style="list-style-type: none"> ▪ "Load Man Hi-Idle On" shall display on the information center. ▪ Hi-Idle shall not activate until 30 seconds after engine start up. 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Individual switch "on" indicator to flash when the particular load has been shed. • The information center indicates system voltage. <p>The information center, where applicable, includes a "Load Manager" screen indicating the following:</p> <ul style="list-style-type: none"> • Load managed items list, with priority levels and item condition. • Individual load managed item condition: <ul style="list-style-type: none"> ○ ON = not shed ○ SHED = shed <p><u>SEQUENCER</u></p> <p>A sequencer shall be provided that automatically activates and deactivates vehicle loads in a preset sequence thereby protecting the alternator from power surges. This sequencer operation shall allow a gradual increase or decrease in alternator output, rather than loading or dumping the entire 12-volt load to prolong the life of the alternator.</p> <p>For improved reliability and ease of use, the load sequencing system shall be an integral part of the vehicle's solid-state control system requiring no additional components to perform load sequencing tasks. Load sequencing systems which require additional components shall not be allowed.</p> <p>Emergency light sequencing shall operate in conjunction with the emergency master light switch. When the emergency master switch is activated, the emergency lights shall be activated one by one at half-second intervals. Sequenced emergency light switch indicators shall flash while waiting for activation.</p> <p>When the emergency master switch is deactivated, the sequencer shall deactivate the warning light loads in the reverse order.</p> <p>Sequencing of the following items shall also occur, in conjunction with the ignition switch, at half-second intervals:</p> <ul style="list-style-type: none"> • Cab Heater and Air Conditioning • Crew Cab Heater (if applicable) • Crew Cab Air Conditioning (if applicable) • Exhaust Fans (if applicable) • Third Evaporator (if applicable) <p><u>HEADLIGHTS</u></p> <p>There shall be a HiViz part number FT-4X6-4KIT, that includes four (4) 4.00" high x 6.00" long rectangular LED lights with parking lamp illumination around the outside of the lamps mounted in the front quad style, chrome housing on each side of the cab grille:</p>		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> the outside lamp on each side shall contain a part number FT-4X6-HL with low beam LEDs the inside lamp on each side shall contain a part number FT-4X6-H with high beam LEDs the lights shall be controlled through the headlight switch <p><u>DIRECTIONAL LIGHTS</u></p> <p>There shall be two (2) Whelen® 600 series, LED combination directional/marker lights provided. The lights shall be located on the outside cab corners, next to the headlights.</p> <p>The color of the lenses shall be the same color as the LED's.</p> <p><u>INTERMEDIATE LIGHT</u></p> <p>There shall be two (2) Weldon, Model 9186-8580-29, amber LED turn signal marker lights furnished, one (1) each side, in the rear fender panel. The light shall double as a turn signal and marker light.</p> <p><u>CAB CLEARANCE/MARKER/ID LIGHTS</u></p> <p>There shall be seven (7) amber LED lights provided to indicate the presence and overall width of the vehicle in the following locations:</p> <ul style="list-style-type: none"> Three (3) amber LED identification lights shall be installed in the center of the cab above the windshield. Two (2) amber LED clearance lights shall be installed, one (1) on each outboard side of the cab above the windshield. Two (2) amber LED marker lights shall be installed, one (1) on each side above the cab doors. <p><u>REAR CLEARANCE/MARKER/ID LIGHTING</u></p> <p>There shall be three (3) LED identification lights located at the rear of the apparatus installed per the following:</p> <ul style="list-style-type: none"> As close as practical to the vertical centerline and one (1) on each outside edge Centers spaced not less than 6.00" or more than 12.00" apart Red in color All at the same height All visible from the rear <p>There shall be two (2) LED lights installed at the rear of the apparatus used as clearance lights located at the rear of the apparatus per the following:</p> <ul style="list-style-type: none"> To indicate the overall width of the vehicle One (1) each side of the vertical centerline As near the top as practical 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Red in color • To be visible from the rear • All at the same height <p>There shall be two (2) LED lights installed on the side of the apparatus used as marker lights as close to the rear as practical per the following:</p> <ul style="list-style-type: none"> • To indicate the overall length of the vehicle • One (1) each side of the vertical centerline • As near the top as practical • Red in color • To be visible from the side • All at the same height <p>There shall be two (2) red reflectors located on the rear of the truck facing to the rear. One (1) each side, as far to the outside as practical, at a minimum of 15.00", but no more than 60.00", above the ground.</p> <p>There shall be two (2) red reflectors located on the side of the truck facing to the side. One (1) each side, as far to the rear as practical, at a minimum of 15.00", but no more than 60.00", above the ground.</p> <p>Per FMVSS 108 and CMVSS 108 requirements.</p> <p><u>MARKER LIGHTS</u></p> <p>There shall be one (1) pair of amber and red LED marker lights with rubber arm, located at the rear lower corner of the body. The amber lens shall face the front and the red lens shall face the rear of the truck.</p> <p>These lights shall be activated with the running lights of the vehicle.</p> <p><u>REAR FMVSS LIGHTING</u></p> <p>The rear stop/tail and directional LED lighting shall consist of the following:</p> <ul style="list-style-type: none"> • Two (2) Whelen®, Model M6BTT, red LED stop/taillights • Two (2) Whelen, Model M6T, amber LED arrow turn lights <p>The lights shall be provided with color lenses.</p> <p>The lights shall be mounted in a polished combination housing.</p> <p>There shall be two (2) Whelen Model M6BUW, LED backup lights provided in the taillight housing.</p> <p><u>LICENSE PLATE BRACKET</u></p> <p>There shall be one (1) license plate bracket mounted on the rear of the body.</p>		

	Bidder Complies	
	Yes	No
<p>A white LED light shall illuminate the license plate. A stainless-steel light shield shall be provided over the light that shall direct illumination downward, preventing white light to the rear.</p> <p><u>LIGHTING BEZEL</u></p> <p>There shall be two (2) Whelen, Model M6FCV4P, four (4) place chromed ABS housings with manufacturer's logo provided for the rear M6 series stop/tail, directional, back up, scene lights or warning lights.</p> <p><u>BACK-UP ALARM</u></p> <p>A PRECO, Model 1040, solid-state electronic audible back-up alarm that actuates when the truck is shifted into reverse shall be provided. The device shall sound at 60 pulses per minute and automatically adjust its volume to maintain a minimum ten (10) dBA above surrounding environmental noise levels.</p> <p><u>SYNCHRONIZE WARNING LIGHTS</u></p> <p>The sync wires to the following two (2) lights located front warning zone on the apparatus shall be connected to maintain the flash patterns of the lights.</p> <p>The lights located LS inboard and RS outboard shall remain on phase 1 or flash together.</p> <p>The lights located LS outboard and RS inboard shall be changed to phase 2 or flash opposite the lights selected above.</p> <p><u>CAB PERIMETER SCENE LIGHTS</u></p> <p>There shall be four (4) Amdor, Model AY-LB-12HW012, 190 lumens each, 12.00" white LED strip lights provided.</p> <ul style="list-style-type: none"> • One (1) under the driver's side cab access step. • One (1) under the passenger's side cab access step. • One (1) under the passenger's side crew cab access step. • One (1) under the driver's side crew cab access step. <p>The lights shall be activated when the battery switch is on and the respective door is open and whenever control has been selected for the body perimeter lights.</p> <p><u>PUMP HOUSE PERIMETER LIGHTS</u></p> <p>There shall be one (1) Amdor, Model AY-LB-12HW012, 190 lumens each, 12.00" LED weatherproof strip lights with brackets provided under the passenger's side pump panel running boards.</p> <p>The light shall be activated when the battery switch is on and controlled by the same means as the body perimeter lights.</p> <p><u>BODY PERIMETER SCENE LIGHTS</u></p> <p>There shall be three (3) Amdor®, Model AY-LB-12HW012, 190 lumens, 12.00" long, white 12 volt DC LED strip lights provided.</p>		

	Bidder Complies	
	Yes	No
<p>The lights shall be mounted in the following locations.</p> <ul style="list-style-type: none"> • One (1) light shall be provided under the left side turntable access steps • One (1) light shall be provided under the left side basket access steps • One (1) light shall be provided under the right side basket access steps <p>The perimeter scene lights shall be activated when the parking brake is applied.</p> <p><u>ADDITIONAL PERIMETER LIGHTS</u></p> <p>There shall be four (4) lights Amdor®, Model AY-LB-12HW012, 190 lumens each, 12.00" white LED perimeter light(s) provided one (1) light under compartment D1, one (1) light under compartment P1, one (1) light under compartment D4 and one (1) light under compartment P4.</p> <p>These lights shall be activated the same as the body perimeter lights.</p> <p><u>STEP ILLUMINATION</u></p> <p>The running board(s) under the pump panel(s) shall be illuminated by the lights included in the overhead pump panel light shield.</p> <p>Additional steps on the apparatus shall be illuminated per the current edition of NFPA 1901.</p> <p><u>12 VOLT LIGHTING</u></p> <p>There shall be one (1) HiViz, part number FT-MB-24-TRGWA-*--**, 2.56" high x 31.11" long x 3.31" deep 8,880 lumens 12 volt DC LED light(s) installed with TRGWA adjustable tilt mounts located RS forward body compartment top. The lights shall be supplied with a combination of flood and spot optics.</p> <p>The painted parts to be white.</p> <p>The light(s) selected above shall be controlled by a switch at the driver's side switch panel, by a switch at the passenger's side switch panel and by a switch in a recessed cup located at the passenger's side rear bulkhead.</p> <p>These light(s) may be load managed when the parking brake is applied.</p> <p><u>12 VOLT LIGHTING</u></p> <p>There shall be one (1) HiViz, part number FT-MB-24-TRGWA-*--**, 2.56" high x 31.11" long x 3.31" deep 8,880 lumens 12 volt DC LED light(s) installed with TRGWA adjustable tilt mounts located LS forward body compartment top. The lights shall be supplied with a combination of flood and spot optics.</p> <p>The painted parts to be white.</p> <p>The light(s) selected above shall be controlled by a switch at the driver's side switch panel, by a switch at the passenger's side switch panel and by a switch in a recessed cup located at the driver's side rear bulkhead.</p>		

	Bidder Complies	
	Yes	No
<p>These light(s) may be load managed when the parking brake is applied.</p> <p><u>12 VOLT LIGHTING</u></p> <p>There shall be a HiViz Model FT-B-X-72-*-* , 2.56" high x 72.00" long x 3.31" deep 21,251.57 effective lumens 12-volt DC LED light provided on the front cab roof as far forward as practical. The light shall include white scene LEDs. The white LEDs shall be configured with a combination of flood and spot optics.</p> <p>The painted parts of the light housing and brackets to be white.</p> <p>The scene LEDs shall be activated by a switch at the driver's side switch panel, by a switch at the driver's side pump panel and by a switch at the passenger's side switch panel.</p> <p>The white LEDs may be load managed when the parking brake is applied.</p> <p><u>12 VOLT LIGHTING</u></p> <p>There shall be one (1) HiViz Model FT-MB-2.15-*-* , 2.75" high x 17.50" long x 3.31" deep, 9,488 effective lumens 12 volt DC light(s) with a combination of flood and spot optics and adjustable mounting brackets installed on the cab LS over crew cab door under warning light..</p> <p>The painted parts of the light housing and brackets to be white.</p> <p>The light(s) shall be activated by a switch at the driver's side switch panel, by a switch at the passenger's side switch panel and when the cab or crew cab doors on the driver's side are open.</p> <p>The light(s) may be load managed when the parking brake is applied.</p> <p><u>12 VOLT LIGHTING</u></p> <p>There shall be one (1) HiViz Model FT-MB-2.15-*-* , 2.75" high x 17.50" long x 3.31" deep, 9,488 effective lumens 12 volt DC light(s) with a combination of flood and spot optics and adjustable mounting brackets installed on the cab RS over crew cab door under warning light..</p> <p>The painted parts of the light housing and brackets to be white.</p> <p>The light(s) shall be activated by a switch at the driver's side switch panel, by a switch at the passenger's side switch panel and when the cab or crew cab doors on the passenger's side are open.</p> <p>The light(s) may be load managed when the parking brake is applied.</p> <p><u>HOSE BED LIGHTS</u></p> <p>There shall be white 12-volt DC LED light strips with stainless steel protective covers provided to light the hose bed area. Hose bed lights shall meet the photometric levels listed in NFPA 1901 for Hose Bed lighting requirements.</p> <ul style="list-style-type: none"> Light strip shall be installed along the front edge of the hose bed. 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> Light strip shall be installed on the rear of the boom support. <p>The lights shall be activated by a cup switch at the rear of the apparatus no more than 72.00" from the ground.</p> <p><u>REAR SCENE LIGHT(S)</u></p> <p>There shall be two (2) HiViz item FT-GSMJR-*, 5.04" high x 7.40" wide x 1.54" deep 5,000 raw lumens light(s) with white LEDs chrome trim and chrome optic holder(s) surface mounted at the rear of the apparatus, One each side as high as possible of rear body bulkhead.</p> <p>The light(s) shall be controlled by a switch at the driver's side switch panel and by a cup switch at the passenger's side rear bulkhead.</p> <p>The light(s) may be load managed when the parking brake is applied.</p> <p><u>WALKING SURFACE LIGHT</u></p> <p>There shall be two (2) Model P25 12-volt DC LED lights provided to illuminate the top of body walking surface. These LED lights shall be located on the rear facing surface of the upper portion of the body to illuminate the walking surface to the platform basket. There shall be a Model FRP, 4" round black 12-volt DC LED floodlight located forward on the left side top of the body.</p> <p>These lights shall be activated when "Aerial Master" is on.</p> <p><u>WATER TANK</u></p> <p>The water tank shall have a capacity of 300 gallons and shall be constructed of UV stabilized ultra high impact polypropylene plastic.</p> <p>The joints and seams shall be nitrogen welded inside and out.</p> <p>The tank shall be baffled in accordance with the current edition of NFPA 1901 requirements.</p> <p>The baffles shall have vent openings at both the top and bottom of each baffle to permit movement of air and water between compartments.</p> <p>The longitudinal partitions shall be constructed of 0.38" polypropylene plastic and extend from the bottom of the tank through the top cover to allow positive welding.</p> <p>The transverse partitions extend from 4.00" off the bottom to the underside of the top cover.</p> <p>All partitions interlock and shall be welded to the tank bottom and sides.</p> <p>The tank top shall be constructed of 0.50" polypropylene.</p> <p>It shall be recessed 0.38" and shall be welded to the tank sides and the longitudinal partitions.</p> <p>It shall be supported to keep it rigid during fast filling conditions.</p>		

	Bidder Complies	
	Yes	No
<p>Construction shall include 2.00" polypropylene dowels spaced no more than 30.00" apart and welded to the transverse partitions.</p> <p>Two (2) of the dowels shall be drilled and tapped (0.50" diameter, 13.00" deep) to accommodate lifting eyes.</p> <p>A sump shall be provided at the bottom of the water tank. The sump shall include a drain plug and the tank outlet.</p> <p>Tank shall be installed on top of the torque box with the use of two (2) brackets constructed of structural steel. The torque box shall resist transferring any torsional stress caused by the chassis frame flexing to the water tank.</p> <p>Rubber cushions, 0.50" thick x 3.00" wide, shall be placed on all horizontal surfaces that the tank rests on.</p> <p>Stops shall be provided to prevent an empty tank from bouncing excessively while moving vehicle.</p> <p>Tank mounting system shall be approved by the manufacturer.</p> <p>Fill tower shall be constructed of .50" polypropylene and shall be a minimum of 6.00" wide x 12.00" long.</p> <p>Fill tower shall be furnished with a .25" thick polypropylene screen and a hinged cover.</p> <p>An overflow pipe, constructed of 3.00" schedule 40 polypropylene, shall be installed approximately halfway down the fill tower, and extend through the water tank and exit to the rear of the rear axle.</p> <p><u>HOSE BED</u></p> <p>The hose bed shall be fabricated of 0.125" 5052-H32 aluminum with a tensile strength range of 31,000 to 38,000 psi.</p> <p>The upper and rear edges of the hose bed side panels shall have a double break for rigidity.</p> <p>The hose bed shall be located ahead of the ladder turntable.</p> <p>There shall be a hose chute to the side and rear of the hose bed on the right side to allow for payout/removal of the hose.</p> <p>The hose bed flooring shall consist of removable aluminum grating with a top surface that is perforated to aid in hose aeration.</p> <p>Hose capacity shall be a minimum of 800 feet of 5.00" large diameter hose.</p>		

	Bidder Complies	
	Yes	No
<p><u>AERIAL HOSE BED HOSE RESTRAINT</u></p> <p>The hose in the hose bed shall be restrained as follows:</p> <ul style="list-style-type: none"> • The hose bed forward of the aerial boom support and in the upper body area shall be restrained by a black vinyl cover with Velcro® securing all four (4) sides. • The hose bed chute located under the aerial basket shall be restrained by an aluminum treadplate cover and guide plate at the transition point of the upper hose bed to the lower hose chute. The cover shall hinge to the inside to allow ease of access to the hose. • The rear of the hose bed chute shall be restrained with black webbing that shall have 1.00" web straps that loop through footman loops and fasten with spring clip and hook fasteners. <p><u>RUNNING BOARDS</u></p> <p>The running boards shall be fabricated of 0.125" bright aluminum treadplate and supported by structural steel angle assemblies bolted to the chassis frame rails.</p> <p>Running boards shall be 13.00" deep and are spaced away from the body 0.50".</p> <p>A splash guard shall be provided to keep road dirt or water from splashing up onto the pump panels.</p> <p>The running boards shall have a riser on the body to protect the painted surface from damage by stepping on the running boards.</p> <p>The entire surface of the running boards shall be covered with bright aluminum treadplate.</p> <p><u>TURNTABLE STEPS</u></p> <p>Access to the turntable shall be provided by a set of swing-down steps on the left side of the truck. There shall be no bottom flip step provided. The bottom step shall have a step height not exceeding 24.00" from the ground to the top surface of the step at any time. All steps shall have a height no greater than 14.00" from top surface to top surface.</p> <p>The access steps shall be located just behind the front body and in front of the middle stabilizer.</p> <p>The swing down step assembly shall be constructed of D/A finished aluminum with bright aluminum treadplate steps. The steps shall have a punched grip pattern design.</p> <p>The stepwell shall be lined with bright aluminum treadplate to act as scuffplates.</p> <p>A knurled aluminum handrail shall be provided on the left side of the steps.</p> <p>Holes shall be provided in each sidestep plate for hand holds.</p> <p>The steps shall be connected to the "Do Not Move Truck" indicator in the cab.</p>		

	Bidder Complies	
	Yes	No
<p><u>STEP LIGHTS</u></p> <p>There shall be three (3) white LED step lights provided for the aerial turntable access steps.</p> <p>In order to ensure exceptional illumination, each light shall provide a minimum of 25 foot-candles (fc) covering an entire 15" x 15" square placed ten (10) inches below the light and a minimum of 1.5 fc covering an entire 30" x 30" square at the same ten (10) inch distance below the light.</p> <p>The step lights shall be actuated by the aerial master switch in the cab.</p> <p><u>SMOOTH ALUMINUM REAR WALL</u></p> <p>The rear wall shall be smooth aluminum.</p> <p><u>TOW EYES</u></p> <p>Two (2) rear painted tow eyes shall be located at the rear of the apparatus and shall be mounted directly to the frame rails. The inner and outer edges of the tow eyes shall be radiused.</p> <p><u>COMPARTMENTATION</u></p> <p>Compartmentation shall be fabricated of 0.125" 5052 aluminum.</p> <p>Side compartments shall be an integral assembly with the rear fenders.</p> <p>Circular fender liners shall be provided. For prevention of rust pockets and ease of maintenance, the fender liners shall be formed from aluminum and removable for maintenance.</p> <p>Compartment flooring shall be of the sweep out design with the floor higher than the compartment door lip.</p> <p>Drip protection shall be provided above the doors by means of bright aluminum extrusion, formed bright aluminum treadplate or polished stainless steel.</p> <p>The top of the compartment shall be covered with bright aluminum treadplate rolled over the edges on the front, rear and outward side. These covers shall have the corners welded.</p> <p>Side compartment covers shall be separate from the compartment tops.</p> <p>All screws and bolts, which are not Grade 8, shall be stainless steel and where they protrude into a compartment shall have acorn nuts on the ends to prevent injury.</p> <p><u>UNDERBODY SUPPORT SYSTEM</u></p> <p>The backbone of the body support system shall begin with the aerial torque box which is the strongest component of the apparatus and is designed for sustaining maximum loads.</p> <p>An aluminum body structure shall be mounted to the aerial torque box at four (4) points using neoprene elastomer isolators. The front mounts shall attach from structural steel brackets on</p>		

	Bidder Complies	
	Yes	No
<p>the sides of the torque box to a structural tube on the body. The rear mounts shall attach structural members on the rear body to the top of the rear down rigger mounting structure.</p> <p>The combination of the elastomer isolators and the body structure design allow the chassis and torque box to flex without driving loads into the body.</p> <p>The compartment floor support design shall result in an 800 lb equipment support rating per lower compartment, and a 500 lb equipment support rating for the upper, over the axle compartments.</p> <p><u>AGGRESSIVE WALKING SURFACE</u></p> <p>All exterior surfaces designated as stepping, standing, and walking areas shall comply with the required average slip resistance of the current NFPA standards.</p> <p><u>LOUVERS</u></p> <p>All body compartments shall be vented to provide one (1) way airflow out of the compartment that prevents water and dirt from gaining access to the compartment.</p> <p><u>TESTING OF BODY DESIGN</u></p> <p>Body structural analysis shall be fully tested. Proven engineering and test techniques such as finite element analysis, model analysis, and strain gauging have been performed with special attention given to fatigue, life and structural integrity of the body and substructure.</p> <p>The body shall be tested while loaded to its greatest in-service weight.</p> <p>The criteria used during the testing procedure shall include:</p> <ul style="list-style-type: none"> • Raising opposite corners of the vehicle tires 9.00" to simulate the twisting a truck may experience when driving over a curb. • Making a 90-degree turn, while driving at 20 mph to simulate aggressive driving conditions. • Driving the vehicle on at 35 mph on a washboard road. • Driving the vehicle at 55 mph on a smooth road. • Accelerating the vehicle fully, until reaching the approximate speed of 45 mph on rough pavement. <p>Evidence of the actual testing techniques shall be made available upon request.</p> <p><u>LEFT SIDE COMPARTMENTATION</u></p> <p>A full height rollup door compartment ahead of the rear wheels shall be 29.16" wide x 28.25" high x 27.13" deep inside with a door opening of 26.13" wide x 22.63" high.</p> <p>One (1) rollup door compartment above the fender compartments and over the rear axles shall be provided. The compartment shall be 84.00" wide x 22.13" high x 27.13" deep inside with a door opening of 81.00" wide x 16.50" high.</p>		

	Bidder Complies	
	Yes	No
<p>A full height rollup door compartment behind the rear wheels shall be 41.25" wide x 53.88" high x 27.13" deep. The door opening shall be 38.25" wide x 48.25" high.</p> <p>One (1) rollup door compartment behind the rear stabilizer shall be provided. The compartment shall be 18.13" wide x 45.75" high x 27.13" deep inside with a door opening of 15.13" wide x 39.13" high.</p> <p>Roll-up door compartments shall include a drip pan below the roll of the door.</p> <p><u>RIGHT SIDE COMPARTMENTATION</u></p> <p>A full height rollup door compartment ahead of the rear wheels shall be 29.13" wide x 28.25" high x 27.13" deep inside with a door opening of 26.13" wide x 22.63" high.</p> <p>A full height rollup door compartment ahead of the rear wheels shall be 18.38" wide x 35.25" high x 9.91" deep inside with a door opening of 15.38" wide x 29.63" high.</p> <p>One (1) rollup door compartment above the fender compartments and over the rear axles shall be provided. The compartment shall be 59.00" wide x 22.13" high x 15.75" deep inside with a door opening of 56.00" wide x 16.50" high.</p> <p>A full height rollup door compartment behind the rear wheels shall be 41.25" wide x 53.88" high x 27.13" deep in the lower 48.38" of compartment height and 12.75" deep in the remaining upper portion. The door opening shall be 38.25" wide x 48.25" high.</p> <p>One (1) rollup door compartment behind the rear stabilizer shall be provided. The compartment shall be 18.13" wide x 39.25" high x 27.13" deep inside with a door opening of 15.13" wide x 39.13" high.</p> <p>Roll-up door compartments shall include a drip pan below the roll of the door.</p> <p><u>SIDE COMPARTMENT ROLL-UP DOORS</u></p> <p>There shall be nine (9) compartment doors installed on the side compartments. The Gortite doors shall be double faced aluminum construction and painted one (1) color to match the lower portion of the body.</p> <p>Lath sections shall be an interlocking rib design and shall be individually replaceable without complete disassembly of door.</p> <p>Between each slat at the pivoting joint shall be a PVC inner seal to prevent metal to metal contact and prevent dirt or moisture from entering the compartments. Seals shall allow door to operate in extreme temperatures ranging from plus 180 to minus 40 degrees Fahrenheit. Side, top and bottom seals shall be provided to resist ingress of dirt and weather and be made of Santoprene.</p>		

	Bidder Complies	
	Yes	No
<p>All hinges, barrel clips and end pieces shall be nylon 66. All nylon components shall withstand temperatures from plus 300 to minus 40 degrees Fahrenheit. Hardened plastic shall not be acceptable.</p> <p>A polished stainless-steel lift bar to be provided for each roll-up door. Lift bar shall be located at the bottom of door and have latches on the outer extrusion of the doors frame. A ledge shall be supplied over lift bar for additional area to aid in closing the door.</p> <p>Doors shall be constructed from an aluminum box section. The exterior surface of each slat shall be flat. The interior surfaces shall be concave to provide strength and prevent loose equipment from jamming the door from inside.</p> <p>To conserve space in the compartments, the spring roller assembly shall not exceed 3.00" in diameter. A garage style roll door shall not be acceptable.</p> <p>The header for the rollup door assembly shall not exceed 4.00".</p> <p>A heavy-duty magnetic switch shall be used for control of open compartment door warning lights.</p> <p><u>REAR BUMPER</u></p> <p>A 3.00" rear bumper shall be furnished. Bumper shall be constructed of steel and shall be covered with polished aluminum treadplate. The bumper shall be 2.50" deep x 4.00" high and shall be spaced away from the body approximately 0.50". The corners of the bumper shall be angled at 45 degrees to be flush with the angled rear body. It shall extend the full width of the body.</p> <p><u>ROLL UP DOOR HANDHOLD CUT-OUT</u></p> <p>There shall be nine (9) compartment doors that have two (2) cut-outs in the bottom door flange for easier access to the lift bar.</p> <p><u>PULL STRAP, DOOR</u></p> <p>There shall be two (2) compartment doors provided with pull straps. The compartment door(s) to be provided with a pull strap shall be LS3 and RS3.</p> <p><u>ROLL-UP DOOR TRIM</u></p> <p>The exterior of the aluminum trim around the door opening shall be painted job color.</p> <p>There shall be ten (10) compartments with the trim painted.</p> <p><u>COMPARTMENT LIGHTING</u></p> <p>There shall be nine (9) compartment(s) with two (2) white 12-volt DC LED compartment light strips. The dual light strips shall be centered vertically along each side of the door framing. There shall be two (2) light strips per compartment. The dual light strips shall be in all body compartment(s).</p>		

	Bidder Complies	
	Yes	No
<p>Any remaining compartments without light strips shall have a 6.00" diameter Truck-Lite, Model: 79384 light. Each light shall have a number 1076 one filament, two wire bulbs.</p> <p>Opening the compartment door shall automatically turn the compartment lighting on.</p> <p><u>MOUNTING TRACKS</u></p> <p>There shall be recessed tracks installed vertically to support the adjustable shelf(s).</p> <p>Tracks shall not protrude into any compartment to provide the greatest compartment space and widest shelves possible.</p> <p>The tracks shall be provided in each compartment except for the one that contains the pump operator's panel.</p> <p><u>ADJUSTABLE SHELVES</u></p> <p>There shall be three (3) shelves with a capacity of 500 lb provided.</p> <p>The shelf construction shall consist of .188" aluminum painted spatter gray with 2.00" sides.</p> <p>Each shelf shall be infinitely adjustable by means of a threaded fastener, which slides in a track.</p> <p>The shelves shall be held in place by .12" thick stamped plated brackets and bolts.</p> <p>The location(s) shall be in RS1 in the lower third, in RS2 in the upper third and in RS1 in the upper third.</p> <p><u>SLIDE-OUT FLOOR MOUNTED TRAY</u></p> <p>There shall be two (2) floor mounted slide-out tray(s) with 2.00" sides provided LS2, RS2, and RS4. Each tray shall be rated for up to 500lb in the extended position. The tray(s) shall be constructed of .19" aluminum with non-welded corners. The finish shall be painted spatter gray.</p> <p>The trays will be designed for maximum compartment width and depth.</p> <p>There shall be two undermount-roller bearing type slides rated at 250lb each provided. The pair of slides shall have a safety factor rating of 2.</p> <p>To ensure years of dependable service, the slides shall be coated with a finish that is tested to withstand a minimum of 1,000 hours of salt spray per ASTM B117.</p> <p>To ensure years of easy operation, the slides shall require no more than a 50lb force for push-in or pull-out movement when fully loaded after having been subjected to a 40-hour vibration (shaker) test under full load. The vibration drive file shall have been generated from accelerometer data collected from a heavy truck chassis driven over rough gravel roads in an unloaded condition. Proof of compliance shall be provided upon request.</p> <p>Automatic locks shall be provided for both the "in" and "out" positions. The trip mechanism for the locks shall be located at the front of the tray for ease of use with a gloved hand.</p>		

	Bidder Complies	
	Yes	No
<p><u>SLIDE-OUT FLOOR MOUNTED TRAY</u></p> <p>There shall be one (1) floor mounted slide-out tray(s) with 2.00" sides provided in the left side compartment forward of the rear axle. Each tray shall be rated for up to 500lb in the extended position. The tray(s) shall be constructed of .19" aluminum with non-welded corners. The finish shall be painted to match compartment interior.</p> <p>There shall be two undermount-roller bearing type slides rated at 250lb each provided. The pair of slides shall have a safety factor rating of 2.</p> <p>To ensure years of dependable service, the slides shall be coated with a finish that is tested to withstand a minimum of 1,000 hours of salt spray per ASTM B117.</p> <p>To ensure years of easy operation, the slides shall require no more than a 50lb force for push-in or pull-out movement when fully loaded after having been subjected to a 40-hour vibration (shaker) test under full load. The vibration drive file shall have been generated from accelerometer data collected from a heavy truck chassis driven over rough gravel roads in an unloaded condition. Proof of compliance shall be provided upon request.</p> <p>Automatic locks shall be provided for both the "in" and "out" positions. The trip mechanism for the locks shall be located at the front of the tray for ease of use with a gloved hand.</p> <p>A fixed shelf with 2.00" sides shall be provided on the right side of the tray. It shall be approximately 14.50" wide x 25.50" deep and allow for a 13.00" high storage area underneath. Vertical partitions on the left, rear and right shall support the tray.</p> <p><u>EQUIPMENT MOUNTING</u></p> <p>Mounting shall be provided on the tray for the following:</p> <ul style="list-style-type: none"> • a PAC 1070 bracket on the left forward area of the partition for a play pipe with tips • mount for a gated wye on the tray floor • Velcro® strap to contain miscellaneous pail sizes on the tray floor • an open storage area under the fixed shelf for miscellaneous equipment • a PAC 1003HD bracket on the fixed shelf • a bracket for two (2) hydrant wrenches and a spanner on the fixed shelf • floor mounts for miscellaneous adapters on the fixed shelf <p><u>TOOL BOARD</u></p> <p>An aluminum tool board shall be provided.</p> <p>It shall be a minimum of .188" thick with .20" diameter holes in a pegboard pattern with 1.00" centers between holes.</p> <p>A 1.00" x 1.00" aluminum tube frame shall be welded to the edge of the board.</p>		

	Bidder Complies	
	Yes	No
<p>The board shall be installed on adjustable tracks on a slide out tray. The tracks shall allow side to side adjustment. The board shall be as high as space permits and full length of the tray. The tray is not included in this option.</p> <p>There shall be Two (2) toolboard(s) provided. The toolboard(s) shall be spatter gray painted and installed in roll out tray in LS2 compartment.</p> <p><u>SLIDE OUT TOOLBOARD</u></p> <p>There shall be one (1) toolboard(s) provided, spatter gray painted, and installed in LS1, centered from left to right in the door frame.</p> <p>It shall be a minimum of .188" thick with .203" diameter holes in a pegboard pattern with 1.00" centers between holes.</p> <p>A 1.00" x 1.00" aluminum tube frame shall be welded to the edge of the pegboard.</p> <p>The board shall be mounted on an undermount - roller bearing type slide rated at 250lbs with a 100% safety factor.</p> <p>To ensure years of dependable service the slide shall be coated with a finish that is tested to withstand a minimum of 1,000 hours of salt spray per ASTM B117.</p> <p>To ensure years of easy operation, the slide shall also be able to operate smoothly without bumps or sticky spots after a 40 hour vibrations test (reference MIL-STD 810E section 514.4 basic transportation vibration category 1) while fully loaded. Proof of compliance shall be provided upon request.</p> <p>The slide shall be mounted stationary within the compartment.</p> <p>The board shall have positive lock in the stowed and extended position.</p> <p>A 14.25" wide tray with 2.00" high sides shall be centered above the slide and under the toolboard.</p> <p><u>EQUIPMENT MOUNTING</u></p> <p>Mounting shall be provided on the right side of the toolboard for the following:</p> <ul style="list-style-type: none"> • brackets for two (2) pike poles, a maximum of 36.00" long with a standard head • brackets for two (2) sledgehammers, a maximum of 36.00" long • brackets for two (2) crowbars, a maximum of 36.00" long • bracket for a 36" pipe wrench <p>Mounting shall be provided on the left side of the toolboard for the following:</p> <ul style="list-style-type: none"> • brackets for two (2) halligan tools, a maximum of 36.00" long • brackets for two (2) flat head axes, a maximum of 36.00" long 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • brackets for three (3) pick head axes, a maximum of 36.00" long • bracket for a 24" bolt cutter <p>Dividers and pockets for the tool heads shall be provided on the floor of the slide-out tray to accommodate the equipment.</p> <p><u>RUB RAIL</u></p> <p>Bottom edge of the side compartments shall be trimmed with a bright aluminum extruded rub rail.</p> <p>Trim shall be 3.12" high with 1.50" flanges turned outward for rigidity.</p> <p>The rub rails shall not be an integral part of the body construction, which allows replacement in the event of damage.</p> <p><u>BODY FENDER CROWNS</u></p> <p>Polished stainless-steel fender crowns shall be provided around the rear wheel openings.</p> <p>An unpainted fender liner shall be provided to avoid paint chipping. The liners shall be removable to aid in the maintenance of rear suspension components.</p> <p>A dielectric barrier shall be provided between the fender crown fasteners (screws) and the fender sheet metal to prevent corrosion.</p> <p>The fender crowns shall be held in place with stainless steel screws that thread directly into a composite nut and not directly into the parent body sheet metal to eliminate dissimilar metals contact and greatly reduce the chance for corrosion.</p> <p><u>HANDRAILS</u></p> <p>The handrails shall be 1.25" diameter anodized aluminum extrusion, with a ribbed design, to provide a positive gripping surface.</p> <p>Chrome plated end stanchions shall support the handrail. Plastic gaskets shall be used between end stanchions and any painted surfaces.</p> <p>Drain holes shall be provided in the bottom of all vertically mounted handrails.</p> <p>Handrails shall be provided to meet NFPA 1901 section 15.8 requirements. The handrails shall be installed as noted on the sales drawing.</p> <p><u>THREE AIR BOTTLE/EXTINGUISHER STORAGE COMPARTMENT</u></p> <p>A total of two (2) air bottle compartments shall be provided and located one (1) on the left side and one (1) on the right side centered between the tandem rear wheels. The compartment shall consist of individual bins each designed to hold an air bottles or extinguishers with a maximum diameter of 8.00" and a maximum depth of 26.00".</p>		

	Bidder Complies	
	Yes	No
<p>Each compartment shall hold three (3), two (2) stored next to each other in the top area, and one (1) stored centered below. Each bin shall be separated by a partition.</p> <p>A drain hole and black Dura-Surf friction reducing material shall be provided on the floor of each compartment. A lift up with pneumatic spring with a pair of Southco raised trigger C2 chrome lever latches shall be provided for each compartment. The door shall be brushed stainless steel. A dielectric barrier shall be provided between the door hinge, hinge fasteners and the body sheet metal.</p> <p><u>COMPARTMENT STRAP</u></p> <p>Straps shall be provided in the compartment(s) to help contain the equipment. The straps shall wrap around the neck of each and attach to the wall of the compartment.</p> <p><u>AIR BOTTLE STORAGE (SINGLE)</u></p> <p>A quantity of four (4) air bottle compartments, approximately 7.50" wide x 7.50" tall x 26.00" deep, shall be provided on the left side forward of the rear wheels, on the left side rearward of the rear wheels, on the right side forward of the rear wheels and on the right side rearward of the rear wheels. The compartment will be square with angled corners. A brushed stainless-steel door with a Southco raised trigger C2 chrome lever latch shall be provided to contain the air bottle. A dielectric barrier shall be provided between the door hinge, hinge fasteners and the body sheet metal.</p> <p>Inside the compartment, black Dura-Surf friction reducing material and strap to contain the air bottles shall be provided.</p> <p><u>EXTENSION LADDER</u></p> <p>There shall be one (1) 35' two (2) section aluminum Duo-Safety Series 1200-A extension ladder(s) provided.</p> <p><u>ADDED EXTENSION LADDER</u></p> <p>There shall be two (2) 24', two (2) section, aluminum, Duo-Safety Series 900A extension ladder provided.</p> <p><u>ROOF LADDER</u></p> <p>There shall be one (1) 16' aluminum, Duo-Safety, Series 875-DR roof ladder(s) provided. The ladder(s) shall have hooks on both ends.</p> <p><u>ADDED ROOF LADDER</u></p> <p>There shall be one (1) 16' roof, aluminum, Series 875-A-DR provided.</p> <p><u>AERIAL FOLDING LADDER</u></p> <p>There shall be one (1) 10' aluminum Duo-Safety Series 585-A folding ladder(s) provided and located in the aerial torque box.</p>		

	Bidder Complies	
	Yes	No
<p><u>GROUND LADDER STORAGE</u></p> <p>The ground ladders are stored within the torque box and are removable from the rear.</p> <p>Ladders shall be enclosed to prevent road dirt and debris from fouling or damaging the ladders.</p> <p>The ladders rest in full-length stainless-steel slides and are arranged in such a manner that any one ladder can be removed without having to move or remove any other ladder.</p> <p>A Gortite rollup door shall be provided at the rear, double faced, aluminum construction, and an anodized satin finish. A polished stainless-steel lift bar to be provided for the rear roll-up door. The latching mechanism shall consist of a full-length lift bar lock with latches on the outer extrusion of the door frame.</p> <p>A stainless plate with a 2-bend flange and a stainless-steel hinge shall be provided to secure the aerial ladder complement. The plate assembly shall be mounted to the bottom of the entrance of the torque box ladder storage area.</p> <p>When the plate is vertical, it shall secure the ladders and prevent them from migrating to the rear of the apparatus. When the plate is down and not securing the ladders, the rollup door can not close, which shall activate the "Open Door Indicator Light" within the cab. The hinged plate shall have a positive latching feature that shall secure the plate in the vertical position.</p> <p><u>Compartment Storage</u></p> <p>Below the ground ladder storage shall be a water-resistant storage compartment with interior measurements of 36.75" wide x 14.88" high x 19.75" deep. The compartment shall have a single pan, drop down door with a pair of Southco raised trigger C2 chrome latches. The compartment and door material shall match body interior. The opening shall be 32.38" wide x 11.75" high.</p> <p><u>LADDER STORAGE LIGHTING</u></p> <p>There shall be 36.00" white 12-volt DC LED strip lights provided to illuminate the torque box ladder storage area and the compartment directly below the ladder storage. One (1) light shall be provided on each side of the ladder storage area.</p> <p>The lights shall be activated when the ladder storage compartment door is opened.</p> <p><u>DURA-SURF LADDER SLIDES</u></p> <p>Black Dura-Surf friction reducing material shall be added to the stainless-steel slides, on the bottom horizontal surfaces, of the ladder storage rack.</p> <p><u>NESTED LADDER STORAGE</u></p> <p>There shall be nested ladders on the left side of the ladder storage compartment. The ladders shall be nested so that one ladder can be removed without removing the adjoining ladder.</p> <p>There shall be two (2) pike pole(s) provided. The pike pole(s) shall be a Fire Hooks Unlimited 8-foot roof hook.</p>		

	Bidder Complies	
	Yes	No
<p>The pike pole is not on the apparatus as manufactured. The fire department shall provide and mount the pike poles.</p> <p><u>PIKE POLE STORAGE IN TORQUE BOX/LADDER STORAGE</u></p> <p>There shall be aluminum tubing provided in the torque box/ladder storage area for a total of two (2) pike poles. The pike pole tube(s) shall be notched to allow a New York style pike pole to fit in the tube.</p> <p>If the head of a pike pole can come into contact with a painted surface, a stainless steel scuffplate shall be provided.</p> <p><u>PIKE POLE STORAGE IN TORQUE BOX/LADDER STORAGE</u></p> <p>There shall be ABS tubing provided in the torque box/ladder storage area for a total of four (4) pike poles.</p> <p>If the head of a pike pole can come into contact with a painted surface, a stainless steel scuffplate shall be provided.</p> <p><u>MIDSHIP FIRE PUMP</u></p> <p>Midship fire pump shall be a Waterous S100, 2000 gpm single (1) stage midship mounted centrifugal type.</p> <p>Pump shall be the class "A" type.</p> <p>Pump shall deliver the percentage of rated discharges at the pressures indicated below:</p> <ul style="list-style-type: none"> - 100% of rated capacity at 150 psi net pump pressure. - 100% of rated capacity at 165 psi net pump pressure. -70% of rated capacity at 200 psi net pump pressure. -50% of rated capacity at 250 psi net pump pressure. <p>Entire pump and both suction and discharge passages shall be hydrostatically tested to a pressure of 600 psi (40.8 bar).</p> <p>Pump shall be fully tested at the pump manufacturer's factory to the performance requirements outlined in the current NFPA 1901 standards and shall be free from objectionable pulsation and vibration.</p> <p>Pump body and related parts shall be of fine grain, alloy cast iron with a minimum tensile strength of 30,000 psi (2041.2 bar). Pumps utilizing castings made of lower tensile strength cast iron shall not be acceptable.</p> <p>All moving parts in contact with water shall be of high-quality bronze or stainless steel.</p>		

	Bidder Complies	
	Yes	No
<p><u>MECHANICAL SEAL ON PUMP</u></p> <p>Pump shall be equipped with a self-adjusting, maintenance-free, mechanical shaft seal.</p> <p>The mechanical seal shall consist of a flat, highly polished, spring fed carbon ring that rotates with the impeller shaft. The carbon ring shall press against a highly polished stainless-steel stationary ring that is sealed within the pump body.</p> <p>In addition, a throttling ring shall be pressed into the steel chamber cover, providing a very small clearance around the rotating shaft in the event of a mechanical seal failure. The pump performance shall not deteriorate, nor shall the pump lose prime, while drafting if the seal fails during pump operation.</p> <p>Wear rings shall be bronze and easily replaceable to restore original pump efficiency and eliminate the need to replace the entire pump casing due to wear.</p> <p><u>PUMP TRANSMISSION</u></p> <p>Pump transmission shall be made of a three (3) piece, high tensile aluminum, horizontally split casing. Power transfer to pump shall be through a passive lubricated, Morse HY-VO drive chain.</p> <p>Drive shafts shall be a minimum of 2.35" diameter hardened and ground alloy steel. All shafts shall be ball bearing supported. The case shall be designed as to eliminate the need for water cooling.</p> <p><u>PUMPING MODE</u></p> <p>An interlock system shall be provided to ensure that the pump drive system components are properly engaged so that the apparatus can be safely operated. The interlock system shall be designed to allow stationary pumping only.</p> <p><u>AIR PUMP SHIFT</u></p> <p>Pump shift engagement shall be made by a two (2) position sliding collar, actuated pneumatically (by air pressure), with a three (3) position air control switch located in the cab. A manual back-up shift control shall also be located on the left side pump panel.</p> <p>Two (2) indicator lights shall be provided adjacent to the pump shift inside the cab. One (1) green light shall indicate the pump shift has been completed and be labeled "pump engaged". The second green light shall indicate when the pump has been engaged, and that the chassis transmission is in pump gear. This indicator light shall be labeled "OK to pump".</p> <p>The pump shift shall be interlocked to prevent the pump from being shifted out of gear when the chassis transmission is in gear to meet NFPA requirements.</p> <p>The pump shift control in the cab shall be illuminated to meet NFPA requirements.</p>		

	Bidder Complies	
	Yes	No
<p><u>TRANSMISSION LOCK-UP</u></p> <p>The direct gear transmission lock-up for the fire pump operation shall engage automatically when the pump shift control in the cab is activated.</p> <p><u>AUXILIARY COOLING SYSTEM</u></p> <p>A supplementary heat exchange cooling system shall be provided to allow the use of water from the discharge side of the pump for cooling the engine water. Heat exchanger shall be cylindrical type and shall be a separate unit. It shall be installed in the pump or engine compartment with the control located on the pump operator's control panel. Exchanger shall be plumbed to the master drain valve.</p> <p><u>INTAKE RELIEF VALVE</u></p> <p>There shall be One (1) Trident Air Max intake relief valve(s) installed on the suction side of the pump preset at 125 psig .</p> <p>The relief valve shall have a working range of 50 PSI to 350 PSI.</p> <p>The outlet shall terminate below the frame rails with a 2.50" National Standard hose thread adapter and shall have a "do not cap" warning tag.</p> <p>One adjustable air regulator and pressure indicating gauge shall be located on a common bezel on the left side pump panel to control the intake valve(s).</p> <p><u>PRESSURE CONTROLLER</u></p> <p>A Pressure Governor shall be provided. An electric pressure governor shall be provided which is capable of automatically maintaining a desired preset discharge pressure in the water pump. When operating in the pressure control mode, the system shall automatically maintain the discharge pressure set by the operator (within the discharge capabilities of the pump and water supply) regardless of flow, within the discharge capacities of the water pump and water supply.</p> <p>A pressure transducer shall be installed in the water discharge of the pump. The transducer continuously monitors pump pressure sending a signal to the Electronic Control Module (ECM).</p> <p>The governor can be used in two (2) modes of operation, RPM mode and pressure modes.</p> <p>In the RPM mode, the governor can be activated after vehicle parking brake has been set. When in this mode, the governor shall maintain the set engine speed, regardless of engine load (within engine operation capabilities).</p> <p>In the pressure mode, the governor system can only operate after the fire pump has been engaged and the vehicle parking brake has been set. When in the pressure mode, the pressure controller monitors the pump pressure and varies engine speed to maintain a precise pump</p>		



	Bidder Complies	
	Yes	No
<p>pressure. The pressure controller shall use a quicker reacting J1939 database for engine control.</p> <p>A preset feature allows a predetermined pressure or rpm to be set.</p> <p>A pump cavitation protection feature is also provided which shall return the engine to idle should the pump cavitate. Cavitation is sensed by the combination of pump pressure below 30 psi and engine speed above 2000 rpm for more than five (5) seconds.</p> <p>The throttle shall be a vernier style control, with a large control knob for use with a gloved hand. A throttle ready light shall be provided adjacent to the throttle control. A large 0.75" RPM display shall be provided to be visible at a glance.</p> <p>Check engine and stop engine indicator lights shall be provided for easy viewing.</p> <p>Large 0.75" push buttons shall be provided for menu, mode, preset, and silence selections.</p> <p>The water tank level indicator shall be incorporated in the pressure governor.</p> <p>A fuel level indicator shall be incorporated in the pressure controller.</p> <p>A pump hour meter shall be incorporated in the pressure controller.</p> <p>The pressure controller shall incorporate monitoring for engine temperature, oil pressure, fuel level alarm, and voltage. Pump monitoring shall include, pump gearcase temperature, error codes, diagnostic data, pump service reminders, and time stamped data logging, to allow for fast accurate trouble shooting. It shall also notify the driver/engineer of any problems with the engine and the apparatus. Complete understandable messages shall be provided in a 20-character display, providing for fewer abbreviations in the messages. An automatic dim feature shall be included for night operations.</p> <p>The pressure controller shall include a USB port for easy software upgrades, which can be downloaded through a USB memory stick, eliminating the need for a laptop for software installations.</p> <p>A complete interactive manual shall be provided with the pressure controller.</p> <p><u>PRIMING PUMP</u></p> <p>The priming pump shall be a Trident Emergency Products compressed air powered, high efficiency, multistage venturi based AirPrime System, conforming to standards outlined in the current edition of NFPA 1901.</p> <p>All wetted metallic parts of the priming system are to be of brass and stainless-steel construction.</p> <p>One (1) priming control shall open the priming valve and start the pump primer.</p>		

	Bidder Complies	
	Yes	No
<p><u>PUMP MANUALS</u></p> <p>There shall be a total of two (2) pump manuals provided by the pump manufacturer and furnished with the apparatus. The manuals shall be provided by the pump manufacturer in the form of two (2) electronic copies. Each manual shall cover pump operation, maintenance, and parts.</p> <p><u>PLUMBING, STAINLESS STEEL AND HOSE</u></p> <p>All inlet and outlet lines shall be plumbed with either stainless steel pipe, flexible polypropylene tubing or synthetic rubber hose reinforced with hi-tensile polyester braid. All hoses shall be equipped with brass or stainless-steel couplings. All stainless-steel hard plumbing shall be a minimum of a schedule 10 wall thickness.</p> <p>Where vibration or chassis flexing may damage or loosen piping or where a coupling is required for servicing, the piping shall be equipped with victaulic or rubber couplings.</p> <p>Plumbing manifold bodies shall be ductile cast iron or stainless steel.</p> <p>All piping lines are to be drained through a master drain valve or shall be equipped with individual drain valves. All drain lines shall be extended with a hose to drain below the chassis frame.</p> <p>All water carrying gauge lines shall be of flexible polypropylene tubing.</p> <p>All piping, hose and fittings shall have a minimum of a 500 PSI hydrodynamic pressure rating.</p> <p><u>MAIN PUMP INLETS</u></p> <p>Two (2) 6.00" pump inlets shall be provided on the right side of the vehicle.</p> <p>The suction inlets shall include removable zinc screens that are designed to provide cathodic protection for the pump, thus reducing corrosion in the pump.</p> <p><u>MAIN PUMP INLET CAP</u></p> <p>The main pump inlets shall have National Standard Threads with a long handle chrome cap.</p> <p>The cap shall incorporate a thread design to automatically relieve stored pressure in the line when disconnected (no exception).</p> <p><u>SHORT SUCTION TUBE(S)</u></p> <p>The suction tube(s) on the water pump shall have short suction tube(s) installed to allow for installation of adapters, elbows, or intake valves without excessive overhang.</p> <p><u>VALVES</u></p> <p>All ball valves shall be Akron® Brass in-line valves. The Akron valves shall be the 8000 series heavy-duty style with a stainless-steel ball and a simple two-seat design. No lubrication or regular maintenance is required on the valve.</p>		

	Bidder Complies	
	Yes	No
<p>Valves shall have a ten (10) year warranty.</p> <p><u>LEFT SIDE INLET</u> There shall be one (1) auxiliary inlet with a 2.50" valve at the left side pump panel, terminating with a 2.50" (F) National Standard hose thread adapter.</p> <p>The auxiliary inlet shall be provided with a strainer, chrome swivel and plug.</p> <p>The location of the valve for the one (1) inlet shall be recessed behind the pump panel.</p> <p><u>INLET CONTROL</u> The side auxiliary inlet(s) shall incorporate a quarter-turn ball valve with the control located at the inlet valve. The valve operating mechanism shall indicate the position of the valve.</p> <p><u>INLET BLEEDER VALVE</u> A 0.75" bleeder valve shall be provided for each side gated inlet. The valves shall be located behind the panel with a swing style handle control extended to the outside of the panel. The handles shall be chrome plated and provide a visual indication of valve position. The swing handle shall provide an ergonomic position for operating the valve without twisting the wrist and provides excellent leverage. The water discharged by the bleeders shall be routed below the chassis frame rails.</p> <p><u>TANK TO PUMP</u> The booster tank shall be connected to the intake side of the pump with heavy duty piping and a quarter turn 3.00" full flow line valve with the control remotely located at the operator's panel. Tank to pump line shall run from the pump into the front face of the water tank and angle down into the tank sump. A rubber coupling shall be included in this line to prevent damage from vibration or chassis flexing.</p> <p>A check valve shall be provided in the tank to pump supply line to prevent the possibility of "back filling" the water tank.</p> <p><u>TANK REFILL</u> A 1.50" combination tank refill and pump re-circulation line shall be provided, using a quarter-turn full flow ball valve controlled from the pump operator's panel.</p> <p><u>LEFT SIDE DISCHARGE OUTLETS</u> There shall be Two (2) discharge outlets with a 2.50" valve on the left side of the apparatus, terminating with a 2.50" (M) National Standard hose thread adapter.</p> <p><u>RIGHT SIDE DISCHARGE OUTLETS</u> There shall be One (1) discharge outlet with a 2.50" valve on the right side of the apparatus, terminating with a 2.50" (M) National Standard hose thread adapter.</p>		

	Bidder Complies	
	Yes	No
<p><u>LARGE DIAMETER DISCHARGE OUTLET</u></p> <p>There shall be a 4.00" discharge outlet with a 4.00" Akron valve installed on the right side of the apparatus, terminating with a 4.00" (M) National Standard hose thread adapter. This discharge outlet shall be actuated with a small handwheel control at the pump operator's control panel.</p> <p>An indicator shall be provided to show when the valve is in the closed position.</p> <p><u>DISCHARGE CAPS/ INLET PLUGS</u></p> <p>Chrome plated, rocker lug, caps with chain shall be furnished for all discharge outlets 1.00" thru 3.00" in size, besides the pre-connected hose outlets.</p> <p>Chrome plated, rocker lug, plugs with chain shall be furnished for all auxiliary inlets 1.00" thru 3.00" in size.</p> <p>The caps and plugs shall incorporate a thread design to automatically relieve stored pressure in the line when disconnected (no exception).</p> <p><u>OUTLET BLEEDER VALVE</u></p> <p>A 0.75" bleeder valve shall be provided for each outlet 1.50" or larger. Automatic drain valves are acceptable with some outlets if deemed appropriate with the application.</p> <p>The valves shall be located behind the panel with a swing style handle control extended to the outside of the side pump panel. The handles shall be chrome plated and provide a visual indication of valve position. The swing handle shall provide an ergonomic position for operating the valve without twisting the wrist and provides excellent leverage. Bleeders shall be located at the bottom of the pump panel. They shall be properly labeled identifying the discharge they are plumbed in to. The water discharged by the bleeders shall be routed below the chassis frame rails.</p> <p><u>LEFT SIDE OUTLET ELBOWS</u></p> <p>The 2.50" discharge outlets located on the left side pump panel shall be furnished with a 2.50" (F) National Standard hose thread x 2.50" (M) National Standard hose thread, chrome plated, 45-degree elbow.</p> <p>The elbow shall incorporate a thread design to automatically relieve stored pressure in the line when disconnected (no exception).</p> <p><u>RIGHT SIDE OUTLET ELBOWS</u></p> <p>The 2.50" discharge outlets located on the right-side pump panel shall be furnished with a 2.50" (F) National Standard hose thread x 2.50" (M) National Standard hose thread, chrome plated, 45 degree elbow.</p> <p>The elbow shall incorporate a thread design to automatically relieve stored pressure in the line when disconnected (no exception).</p>		

	Bidder Complies	
	Yes	No
<p><u>LARGE DIAMETER OUTLET ELBOWS</u></p> <p>The 4.00" outlet(s) shall be furnished with one (1) 4.00" (F) National Standard hose thread x 5.00" Storz elbow adapter with Storz cap.</p> <p><u>DISCHARGE OUTLET CONTROLS</u></p> <p>The discharge outlets shall incorporate a quarter-turn ball valve with the control located at the pump operator's panel. The valve operating mechanism shall indicate the position of the valve.</p> <p>If a handwheel control valve is used, the control shall be a minimum of a 3.9" diameter stainless steel handwheel with a dial position indicator built into the center of the handwheel.</p> <p>Any 3.00 inch or larger discharge valve shall be a slow-operating valve in accordance with NFPA 16.7.5.3.</p> <p><u>AERIAL OUTLET</u></p> <p>The aerial waterway shall be plumbed from the pump to the water tower line with 5.00" pipe and a 4.00" Akron valve. The small handwheel control for the waterway valve shall be located at the pump operator's panel.</p> <p>An indicator shall be provided to show the position of the valve.</p> <p><u>CROSSLAY HOSE BEDS</u></p> <p>Two (2) crosslays with 1.50" outlets shall be provided. Each bed to be capable of carrying 200 feet of 1.75" double jacketed hose and shall be plumbed with 2.00" i.d. pipe and gated with a 2.00" quarter turn ball valve.</p> <p>Outlets to be equipped with a 1.50" National Standard hose thread 90-degree swivel located so that hose may be removed from either side of apparatus.</p> <p>The crosslay controls shall be at the pump operator's panel.</p> <p>A removable tray shall be provided for each crosslay hosebed. The crosslay trays shall be constructed of black poly to provide a lightweight sturdy tray. Two (2) hand holes shall be in the floor and additional hand holes shall be provided in the sides for easy removal and installation from the compartment. The floor of the trays shall be perforated to allow for drainage and hose drying. The bottom of the crosslay compartments shall be lined with stainless steel to allow the tray to slide with ease. Scuffplates shall be provided on both sides, at the sides and bottom of each opening to protect the paint.</p> <p><u>SPEEDLAY AND DEADLAY HOSE RESTRAINT SIDES</u></p> <p>A heavy black nylon webbing made of 1" nylon strap with a 2" box pattern netting shall be provided on the ends of Speedlay and Deadlay beds to secure the hose during travel.</p> <p>The webbed netting shall be fastened with spring clips at the top with footman loops located on the bottom.</p>		

	Bidder Complies	
	Yes	No
<p><u>FOAM SYSTEM</u></p> <p>A foam system shall not be required on this apparatus.</p> <p><u>PUMP COMPARTMENT</u></p> <p>The pump compartment shall be separate from the hose body and compartments so that each may flex independently of the other. The pump compartment shall be constructed of the same material as the body compartmentation.</p> <p>The pump compartment substructure shall be a fabricated assembly of steel tubing, angles and channels which supports both the fire pump and the side running boards.</p> <p>The pump compartment shall be mounted on the chassis frame rails with rubber biscuits in a four-point pattern to allow for chassis frame twist.</p> <p>Pump compartment, pump, plumbing and gauge panels shall be removable from the chassis in a single assembly.</p> <p><u>PUMP MOUNTING</u></p> <p>Pump shall be mounted to a substructure which shall be mounted to the chassis frame rail using rubber isolators. The mounting shall allow chassis frame rails to flex independently without damage to the fire pump.</p> <p><u>LEFT SIDE PUMP CONTROL PANELS</u></p> <p>All pump controls and gauges shall be located at the left side of the apparatus and properly identified.</p> <p>Layout of the pump control panel shall be ergonomically efficient and systematically organized.</p> <p>The pump operator's control panel shall be removable in two (2) main sections for ease of maintenance:</p> <p>The upper section shall contain sub panels for the mounting of the pump pressure control device, engine monitoring gauges, electrical switches, and foam controls (if applicable). Sub panels shall be removable from the face of the pump panel for ease of maintenance. Below the sub panels shall be located all valve controls and line pressure gauges.</p> <p>The lower section of the panel shall contain all inlets, outlets, and drains.</p> <p>All push/pull valve controls shall have 1/4 turn locking control rods with polished chrome plated zinc tee handles. Guides for the push/pull control rods shall be chrome plated zinc castings securely mounted to the pump panel. Push/pull valve controls shall be capable of locking in any position. The control rods shall pull straight out of the panel and shall be equipped with universal joints to eliminate binding. The linkage from the control rod to the valve shall be stainless steel, this shall not include the clevis ends of the linkage which shall remain anodized steel.</p>		

	Bidder Complies	
	Yes	No
<p><u>IDENTIFICATION TAGS</u></p> <p>The identification tag for each valve control shall be recessed in the face of the tee handle.</p> <p>All discharge outlets shall have color coded identification tags, with each discharge having its own unique color. Color coding shall include the labeling of the outlet and the drain for each corresponding discharge.</p> <p>All line pressure gauges shall be mounted directly above the corresponding discharge control tee handles and recessed within the same chrome plated casting as the rod guide for quick identification. The gauge and rod guide casting shall be removable from the face of the pump panel for ease of maintenance. The casting shall be color coded to correspond with the discharge identification tag.</p> <p>All remaining identification tags shall be mounted on the pump panel in chrome plated bezels.</p> <p>Trim rings shall be installed around all inlets and outlets.</p> <p>The following drawing(s) shall be provided for approval by the customer. The drawing(s) shall be made for up One (01) Truck apparatus and/or similar manufacturer's job number.</p> <p><u>PUMP OPERATOR'S PANEL DRAWING</u></p> <p>A detailed drawing to scale of the pump operator's panel shall be provided for the customer to review. The drawing shall include all the gauges, controls, switching, etc., located on the pump operator's panel. The customer will be allowed to make changes and/or mark-ups to this approval drawing. The fire apparatus manufacturer shall make revisions (If needed) to the drawing per the customer changes and/or mark-ups if the changes are physically possible within a specific product line.</p> <p>The finalized and signed customer approved pump operator's panel drawing shall become part of the contract documents.</p> <p>Due to the way drain(s), bleeder(s), operational/maintenance tag(s) and NFPA required warning tag(s) are placed on pump panel(s), these items will NOT be shown on any pump panel approval drawing(s). These item(s) will be placed on pump panel(s) at the fire apparatus manufacturer discretion.</p> <p><u>REMAINING PUMP PANEL(S)</u></p> <p>Detailed drawing(s) to scale of the remaining pump panel(s) shall be provided for the customer to review. The drawing(s) shall include all the gauges, controls, switching, etc., located on the pump panel(s). The customer will be allowed to make changes and/or mark-ups to these approval drawing(s). The fire apparatus manufacturer shall make revisions (If needed) to the drawing(s) per the customer changes and/or mark-ups if the changes are physically possible within a specific product line.</p>		

	Bidder Complies	
	Yes	No
<p>The finalized and signed customer approved pump panel drawing(s) shall become part of the contract documents.</p> <p>Due to the way drain(s), bleeder(s), operational/maintenance tag(s) and NFPA required warning tag(s) are placed on pump panel(s), these items will NOT be shown on any pump panel approval drawing(s). These item(s) will be placed on pump panel(s) at the fire apparatus manufacturer discretion.</p> <p><u>COLOR CODED TAGS</u></p> <p>A detailed drawing/chart of the colors used on all of the inlet(s) and outlet(s) shall be provided for the customer to review. The customer will be allowed to make changes and/or mark-ups to this approval drawing/chart. The fire apparatus manufacturer shall make revisions (If needed) to the drawing per the customer changes and/or mark-ups as long as the changes are physically possible within a specific product line.</p> <p>The finalized and signed customer approved drawing/chart of the colors shall become part of the contract documents.</p> <p><u>SPECIAL TEXT/VERBIAGE TAGS</u></p> <p>A detailed drawing/chart of the text/verbiage used on all the inlet(s) and outlet(s) shall be provided for the customer to review. The customer will be allowed to make changes and/or mark-ups to this approval drawing/chart. The fire apparatus manufacturer shall make revisions (If needed) to the drawing per the customer changes and/or mark-ups if the changes are physically possible within a specific product line.</p> <p>The finalized and signed customer approved drawing/chart of the text/verbiage shall become part of the contract documents.</p> <p><u>PUMP PANEL CONFIGURATION</u></p> <p>The pump panel configuration shall be arranged and installed in an organized manner that shall provide user-friendly operation.</p> <p><u>PUMP OPERATOR'S PLATFORM</u></p> <p>A pull out, flip down platform shall be provided at the pump operator's control panel.</p> <p>The front edge and the top surface of the platform shall be made of DA finished aluminum with a Morton Cass insert.</p> <p>The platform shall be approximately 13.75" deep when in the stowed position and approximately 22.00" deep when extended. The platform stepping surface shall be 28.00" wide. The platform shall lock in the retracted and the extended position.</p> <p>The platform shall be wired to the "step not stowed" indicator in the cab.</p>		

	Bidder Complies	
	Yes	No
<p><u>PUMP OPERATOR'S PLATFORM PERIMETER LIGHT</u></p> <p>There shall be an On-Scene Solutions, Model Night Stick Access, 20.00" white 12 volt DC LED strip light provided to illuminate the ground area.</p> <p><u>PUMP AND GAUGE PANEL</u></p> <p>The pump and gauge panels shall be constructed of aluminum with a black vinyl finish. A polished aluminum trim molding shall be provided around each panel.</p> <p>The right-side pump panel shall be removable and fastened with recessed chrome plated lift and turn type fasteners.</p> <p><u>PUMP COMPARTMENT LIGHT</u></p> <p>There shall be one (1) Whelen®, Model 3SC0CDCR, 3.00" white 12-volt DC LED light(s) with Whelen, Model 3FLANGEC, flange(s) installed in the pump compartment.</p> <p>There shall be a switch accessible through a door on the pump panel included with this installation.</p> <p>Engine monitoring graduated LED indicators shall be incorporated with the pressure controller.</p> <p><u>THROTTLE READY GREEN INDICATOR LIGHT</u></p> <p>There shall be a green indicator light integrated with the pressure governor and/or engine throttle installed on the pump operators' panel that is activated when the pump is in throttle ready mode.</p> <p><u>OK TO PUMP INDICATOR LIGHT</u></p> <p>There shall be a green indicator light installed on the pump operators' panel that is activated when the pump is in Ok To Pump mode.</p> <p><u>VACUUM AND PRESSURE GAUGES</u></p> <p>The pump vacuum and pressure gauges shall be liquid filled and manufactured by Class 1 Incorporated ©.</p> <p>The gauges shall be a minimum of 4.00" in diameter and shall have white faces with black lettering, with a pressure range of 30.00"-0-600#.</p> <p>Gauge construction shall include a Zytel nylon case with adhesive mounting gasket and threaded retaining nut.</p> <p>The pump pressure and vacuum gauges shall be installed adjacent to each other at the pump operator's control panel.</p> <p>Test port connections shall be provided at the pump operator's panel. One (1) shall be connected to the intake side of the pump, and the other to the discharge manifold of the pump. They shall have 0.25 in. standard pipe thread connections and non-corrosive polished stainless steel or brass plugs. They shall be marked with a label.</p>		

	Bidder Complies	
	Yes	No
<p>This gauge shall include a 10-year warranty against leakage, pointer defect, and defective bourdon tube.</p> <p><u>PRESSURE GAUGES</u></p> <p>The individual "line" pressure gauges for the discharges shall be interlube filled and manufactured by Class 1©.</p> <p>They shall be a minimum of 2.00" in diameter and shall have white faces with black lettering.</p> <p>Gauge construction shall include a Zytel nylon case with adhesive mounting gasket and threaded retaining nut.</p> <p>Gauges shall have a pressure range of 30"-0-400#.</p> <p>The individual pressure gauge shall be installed as close to the outlet control as practical.</p> <p>This gauge shall include a 10-year warranty against leakage, pointer defect, and defective bourdon tube.</p> <p><u>WATER LEVEL GAUGE</u></p> <p>An electric water level gauge shall be incorporated in the pressure controller that registers water level by means of 9 LEDs. They shall be at 1/8 level increments with a tank empty LED. The LEDs shall be a bright type that is readable in sunlight and have a full 180-degree of clear viewing.</p> <p>To further alert the pump operator, the gauge shall have a warning flash when the tank volume is less than 25% and shall have "Down Chasing LEDs when the tank is almost empty.</p> <p>The level measurement shall be ascertained by sensing the head pressure of the fluid in the tank or cell.</p> <p><u>PUMP PANEL ILLUMINATION</u></p> <p>There shall be a stainless-steel light shield installed over the pump operators' panel. This shield shall include three (3) 12-volt DC white LED lights to illuminate the controls, switches, essential instructions, gauges, and instruments necessary for the operation of the apparatus. These lights shall be activated by the pump panel light switch.</p> <p>There shall be two (2) 12-volt DC white LED lights to illuminate the pump panel under the pump operators' panel. These lights shall be activated by the same switch as the lights over the pump operators' panel.</p> <p>There shall be one (1) 12-volt DC white LED light to illuminate the pump panel under the pump operators' panel. This light shall be activated when the pump is in "Ok to Pump" mode.</p> <p>There shall be a light activated above the pump panel light switch when the parking brake is set. This is to afford the operator some illumination when first approaching the control panel.</p>		

	Bidder Complies	
	Yes	No
<p><u>ADDITIONAL LIGHT SHIELD</u></p> <p>An additional light shield shall be provided above passenger's side pump panel. The pump panel shall be illuminated by three (3) LED lights installed under a stainless-steel light shield.</p> <p>The lights shall be operated from a switch on the pump panel.</p> <p><u>AIR HORN SYSTEM</u></p> <p>There shall be two (2) Grover air horns recessed in the front bumper. The horn system shall be piped to the air brake system wet tank utilizing 0.38" tubing. A pressure protection valve shall be installed in-line to prevent loss of air in the air brake system.</p> <p><u>Air Horn Location</u></p> <p>The air horns shall be located on each side of the bumper, inside of the frame rails.</p> <p><u>AIR HORN CONTROL</u></p> <p>The air horns shall be actuated by two (2) foot switches, one (1) located on the officer's side and one (1) on the driver's side.</p> <p><u>ELECTRONIC SIREN</u></p> <p>A Whelen®, Model 295SLSA1, electronic siren with noise canceling microphone shall be provided.</p> <p>This siren to be active when the battery switch is on and that emergency master switch is on.</p> <p>Electronic siren head shall be recessed in the driver side center switch panel.</p> <p>The electronic siren shall be controlled on the siren head only. No horn button or foot switches shall be required.</p> <p><u>SPEAKER</u></p> <p>There shall be one (1) Whelen®, Model SA315P, black nylon composite, 100-watt, speaker with through bumper mounting brackets and polished stainless-steel grille provided. The speaker shall be connected to the siren amplifier.</p> <p>The speaker(s) shall be recessed in the center of the front bumper.</p> <p><u>AUXILIARY MECHANICAL SIREN</u></p> <p>A Federal Q2B® siren shall be furnished.</p> <p>The control solenoid shall be powered up after the emergency master switch is activated.</p> <p>The mechanical siren shall be mounted recessed in the front grille. The siren mounting shall include a reinforcement plate.</p> <p>The mechanical siren shall be actuated by two (2) foot switches, one (1) located on the officer's side and one (1) on the driver's side.</p>		

	Bidder Complies	
	Yes	No
<p>A momentary chrome push button switch shall be included in the right-side dash panel to activate the siren brake.</p> <p><u>FRONT ZONE UPPER WARNING LIGHTS</u></p> <p>There shall be one (1) 81.00" Whelen® Freedom™ IV lightbar mounted on the cab roof.</p> <p>The lightbar shall include the following:</p> <ul style="list-style-type: none"> • One (1) red flashing LED module in the driver's side end position. • One (1) red flashing LED module in the driver's side front corner position. • One (1) red flashing LED module in the driver's side first front position. • One (1) red flashing LED module in the driver's side second front position. • One (1) white flashing LED module in the driver's side third front position. • One (1) red flashing LED module in the driver's side fourth front position. • One (1) red flashing LED module in the driver's side fifth front position. • One (1) red flashing LED module in the driver's side sixth front position. • One (1) white flashing LED module in the driver's side seventh front position. • One (1) white flashing LED module in the passenger's side seventh front position. • One (1) red flashing LED module in the passenger's side sixth front position. • One (1) red flashing LED module in the passenger's side fifth front position. • One (1) red flashing LED module in the passenger's side fourth front position. • One (1) white flashing LED module in the passenger's side third front position. • One (1) red flashing LED module in the passenger's side second front position. • One (1) red flashing LED module in the passenger's side first front position. • One (1) red flashing LED module in the passenger's side front corner position. • One (1) red flashing LED module in the passenger's side end position. <p>There shall be clear lenses included on the lightbar.</p> <p>There shall be a switch installed in the cab on the switch panel to control this lightbar.</p> <p>The white flashing LED modules in the front positions shall be deactivated when the parking brake is applied.</p> <p>The red flashing LED modules in the front positions may be load managed when the parking brake is applied.</p> <p><u>ADDITIONAL WARNING LIGHTS</u></p> <p>There shall be two (2) Whelen®, Model M6**, 4.31" high x 6.75" wide x 1.37" deep flashing LED warning light(s) with chrome trim located on the sides of the basket per the following:</p> <ul style="list-style-type: none"> • One (1) light to be installed on the left side of the basket in the lower forward position • One (1) light to be installed on the right side of the basket in the lower forward position • The light(s) to include red flashing LEDs and the warning light lens color(s) to be clear 		

	Bidder Complies	
	Yes	No
<p>The light(s) shall be controlled per the following:</p> <ul style="list-style-type: none"> • A switch in the cab on the switch panel shall control the lights • Amber, blue, or red LEDs may be load managed when the parking brake is applied <p><u>SIDE WARNING LIGHTS</u></p> <p>There shall be two (2) 21.50" Whelen Freedom IV LED lightbars mounted on the roof, one (1) on each side, over the crew cab doors.</p> <p>The driver's side lightbar shall include the following:</p> <ul style="list-style-type: none"> • One (1) red flashing LED module in the outside end position. • One (1) red flashing LED module in the outside front corner position. • One (1) white flashing LED module in the outside front position. • One (1) red flashing LED module in the inside front position. • One (1) red flashing LED module in the inside front corner position. <p>The passenger's side lightbar shall include the following:</p> <ul style="list-style-type: none"> • One (1) red flashing LED module in the inside front corner position. • One (1) red flashing LED module in the inside front position. • One (1) white flashing LED module in the outside front position. • One (1) red flashing LED module in the outside front corner position. • One (1) red flashing LED module in the outside end position. <p>There shall be clear lenses included on the lightbar.</p> <p>There shall be a switch in the cab on the switch panel to control the lightbars.</p> <p>The white LED's shall be disabled when the parking brake is applied.</p> <p>The two (2) red flashing LED modules in the inside front positions and the two (2) red flashing LED modules in the inside front corner positions may be load managed when the parking brake is applied.</p> <p><u>CAB FACE WARNING LIGHTS</u></p> <p>There shall be four (4) Whelen®, Model M6*C, LED flashing warning lights installed on the cab face, above the headlights, mounted in a common bezel.</p> <ul style="list-style-type: none"> • The driver's side front outside warning light to be red • The driver's side front inside warning light to be red • The passenger's side front inside warning light to be red • The passenger's side front outside warning light to be red <p>All four (4) lights shall include a clear lens.</p>		

	Bidder Complies	
	Yes	No
<p>There shall be a switch located in the cab, on the switch panel, to control the four (4) lights.</p> <p>The inside lights may be load managed if colored or disabled if white, when the parking brake is set.</p> <p><u>HEADLIGHT FLASHER</u></p> <p>The high beam headlights shall flash alternately between the left and right side.</p> <p>There shall be a switch installed in the cab on the switch panel to control the high beam flash. This switch shall be live when the battery switch and the emergency master switches are on.</p> <p>The flashing shall automatically cancel when the hi-beam headlight switch is activated or when the parking brake is set.</p> <p><u>SIDE ZONE LOWER LIGHTING</u></p> <p>There shall be six (6) Whelen®, Model M6*C, flashing LED warning lights with chrome trim installed per the following:</p> <ul style="list-style-type: none"> • Two (2) lights, one (1) each side on the bumper extension. The side front lights to be red. • Two (2) lights, one (1) each side of cab rearward of crew cab doors. The side middle lights to be red. • Two (2) lights, one (1) each side located between the tandems. The side rear lights to be red. • The lights shall include clear lenses. <p>There shall be a switch in the cab on the switch panel to control the lights.</p> <p><u>INTERIOR CAB DOOR WARNING LIGHTS</u></p> <p>There shall be four (4) Weldon, Model 8401-0000-20, amber 12-volt DC LED flashing strip lights provided.</p> <ul style="list-style-type: none"> • One (1) light on the driver's side cab door over the window. • One (1) light on the passenger's side cab door over the window. • One (1) light on the passenger's side crew cab door over the window. • One (1) light on the driver's side crew cab door over the window. <p>Each light shall be activated when the battery switch is on and the adjacent door is opened.</p> <p>Each light shall be installed so the flash pattern directs traffic away from the doors.</p> <p><u>SIDE WARNING LIGHTS</u></p> <p>There shall be four (4) Whelen®, Model I2SM#, 1.68" high x 5.93" long x 1.12" deep flashing LED warning lights provided in rub rail under LS1 rearward, LS4 centered, RS1 rearward, and RS5 centered.</p>		

	Bidder Complies	
	Yes	No
<p>The color of the lights shall be side light(s) to include red and white LEDs with clear lenses and black trim.</p> <p>These lights shall be activated with the lower side zone warning switch in the cab.</p> <p>Colored LEDs may be load managed or white LEDs shall be disabled when the parking brake is applied.</p> <p><u>REAR ZONE LOWER LIGHTING</u></p> <p>There shall be two (2) Whelen®, Model M6*C, LED flashing warning lights located at the rear of the apparatus.</p> <ul style="list-style-type: none"> • The driver's side rear light to be red • The passenger's side rear light to be red <p>Both lights shall include a lens that is clear.</p> <p>There shall be a switch located in the cab on the switch panel to control the lights.</p> <p><u>REAR WARNING LIGHTS</u></p> <p>There shall be two (2) Whelen®, Model M6**, 4.31" high x 6.75" wide x 1.37" deep flashing LED warning light(s) with chrome trim provided at the rear of the apparatus, above taillights.</p> <p>The light(s) to include red flashing LEDs. The warning light lens color(s) to be clear.</p> <p>These light(s) shall be controlled with the rear upper warning switch.</p> <p>The light(s) may be load managed when the parking brake is applied.</p> <p><u>REAR/SIDE ZONE UPPER WARNING LIGHTS</u></p> <p>There shall be two (2) Whelen®, Model L31H*FN, LED warning beacons provided at the rear of the truck, located one (1) each side. There shall be a switch located in the cab on the switch panel to control the beacons.</p> <p>The color of the lights shall be red LEDs with both domes clear.</p> <p><u>REAR BODY MOUNTING BRACKET</u></p> <p>There shall be a 5.00" deep aluminum treadplate bracket provided at the rear of the body, spanning the width of the rear compartment door. The bracket(s) shall be provided to mount lights, cameras, or other accessories. The brackets shall include a removable panel to protect the wire connections.</p> <p><u>TRAFFIC DIRECTING LIGHT</u></p> <p>There shall be one (1) Whelen®, Model TAL65, 36.00" long x 2.87" high x 2.25" deep, amber LED traffic directing light installed at the rear of the apparatus.</p> <p>The Whelen, Model TACTL5, control head shall be included with this installation.</p>		

	Bidder Complies	
	Yes	No
<p>The controller shall be energized when the battery switch is on.</p> <p>The auxiliary flash to be activated when the emergency master switch is on.</p> <p>This traffic directing light shall be surface mounted over the rear door, inside a treadplate box at the rear of the apparatus as high as practical.</p> <p>The traffic directing light control head shall be located in the driver side overhead switch panel in the right panel position.</p> <p><u>120 VOLT RECEPTACLES</u></p> <p>There shall be two (2), 15/20-amp 120-volt AC three (3) wire straight blade duplex receptacle(s) with interior stainless steel wall plate(s), installed Upper center on back wall of EMS cabinet in crew cab. The NEMA configuration for the receptacle(s) shall be 5-20R.</p> <p>The receptacle(s) shall be powered from the shoreline inlet.</p> <p>There shall be a label installed near the receptacle(s) that state the following:</p> <ul style="list-style-type: none"> • Line Voltage • Current Rating (amps) • Phase • Frequency • Power Source <p><u>120 VOLT RECEPTACLE</u></p> <p>There shall be one (1), 15/20-amp 120-volt AC three (3) wire straight blade duplex receptacle(s) with interior stainless steel wall plate(s), installed Upper right forward corner of the RS2 compartment as high as possible. The NEMA configuration for the receptacle(s) shall be 5-20R.</p> <p>The receptacle(s) shall be powered from the shoreline inlet.</p> <p>There shall be a label installed near the receptacle(s) that state the following:</p> <ul style="list-style-type: none"> • Line Voltage • Current Rating (amps) • Phase • Frequency • Power Source <p><u>120 VOLT RECEPTACLE</u></p> <p>There shall be one (1), 15/20-amp 120-volt AC three (3) wire straight blade duplex receptacle(s) with an interior stainless-steel wall plate, installed Upper right forward corner of the RS3 compartment as high as possible. The NEMA configuration for the receptacle(s) shall be 5-20R.</p> <p>The receptacle(s) shall be powered from the shoreline inlet.</p>		

	Bidder Complies	
	Yes	No
<p>There shall be a label installed near the receptacle(s) that state the following:</p> <ul style="list-style-type: none"> • Line Voltage • Current Rating (amps) • Phase • Frequency • Power Source <p><u>AERIAL GENERAL INFORMATION</u></p> <p>It is the intent of these specifications to describe a mid-mounted telescoping, elevating platform. The unit shall consist of a five (5) section, steel ladder with a self-leveling basket attached to the ladder fly section.</p> <p><u>Operation on Grades</u></p> <p>The aerial unit shall be capable of operating safely, on any slope up to 10 degrees at full capacities. (Operation beyond this limit shall be at the operator's discretion).</p> <p><u>Construction Standards</u></p> <p>The ladder shall be constructed to meet all the requirements as described in the current edition of NFPA 1901.</p> <p>These capabilities shall be established in an unsupported configuration.</p> <p>All structural load supporting elements of the aerial device that are made of a ductile material shall have a design stress of not more than 50 percent of the minimum yield strength of the material based on the combination of the live load and the dead load. This 2:1 structural safety factor meets the current NFPA 1901 standard.</p> <p>All structural load supporting elements of the aerial device that are made of non-ductile material shall have a design stress of not more than 20 percent of the minimum ultimate strength of the material, based on the combination of the rated capacity and the dead load. This 5:1 safety factor meets the current 1901 NFPA standard.</p> <p>The aerial device shall be capable of sustaining a static load one and one-half times its rated tip load capacity (live load) in every position in which the aerial device can be placed when the vehicle is on a firm level surface.</p> <p>The aerial device shall be capable of sustaining a static load one and one-third times its rated tip load capacity (live load) in every position the aerial device can be placed when the vehicle is on a slope of five degrees downward in the direction most likely to cause overturning.</p> <p>With the aerial device out of the cradle in the in the fully extended position at zero degrees elevation, a test load shall be applied in a horizontal direction normal to the centerline of the ladder. The turntable shall not rotate, and the ladder shall not deflect beyond what the product specification allows.</p>		

	Bidder Complies	
	Yes	No
<p>All welding shall be in compliance with the American Welding Society standards. All welding personnel shall be certified, as qualified under AWS welding codes.</p> <p>The aerial device shall be capable of operating in either of the two (2) following conditions:</p> <ul style="list-style-type: none"> • Conditions of high wind up to 35 mph • Conditions of icing, up to a coating of 0.25" over the entire aerial structure <p>All of the design criteria must be supported by the following test data:</p> <ul style="list-style-type: none"> • Strain gage testing of the complete aerial device <p>The following criteria for materials are to be used in the design of the aerial device:</p> <ul style="list-style-type: none"> • Materials are to be certified by the mill that manufactured the material • Material testing that is performed after the mill test shall be for verification only and not with the intent of changing the classification. <p><u>Ladder Construction</u></p> <p>The ladder shall be comprised of five (5) sections and shall extend to a nominal height, of 100' above the ground, as measured by 1901 recommendations. The ladder (handrails, base rails, trusses, k-braces, and rungs) shall be constructed of welded, high strength steel certified by the manufacturer as being a minimum of 100,000 lb per square inch of yield strength. All critical points shall be reinforced, for extra rigidity, and to provide a high strength-to-weight ratio. Ladder rungs shall be round and welded to each section in two (2) places with "K" bracing for torsional rigidity. A minimum of 70.25" of overlap between each of the aerial sections shall be provided.</p> <p>The inside width dimensions of the ladder shall be:</p> <p>Base Section: 56.12" Lower Mid Section: 46.12" Center Mid Section: 36.62" Upper Mid Section: 28.12" Fly Section: 22.12"</p> <p>The height of the handrails above the centerline of the rungs shall be:</p> <p>Base Section: 40.72" Lower Mid Section: 39.08" Center Mid Section: 32.32" Upper Mid Section: 29.02" Fly Section: 26.37"</p>		

	Bidder Complies	
	Yes	No
<p><u>Vertical Height</u> The height of the unit shall extend to no less than 100', as measured by a plumb line from the top surface of the basket handrail assembly to the ground, with the basket raised to a 77-degree angle.</p> <p><u>Horizontal Reach</u> The rated horizontal reach shall be 93'. The measurement of horizontal reach shall be consistent with NFPA standards.</p> <p><u>Mounting of Elevating Platform</u> The aerial device shall be mid mounted, to a torque box, on the truck chassis.</p> <p><u>Torque Box</u> A "torsion box" subframe shall be installed between two sets of stabilizers. The torque box shall be constructed of 100,000 lb per square inch yield steel with an integral ladder storage box. The torque box assembly shall be capable of withstanding all torsional and horizontal loads when the unit is on the stabilizers. The torque box shall be bolted to the chassis frame rails using forty-eight 0.750" SAE grade 8 bolts with nuts.</p> <p><u>Turntable</u> The turntable shall be coated with a non-skid, chemical resistant material in the walking areas. The stepping surfaces shall meet the skid-resistance requirements in the current NFPA 1901 standard. The turntable shall serve as a step for access to the ladder. The turntable handrails shall be a minimum 42.00" high and shall not increase the overall travel height of the vehicle. The handrails shall be constructed from 1.62" diameter extruded 6061-T6 aluminum with a slip resistant knurled surface. The handrails shall be anodized to resist corrosion.</p> <p><u>Elevation System</u> Two (2) double acting, lift cylinders shall be utilized to provide smooth, precise elevation from 15 degrees below horizontal to 77 degrees above horizontal. The lift cylinder shall be attached to each side of the base section. The lift cylinders shall have a 7.50" internal diameter (bore), 3.50" diameter cylinder rod and a 53.89" stroke. The lift cylinder rod shall be chrome plated, to provide smooth operation of the aerial and reduce seal wear. The lift cylinders shall be equipped with integral holding valves located in the cylinder, to prevent the unit from descending should the charged lines be severed, at any point within the hydraulic system and to maintain the ladder in the bedded position during road travel. The integral holding valves shall NOT be in the transfer tubes. The elevation system shall be controlled by the microprocessor. The microprocessor shall provide the following features:</p>		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> Collision avoidance of the elevation system to prevent accidental body damage Automatic deceleration when the aerial device is lowered into the cradle Automatic deceleration at the end of stroke, in maximum raise and lower positions Deceleration of the aerial device from 0 to -15 degrees <p><u>Extension/Retraction System</u></p> <p>A hydraulically powered, extension and retraction system shall be provided through dual hydraulic cylinders and wire ropes. The extension cylinder shall have a 6.50" internal diameter (bore), 2.75" diameter rod and a 53.12" stroke. Each set shall be capable of operating the ladder in the event of a failure, of the other. For safety, systems that use only a single extension/retraction system shall not be acceptable. The extension cylinder rod shall be chrome plated to provide smooth operation of the aerial device and reduce seal wear. The extension/retraction cylinders shall be equipped, with integral holding valves, to prevent the unit from retracting should the charged line be severed, at any point within the hydraulic system. The integral holding valves shall NOT be in the transfer tubes.</p> <p>Wire ropes and attaching systems used to extend and retract the fly sections shall have a 5:1 safety factor based on the ultimate strength under all operating conditions. The factor of safety for the wire rope shall remain above 2:1 during any extension or retraction stall. The minimum ratio of the diameter of wire rope used to the diameter of the sheave used shall be 1:12. Wire ropes shall be constructed of seven (7) strands over an inner wire core for increased flexibility. The wire rope shall be galvanized to reduce corrosion.</p> <p>The extension/retraction system shall be controlled by the microprocessor. The microprocessor shall provide the following features:</p> <ul style="list-style-type: none"> Automatic deceleration at the end of stroke, in maximum extend and retract positions Controls the rate of retraction while flowing water <p>All sheaves and sheave pins shall utilize greasable bronze bushings. Sheave pins shall be polished stainless steel (no exception).</p> <p><u>Rotation System</u></p> <p>A 54.00" diameter, external tooth, monorace rotation bearing shall be used for the rotation system and shall provide 360-degree continuous rotation. The turntable shall be bolted to the bearing using 30 SAE grade 8, 0.875" diameter bolts. To secure the bearing to the base support, 36 grade 8, 0.875" diameter bolts shall be used. The turntable base and the torque box bearing plate shall be machined to fit the bearing, thereby providing even distribution of forces. Two (2) hydraulically driven, planetary gear boxes, with drive speed reducer, shall be used to provide infinite and minute rotation control, throughout the entire rotational travel. Each planetary gearbox has a torque rating of 130,000 lb per square inch. A spring applied, hydraulically released, disc type, swing brake shall be furnished to provide positive braking of the turntable assembly. Provisions shall be made for auxiliary operation of the rotation system should complete loss of normal hydraulic power occur.</p>		

	Bidder Complies	
	Yes	No
<p>The rotation system shall be controlled by the microprocessor. The microprocessor shall provide the following features:</p> <ul style="list-style-type: none"> • Envelope control of rotation system to prevent accidental body damage • Prevent the aerial from being rotated into the short-jacked side of the unit <p><u>Manual Override Controls</u> Manual override controls shall be provided for all aerial and stabilizer functions.</p> <p><u>Ladder Slide Mechanism</u> Wear pads shall be used between the telescoping ladder sections, to reduce friction for smoother operation. Slide pads shall also be used to control side play between the ladder sections.</p> <p><u>Basket Leveling System</u> A basket leveling system shall be provided and so designed, that the basket with it's rated load, can be supported and maintained level, relative to the turntable, regardless of the elevation or flexion of the ladder.</p> <p>The leveling of the basket features a hydraulic cylinder system mounted between the ladder fly section and the basket with each side capable of supporting the load, while maintaining the basket level.</p> <p>The hydraulic circuitry includes pressure operated counterbalance valves, on the load side of the cylinders, to prevent the basket from tipping should the hydraulic lines be severed.</p> <p>The microprocessor shall control the level of the basket during bedding operations, preventing the basket from hitting the body deck when the truck is setup on unlevel ground.</p> <p><u>Rotation Interlock</u> The microprocessor shall be used to prevent the rotation of the aerial device, to the side in which the stabilizers have not been fully deployed (short-jacked). The microprocessor shall allow full and unrestricted use of the aerial, in the 180-degree area, on the side(s) where the stabilizers have been fully deployed. The system shall also have a manual override, to comply with NFPA 1901. SYSTEMS THAT PERMIT THE AERIAL TO ROTATE TO THE "SHORT JACK" SIDE, WITHOUT AUTOMATICALLY STOPPING THE ROTATION AND/OR WITHOUT ACTUATION OF THE "MANUAL OVERRIDE", SHALL NOT BE ACCEPTED. SYSTEMS THAT ONLY INCLUDE AN ALARM ARE NOT CONSIDERED AN INTERLOCK AND SHALL NOT BE ACCEPTED.</p> <p><u>Load Capacities</u> The following load capacities shall be established with the stabilizers at full horizontal extension and placed in the down position to level the truck and to relieve the weight from the tires and axles. Capacities shall be based upon full extension and 360-degree rotation.</p>		

Bidder Complies	
Yes	No

A load chart, visible at the operator's station, shall be provided. The load chart shall show the recommended safe load at any condition of the aerial device's elevation and extension (no exception).

35 MPH Wind Conditions/Dry

Degree of Elevation	-15 to 9	10 to 19	20 to 29	30 to 39	40 to 49	50 to 59	60 to 77
Basket	1000	1000	1000	1000	1000	1000	1000
Fly	-	-	-	-	250	250	500
Upper Mid	-	-	-	-	250	250	500
Center Mid	-	-	250	250	250	500	500
Lower Mid	-	-	250	250	500	500	500
Base	-	250	500	500	500	500	750

Water Tower Operation

The following capacities shall be based upon continuous 360-degree rotation and full extension.

35 MPH Wind Conditions/Water Charged

Degree of Elevation	-15 to 9	10 to 19	20 to 29	30 to 39	40 to 49	50 to 59	60 to 77
Basket	500	500	500	500	500	500	500
Fly	-	-	-	-	-	-	250
Upper Mid	-	-	-	-	-	250	250
Center Mid	-	-	-	-	250	250	500
Lower Mid	-	-	-	250	250	500	500
Base	-	-	250	250	250	500	500

Elevation -15 to 77 Degrees

The aerial device shall be able to maintain the above load capacities while flowing up to 1500 GPM and a nozzle position of 0 to 90 degrees to either side of the ladder centerline, and as far above and below horizontal to the platform as nozzle design allows.

The aerial device shall be able to maintain the above load capacities while flowing up to 2000 GPM and a nozzle position of 0 to 45 degrees to either side of the ladder centerline, and 30 degrees above horizontal and as far below horizontal to the platform as nozzle design allows.

Reduced loads in the basket can be redistributed in 250 lb Increments to the fly, mid, or base as needed.

Ladder Cradle Interlock System

A ladder cradle interlock system shall be provided through the microprocessor to prevent the lifting of the aerial device from the nested position until the operator places all the stabilizers in a load supporting configuration. A switch shall be installed at the boom support to prevent operation of the stabilizers once the aerial has been elevated from the nested position.

	Bidder Complies	
	Yes	No
<p><u>AERIAL BOOM PANEL</u></p> <p>There shall be one boom panel provided on each side of the aerial ladder base section. The boom panel shall be painted #90 red.</p> <p>There shall be two (2) holes in the face of the boom panel on each side to grease the extension cylinder sheave pins for required maintenance.</p> <p><u>AERIAL DEVICE RUNG COVERS</u></p> <p>Each rung shall be covered with a secure, heavy-duty, fiberglass pultrusion that incorporates an aggressive, no-slip coating.</p> <p>The rung covers shall be glued to each rung and shall be easily replaceable should the rung cover become damaged.</p> <p>The center portion of each rung cover shall be black and the outside 2.00" edge at each side shall be black.</p> <p>Under no circumstances shall the rung covers be fastened to the rungs using screws or rivets (no exception).</p> <p>The rung covers shall have a 10-year, limited warranty.</p> <p><u>STOKES STORAGE BRACKETS</u></p> <p>There shall be one (1) aluminum bracket(s) provided at the base section of the aerial ladder on the right side of the aerial device while viewed from the turntable. The brackets shall be located above the aerial boom panel. The brackets shall be painted to match the aerial device and include locking pins to secure the basket.</p> <p><u>STABILITY TEST</u></p> <p>An aerial stability test shall be run on this apparatus using the maximum weight allowance for tip options.</p> <p><u>SAW STORAGE BOX</u></p> <p>There shall be a total of two (2) storage box(es) provided at the base section of the aerial ladder, one (1) on each side of the aerial device. The box(es) shall be painted to match the aerial device and located at the tip of the base section. The box(es) shall have a hinged cover with D-handle latch and two (2) gas struts to secure the saw. The cover shall have the same finish as the box. The box shall have no louvers.</p> <p>The maximum capacity of each box shall be 25 lb.</p> <p><u>LADDER STORAGE MOUNTING BRACKETS</u></p> <p>There shall be brackets that are painted to match the aerial device provided near the end of the fly section of the aerial for mounting a roof ladder.</p>		

	Bidder Complies	
	Yes	No
<p>The mounting brackets shall accommodate a 16' Duo-Safety 875-DR roof ladder as determined by the type of aerial device and the available space.</p> <p><u>BASKET STRUCTURE</u></p> <p>The complete basket structure shall be constructed of welded high strength steel certified by the manufacturer to have a minimum of 100,000 lb per square inch yield strength on all structural members. The aerial basket shall be fully tested and independent third party certified.</p> <p>The flooring of the basket shall be multi-piece Morton Cass material, preventing the accumulation of water on the standing surface. The floor shall measure approximately 33.63" long x 72.75" wide. The stepping surfaces shall meet the skid-resistance requirements of current NFPA 1901 standard.</p> <p>The outside basket steps used for transferring in and out of the basket shall be at the same level as the basket floor and shall be constructed of aluminum treadplate. The steps on the front and sides are approximately 8.00" deep. The front corners of the basket step shall be mitered at 45 degrees to allow the basket to be maneuvered closer to buildings when approaching at an angle.</p> <p>Four (4) stainless steel pompier belt safety loops shall be attached to the inside of the basket. Two (2) lifting eyes shall be provided on the bottom side of the basket support structure.</p> <p>Four (4) rubber bumpers are provided on the bottom side of the basket structure for damage protection when setting it down on a surface.</p> <p>The basket interior shall be illuminated as required per the current edition of NFPA 1901. Electrical sub-components shall be mounted under the basket in a enclosed area providing protection from heat exposure while allowing for easy servicing and maintaining an unobstructed basket interior.</p> <p><u>BASKET SIDES</u></p> <p>The sides of the basket shall be of tubular steel construction and aluminum sheet skin, and along with the basket doors, shall form a continuous 42.00" high wall around the basket.</p> <p><u>PLATFORM ENTRANCES/EXITS</u></p> <p>Two (2) swing-in, spring-loaded, self-closing doors shall be of steel frame construction with an aluminum sheet skin and shall be provided on the 45-degree angles at the front of the platform. A paddle style door latch shall allow the basket doors to be opened from the outside by applying pressure to the paddle with the hand. The rear of the platform shall be equipped with a vertical self-closing gate for transfer to and from the platform's ladder device.</p> <p><u>ACCESSORY MOUNTING RECEPTACLES</u></p> <p>Universal accessory mounting receptacles shall be permanently affixed on the left side of the basket to receive options such as the rescue basket holders, rappelling arms, roof ladder</p>		

	Bidder Complies	
	Yes	No
<p>brackets, winch, etc. Complete interchangeability shall be required without modification to the basket.</p> <p><u>AXE MOUNTING BRACKETS</u></p> <p>Brackets shall be provided in the aerial platform basket for mounting one (1) fire axe(s). The type of axe mounted here shall be a flathead axe. The mounting plates for this installation shall be stainless steel.</p> <p><u>HOSE BOX AT PLATFORM</u></p> <p>There shall be one (1) hose storage box(es) with a cover and SouthCo stainless steel draw latch provided at the platform. A brushed stainless steel scuffplate shall be provided under each latch. The box(es) shall be located at the right side of the basket when viewed from the turntable and shall match the finish of the aerial device. The box(es) shall be sized to fit 100' of 1.75" diameter hose.</p> <p>Drain holes shall be provided in the bottom corners of each box and a louver shall be provided on each side near the top of the box, below the latches.</p> <p><u>BASKET DOOR SCUFFPLATES</u></p> <p>There shall be scuffplates applied to the exterior of each basket entrance door. Scuffplates shall cover half of the height of the doors. The scuffplates shall be made of brushed stainless steel.</p> <p><u>LIGHTS FOR TURNTABLE WALKWAY</u></p> <p>There shall be On Scene Model 73006-WHW 6.00" long white LED lights and P25 white LED lights provided at the aerial turntable. The lights shall be located to illuminate the entire walking surface of the turntable including the area around the turntable console. These lights shall be activated by the aerial master switch.</p> <p><u>TURNTABLE CONSOLE LIGHTING</u></p> <p>There shall be one (1), TecNiq Model E10, white LED light mounted in the turntable console cover to illuminate the controls located on both the upper and lower portion of the turntable control station. These lights shall be activated by the aerial master switch.</p> <p><u>BASKET HEAT SHIELDS</u></p> <p>A heat reflective shield, constructed of 0.063 aluminum shall be provided on the front, sides, bottom, and access doors of the basket.</p> <p>These heat shields shall be painted to match the aerial device.</p> <p>The heat shields on the bottom of the basket shall be easily removable for ease of servicing components located under the basket.</p>		

	Bidder Complies	
	Yes	No
<p><u>INFORMATION CENTER</u></p> <p>There shall be an information center provided. The information center shall operate in temperatures from -40 to 185 degrees Fahrenheit. The information center shall employ a Linux operating system and a 7.00" (diagonal measurement) LCD display. The LCD shall have a 1000 nits rated color display. The LCD shall be daylight visible. The LCD display shall be encased in an ABS, grey plastic housing with a black decal. There shall be five (5), weather-resistant user interface buttons provided. The LCD display can be changed to an optional single foreign language.</p> <p><u>Operation</u></p> <p>The information center shall be designed for easy operation in everyday use. There shall be a page button to cycle from one screen to the next screen in a rotating fashion. A video button shall allow an NTSC camera signal into the information center to be displayed on the LCD. If any button is pressed while viewing a video feed, the information center shall return to the vehicle information screens. There shall be a menu button to provide access to maintenance, setup, and diagnostic screens. All other button labels shall be specific to the information being viewed.</p> <p><u>General Screen Design</u></p> <p>Where possible, background colors shall be used to provide vehicle information <i>At A Glance</i>. If the information provided on a screen is within acceptable limits, a green background color shall be used. If the information provided on a screen is not within acceptable limits, an amber background color shall indicate a caution condition and a red background color shall indicate a warning condition.</p> <p>Every screen in the information center shall include the aerial tip temperature, the time (12- or 24-hour mode) and a text Alert Center. The time shall be synchronized between all Command Zone color displays located on the vehicle. The Alert Center shall display text messages for audible alarms. The text messages shall identify any items causing the audible alarm to sound. If more than one (1) audible alarm is activated, the text message for each alarm shall cycle every second until the problems have been resolved. The background for the Alert Center shall change to indicate the severity of the warning message. Amber shall indicate a caution condition and red shall indicate a warning condition. If a warning and a caution condition occur simultaneously, the red background color shall be shown for all Alert Center messages.</p> <p>A label shall be provided for each button. The label shall indicate the function for each active button for each screen. If the button is not utilized on specific screens, it shall have a button label with no text.</p> <p>Symbols shall accurately depict the aerial device type the information pertains to such as rear mount ladder, rear mount platform, mid-mount ladder or mid-mount platform.</p> <p><u>Page Screens</u></p> <p>The Information center shall include the following pages:</p>		

	Bidder Complies	
	Yes	No
<p>The Aerial Main and Load Chart page shall indicate the following information:</p> <p>Rungs Aligned and Rungs Not Aligned shall be indicated with text and respective green or red colored ladder symbols.</p> <p>Ladder Elevation shall be indicated via a fire apparatus vehicle with ladder symbol with the degree of elevation indicated between the vehicle and ladder.</p> <p>Water Flow (if applicable) shall be indicated via a water nozzle symbol and text indicating flow / time.</p> <p>Breathing Air Levels shall be indicated via an air bottle symbol and text indicating the percent (%) of air remaining. A green bar graphs shown inside the bottle shall indicate oxygen levels above 20 percent. A red bar graph shall indicate oxygen levels at or below 20 percent. When oxygen levels are at or below 10 percent the red bar graph shall flash.</p> <p>The Aerial Load Chart shall indicate the load limit on each section of the ladder based on actual ladder position and water flow (if applicable).</p> <p><i>At A Glance</i> color features shall be utilized on this screen. Caution type conditions shall be indicated via a yellow background. Warning type conditions shall be indicated via a red background. Conditions operating within acceptable limits shall be indicated via a green background.</p> <p>The Aerial Reach and Hydraulic Systems page shall indicate the following information:</p> <p>Aerial Hydraulic Oil Temperature shall be indicated with symbol and text. At a glance features shall be utilized.</p> <p>Aerial Hydraulic Oil Pressure shall be indicated with a symbol and text. At a glance features shall be utilized.</p> <p>The following calculations shall be indicated on a representative vehicle symbol:</p> <p>Aerial Device Extension length.</p> <p>Aerial Device Height indicating the height of the aerial device tip from the ground.</p> <p>Aerial Device Reach indicating the horizontal distance the aerial reaches from the turntable.</p> <p>Aerial Device Angle indicating the angle from the vehicle which the device is at.</p> <p><i>At A Glance</i> color features shall be utilized on this screen. Caution type conditions shall be indicated via a yellow background. Warning type conditions shall be indicated via a red background. Conditions operating within acceptable limits shall be indicated via a green background.</p>		

	Bidder Complies	
	Yes	No
<p>The Level Vehicle page shall indicate the following information:</p> <p>The grade of the vehicle shall be indicated via a fire apparatus vehicle symbol with the degree of grade shown in text format. The symbol shall tilt dependent on the vehicle grade.</p> <p>The slope of the vehicle shall be indicated via a fire apparatus vehicle symbol with the degree of slope shown in text format. The symbol shall tilt dependent on the vehicle slope.</p> <p>Outriggers status shall be indicated via a colored symbol for each outrigger present. Each outrigger status shall be defined as one of the following:</p> <p>Outrigger stowed indicated with a silver pan located close to the vehicle</p> <p>Outrigger fully extended indicated with a fully deployed green outrigger</p> <p>Outrigger short-jacked indicated by a yellow outrigger partially deployed</p> <p>Outrigger not set indicated by a red outrigger that is not set on the ground</p> <p>A text box located on the vehicle symbol shall be utilized to identify the overall status of the outrigger leveling system. The following status shall be indicated in the text box:</p> <p>Deployed status shall indicate all outriggers are properly set on the ground at full extension</p> <p>Shortjacked status shall indicate one or more outriggers are set on the ground but not fully extended.</p> <p>Not Set status shall indicate one or more outriggers is not properly set on the ground.</p> <p>Stowed status shall indicate all outriggers are stowed for vehicle travel.</p> <p>A bedding assist alert shall indicate that the aerial device is being aligned by the Command Zone system as the operator lowers the aerial device into the cradle with the joystick.</p> <p><i>At A Glance</i> color features shall be utilized on this screen. Caution type conditions shall be indicated via a yellow background. Warning type conditions shall be indicated via a red background. Conditions operating within acceptable limits shall be indicated via a green background.</p> <p><u>Menu Screens</u></p> <p>The following screens shall be available through the Menu button:</p> <p>The View System Information screen shall display aerial device hours, aerial PTO hours, ladder aligned for stowing, aerial rotation angle, total water flow (if applicable), and aerial waterway valve status (if applicable).</p> <p>The Set Display Brightness screen shall allow brightness increase and decrease and include a default setting button.</p>		

	Bidder Complies	
	Yes	No
<p>The Configure Video Mode screen shall allow setting of video contrast, video color and video tint.</p> <p>The Set Startup screen allows setting of the screen that shall be active at vehicle power-up.</p> <p>The Set Date and Time screen has a 12- or 24-hour format and allows setting of the time and date.</p> <p>The View Active Alarms screen shows a list of all active alarms including the date and time of each alarm occurrence and shows all alarms that are silenced.</p> <p>The System Diagnostics screen allows the user to view system status for each module and it's respective inputs and outputs. Viewable data shall include the module type and ID number; the module version; and module diagnostics information including input or output number, the circuit number connected to that input or output, the circuit name (item connected to the circuit), status of the input or output, and other module diagnostic information.</p> <p>Aerial calibrations screen indicates items that may be calibrated by the user and instructions to follow for proper calibration of the aerial device.</p> <p>Button functions and button labels may change with each screen.</p> <p><u>LOWER CONTROL STATION</u></p> <p>A lower control station with pendant control shall be located at the rear of the apparatus in an easily accessible area. The controls and indication labels shall be illuminated for nighttime operation. The following items shall be furnished at the lower control station and shall be clearly identified and conveniently located for ease of operation and viewing:</p> <ul style="list-style-type: none"> • Level assist switch • Override switch to override microprocessor • Emergency power unit switch <p><u>AERIAL DEVICE CONTROL STATIONS</u></p> <p>There shall be two (2) aerial device control stations, one (1) shall be referred to as the basket control station, and the other as the turntable control station. All elevation, extension, and rotation controls shall operate from both of these locations. The controls shall permit the operator to regulate the speed of the aerial functions, within the safe limits as determined by the manufacturer and NFPA standards. The controls shall be clearly marked and illuminated for nighttime operation.</p> <p>Each control shall be equipped with an operator presence, preventing accidental activation.</p> <p><u>TURNTABLE CONTROL STATION</u></p> <p>The turntable control station shall be located on the right side of the turntable so the operator may easily observe the basket while operating the controls. A console cover shall be provided at the turntable control station. The controls shall be so designed to allow the turntable control</p>		

	Bidder Complies	
	Yes	No
<p>station to immediately override the basket controls even if the ladder is being operated by the basket controls.</p> <p>The following items shall also be provided at the turntable control station and be clearly identified and illuminated for nighttime operation and conveniently located for ease of operation and viewing:</p> <ul style="list-style-type: none"> • Three (3) separate controls for raise/lower, extend/retract, and left/right rotation • Intercom controls • Tip tracking light switch • Emergency power unit switch • Operator's load chart • Two (2) position switches for selecting aerial operational speed • Aerial monitor switches <p><u>BASKET CONTROL STATION</u></p> <p>The basket control station shall be located at the front, center of the platform basket. The following items shall also be provided at the basket control station and be clearly identified and illuminated for nighttime operation and conveniently located for ease of operation and viewing:</p> <ul style="list-style-type: none"> • Three (3) separate controls for raise/lower, extend/retract, and left/right rotation • Intercom controls • Tip tracking light switch • Basket leveling switches • Operator's load chart • Aerial monitor switches <p><u>HIGH IDLE</u></p> <p>The high idle shall be controlled by the microprocessor. The microprocessor shall automatically adjust the engine rpm, to compensate for the amount of load placed upon the system. The system shall include a safety device that allows activation of the high idle, only when the parking brake is set, and the transmission is placed in neutral.</p> <p><u>INTERIOR BASKET ILLUMINATION</u></p> <p>There shall be three (3) Amdor Model AY-LB-12HW020-0, 350 lumens 20.00" weather resistant strip lights with white LEDs and stainless-steel shield provided to illuminate the interior of the aerial basket.</p> <ul style="list-style-type: none"> • One (1) light over the control console • One (1) light on the left side rear of the basket • One (1) light on the right side rear of the basket <p>The lights shall be activated when the battery switch is on and the aerial master switch is on.</p>		

	Bidder Complies	
	Yes	No
<p><u>STABILIZERS</u></p> <p>The vehicle shall come equipped with a stabilization system consisting of six (6) hydraulically operated stabilizers. The middle two (2) shall be out and down style, the front and rear two (2) shall be down only. This system shall meet or exceed all requirements of the NFPA specifications related to stabilization and setup on sloped surfaces.</p> <p>The stabilizer/leveling jacks shall have a maximum spread of 18' measured from the centerline of the jack footpads when the beams are fully extended. The beams shall be 6.81" wide x 13.00" high with 1.00" thick top and bottom plates and 1/2" thick sides of 100,000-PSI minimum yield strength steel. The cylinders shall have pilot-operated check valves with thermal relief designed to ensure that the beams shall not drift out of the stowed position during travel. Wear pads shall guide the stabilizers.</p> <p>The horizontal extension cylinders shall be totally enclosed within the beams and shall incorporate telescoping hydraulic tubing to supply the jack cylinder hydraulic power. Stabilizer hydraulic hoses shall remain stationary during operation of the stabilizers to prevent hose wear and potential failure. The cylinders shall be equipped with decelerators to reduce the speed of extension and retraction when the beams are near the fully retracted and extended positions. The stabilizer extension hydraulic cylinders shall have the following dimensions: 2.25" bore, 1.38" rod, and 62.25" stroke.</p> <p>The front vertical jack cylinders shall be capable of 15.00" ground penetration. The middle and rear vertical jack cylinders shall be capable of 18.00" ground penetration. The cylinders shall be supplied with pilot operated check valves on each jack cylinder to hold the cylinder in the stowed or working position, should a charged line be severed at any point in the hydraulic system. For safety, the integral holding valves shall be located in the cylinder base, NOT in the transfer tube. Vertical jack cylinder rods shall be fully enclosed by a telescoping inner box to protect the cylinder rods from damage. The stabilizer jack hydraulic cylinders shall have the following dimensions: 4.25" bore, 3.00" rod, and 34.88" stroke.</p> <p>The middle and rear stabilizer jack shall have a polished stainless-steel shield. The stainless-steel shield shall be a maximum of 14.00" wide so as to allow the extension of the stabilizer between parked cars or other obstacles. This plate shall serve as a protective guard and a mounting surface for warning lights. The top, forward, and rear edges shall be flanged back 90 degrees for added strength. The front stabilizers shall be designed for easy cab tilt.</p> <p><u>STABILIZER PADS</u></p> <p>The stabilizer footpad shall include an integrated stabilizer pad. The footpad shall be attached to the jack cylinder rod by means of a machined ball at the end of the jack cylinder rod which mates to a socket machined into the footpad. The footpad shall automatically position itself when being stowed so that no portion of the foot extends outside the body.</p>		

	Bidder Complies	
	Yes	No
<p><u>STABILIZER CONTROLS</u></p> <p>A portable stabilizer control pendant shall be provided. The control pendant shall be weatherproof and oil resistant. Each function and indicator light shall be labeled on a mylar lexan panel. The control pendant can be taken as far away as 15' from the vehicle with an attached coil cable.</p> <p>The stabilizer control pendant shall include the following:</p> <ul style="list-style-type: none"> • One (1) green power indicator light for stabilizer control that shall be illuminated when the Stabilizer Power Enable switch has been activated. This shall be interlocked such that the aerial master must be activated, the ladder is in the cradle, or the Global Override at the rear of the apparatus is activated. • Two (2) electric toggle switches for stabilizers: each toggle switch shall control the extend/retract (middle only) and raise/lower (front/middle/rear) of its respective stabilizer to allow vehicle set up in restricted areas and/or on uneven surfaces. • Level assist switch: The stabilizer control system shall incorporate a computerized leveling system to enhance the stabilizer set up. The computerized system shall ensure full stabilizer extension, proper jack penetration, and shall level the vehicle within eight tenths of a degree of level for safe operation of the aerial device. • Stow assist switch: The stabilizer control system shall incorporate a computerized system to move all six (6) stabilizer shoes to the full raised position while this switch is held. • Tilt assist toggle switch: The stabilizer control system shall incorporate a computerized system to tilt the chassis to five (5) degrees for enhanced side angle deployment of the aerial device. • One (1) electric push button switch for the engaging the emergency power unit. • One (1) red "stabilizer not stowed" indicator light: this light shall illuminate when the stabilizers are not in the fully stowed position. • Two (2) fully extended beams green indicator lights: these lights shall be illuminated when each of the respective stabilizer beams are fully extended. • Six (6) firm on ground green indicator lights: each light shall be illuminated when its respective stabilizer shoe is in the load supporting condition. <p>Each toggle switch shall activate the engine fast idle automatically.</p> <p>Manual override shall be supplied for each stabilizer control valve.</p> <p>A "Stabilizers Not Stowed" indicator shall be provided in the driver's compartment. It shall illuminate automatically whenever the stabilizers are not fully stowed to prevent damage to the apparatus if moved. The stabilizer system shall also be wired to the "Do Not Move Indicator Light", which shall flash whenever the apparatus parking brake is not fully engaged, and the stabilizers are not fully stowed.</p>		

	Bidder Complies	
	Yes	No
<p><u>CRADLE INTERLOCK SYSTEM</u></p> <p>A cradle interlock system shall be provided, to prevent the lifting of the aerial from the nested position, until the operator has positioned all the stabilizers in a load supporting configuration. A switch shall be installed at the cradle, to prevent operation of the stabilizers once the aerial has been elevated from the nested position.</p> <p><u>STABILIZER CONTROL BOX ALUMINUM DOOR</u></p> <p>A vertically hinged smooth aluminum door shall be provided over the stabilizer control box. The door shall be hinged outboard. There shall be a Southco raised trigger C2 chrome latch provided on the door.</p> <p><u>STABILIZER PLACEMENT</u></p> <p>There shall be two (2) cameras provided and installed on the body, one (1) directly above each stabilizer. The cameras shall be activated with a switch in the cab and shall provide a picture to specify the fully extended stabilizer position allowing the driver the ability to position the vehicle with the proper clearance for stabilizer deployment.</p> <p><u>STABILIZER PANELS</u></p> <p>The stabilizer panels shall be painted aluminum in place of polished stainless steel.</p> <p><u>HYDRAULIC SYSTEM</u></p> <p>All hose assemblies shall be assembled and crimped by the hose manufacturers certified technician.</p> <p>All manufacturing employees responsible for the installation of hydraulic components shall be properly trained. Training shall include: proper handling, installation, torque requirements, cleanliness and quality control procedures for hydraulic components.</p> <p>Hoses used in the aerial hydraulic system shall be of a premium quality hose with a high abrasion resistant cover. All pressure hoses shall have a working pressure of 4000 psi and a burst pressure rating of 16,000 psi.</p> <p>All hydraulic fittings and tubing shall be plated or constructed of 304 stainless steel to minimize corrosion.</p> <p>The fitting shall use an O-ring seal where possible to minimize hydraulic leaks.</p> <p>An interlock shall be provided that prevents activation of the hydraulic pump until the transmission is placed in neutral and the parking brake is set as outlined in the current NFPA 1901 standard.</p> <p>The system shall meet the performance requirement of the current NFPA 1901 standard, which requires adequate cooling less than 2.5 hours of operations.</p> <p>All hydraulic components that are non-sealing whose failure could result in the movement of the aerial shall comply with current NFPA 1901 standards and have burst strength of 4:1.</p>		

	Bidder Complies	
	Yes	No
<p>Dynamic sealing components whose failure could cause aerial movement shall have a margin of 2:1 on maximum operating pressure per the current NFPA 1901 standard.</p> <p>All hydraulic hoses, tubes, and connections shall have a minimum burst strength of 3:1 per the current NFPA 1901 standard.</p> <p>A chassis mounted positive displacement piston pump for consistent pressure and rapid responses shall supply hydraulic power for all aerial operations. The positive displacement pump shall provide 3,000psi. The hydraulic pump shall be solely dedicated to aerial operations (no exception).</p> <p>Each aerial shall be evaluated as to the region and climate where it shall be used to determine the optimum viscosity and proper oil grade. Oil viscosity shall be based on an optimum range of 80 to 1000 SUS during normal aerial use. Before shipment of the unit, an oil sample shall be taken and analyzed to confirm the oil is within the allowable ISO grade tolerance.</p> <p>The aerial hydraulic system shall have a minimum oil cleanliness level of ISO 18/15/13 based on the ISO 4406:1999 cleanliness standard. Each customer shall receive a certificate of actual cleanliness test results and an explanation of the rating system.</p> <p>Oil samples can be taken from the hydraulic manifold GP1 port which is also used for verifying system pressure.</p> <p>Ball valves shall be provided in the hydraulic suction lines to permit component servicing without draining the oil reservoir.</p> <p>The aerial shall incorporate the use of trombone steel tubes inside the stabilizer beams to eliminate hydraulic hose wear and leaks.</p> <p>Hydraulic power to the ladder shall be transferred from the pedestal by a hydraulic swivel.</p> <p>The system hydraulic pressure shall be displayed on the turntable display.</p> <p>The hydraulic system shall be additionally protected from excessive pressure by a secondary pressure relief valve set at 3,500 psi. In the event the main hydraulic pump compensator malfunctions, the secondary relief shall prevent system damage.</p> <p><u>HYDRAULIC CYLINDERS</u></p> <p>All cylinders used on the aerial device shall be produced by a manufacturer that specializes in the manufacture of hydraulic cylinders.</p> <p>Each cylinder shall include integral safety holding cartridges. No manifold or transfer tube mounted cartridge shall be acceptable.</p> <p>Each cylinder shall be designed to a minimum safety factor of 4:1 to failure.</p>		

	Bidder Complies	
	Yes	No
<p>All safety holding cartridges shall be installed at the cylinder manufacturer, in a controlled clean environment to avoid possible contamination and or failure.</p> <p><u>POWER TAKEOFF/HYDRAULIC PUMP</u></p> <p>The apparatus shall be equipped with a power takeoff driven by the chassis transmission and actuated by an electric shift, located inside the cab. The power takeoff which drives the hydraulic pump shall meet all the requirements for the aerial unit operations.</p> <p>An amber indicator light shall be installed on the cab instrument panel to notify the operator that the power takeoff is engaged.</p> <p>An interlock shall be provided that allows operation of the aerial power takeoff shift only after the chassis spring brake has been set and the chassis transmission has either been placed in the neutral position or drive position after the driveline has been disengaged from the rear axle.</p> <p>The hydraulic system shall be supplied by a variable displacement load and pressure compensating piston pump. The pump shall meet the demands of all three simultaneous aerial functions. The pump shall provide proper flow for single aerial function with the engine at idle speed. A switch shall be provided on the control console to increase the engine speed for multiple function operation.</p> <p><u>EMERGENCY PUMP</u></p> <p>The hydraulic system shall be designed with an auxiliary power unit meeting the guidelines of the current NFPA 1901 standard.</p> <p>The aerial shall be equipped with an emergency hydraulic pump, electrically driven from the truck batteries. The pump shall be capable of running for 30 minutes for limited aerial functions to stow the unit in case of a main pump or truck system failure. A momentary switch shall be located at the stabilizer and aerial control locations to activate the emergency pump.</p> <p><u>AERIAL CONTROL VALVE</u></p> <p>The aerial hydraulic control valve shall be designed with special spool flows, limiting the oil flow for the designed function speed. The valve shall be electrically controlled and be located below the swivel and integrated with the stabilizer control manifold. The handles shall be oriented outward and shall be spaced 1.80" apart. The valve spools shall be designed to bleed off downstream pressure, in the neutral position and allow proper sealing of any cylinder holding cartridge.</p> <p><u>OIL RESERVOIR</u></p> <p>The oil reservoir shall have a minimum capacity of 39 gallons. The oil fill location shall be easily accessible and be labeled "Hydraulic Oil Only" and indicate the grade of oil that is installed in the reservoir. A drain port shall be provided.</p>		

	Bidder Complies	
	Yes	No
<p>Two suction ports shall be provided, one for the main hydraulic pump and one for the emergency pump. The emergency suction port shall be raised slightly off the bottom of the reservoir.</p> <p>Magnetic filter shall be installed in line with the return hose.</p> <p>A float type sending unit in the reservoir shall provide an indication of oil level on an electronic display. A temperature sending unit in the reservoir shall provide indication of the oil temperature on an electronic display.</p> <p>The hydraulic oil reservoir shall be labeled per the current edition of NFPA 1901 standard.</p> <p><u>RETURN FILTER</u></p> <p>The low-pressure oil return filter shall be remote mounted in the return line and designed to prevent oil loss during filter change. A 50-psi bypass shall be included to protect the element and hydraulic system during lower than normal operating temperatures. The system shall incorporate the following filter to provide dependable service:</p> <ul style="list-style-type: none"> • return filter: beta 1000 at 6 microns <p><u>HYDRAULIC SWIVEL</u></p> <p>The aerial ladder shall be equipped with a three (3) port, high pressure hydraulic swivel which shall connect the hydraulic lines from the hydraulic pump and reservoir through the rotation point to the aerial control bank. The hydraulic swivel shall allow for 360-degree continuous rotation of the aerial.</p> <p><u>ELECTRIC SWIVEL</u></p> <p>The ladder shall be equipped with an electric swivel to allow 360 degrees rotation of the aerial while connecting all electrical circuits through the rotation point. A minimum of 36 collector rings shall be provided that are capable of supplying 20-amp continuous service. All collector rings shall be enclosed and protected with desiccant plugs against condensation and corrosion. No oil or silicone shall be used.</p> <p><u>WATER SWIVEL</u></p> <p>Water shall be transferred to the aerial waterway by means of a 5.00" internal diameter waterway, through the swivel, permitting 360-degree continuous rotation.</p> <p><u>13-BIT ABSOLUTE ENCODER</u></p> <p>The aerial ladder shall be equipped with a 13-Bit Absolute Encoder which provides 8192 counts per shaft turn for position and direction reference.</p> <p>The 13-Bit Absolute Encoder shall provide a unique binary word to reference each position and direction for all 360 degrees of rotation.</p> <p>If the power is interrupted for any reason, the 13-Bit Absolute Encoder shall allow power to be returned to the system without having to re-zero the settings.</p>		

	Bidder Complies	
	Yes	No
<p>The 13-Bit Absolute Encoder shall be an integral part of a micro-processor based control system.</p> <p><u>ELECTRICAL SYSTEM</u></p> <p>The aerial device shall utilize a microprocessor-based control system. The system shall consist of the following components:</p> <ul style="list-style-type: none"> Control System Modules <p>Each of the control system modules shall be configured as follows:</p> <ul style="list-style-type: none"> Sealed to a NEMA 4X rating Operating range from -40 degrees F to 156 degrees F (-40 degrees C to 70 degrees C) Communicate using J1939 data link Two (2) diagnostic LED lights <ul style="list-style-type: none"> One (1) green light that illuminates when module has power (B+) and ground One (1) red light that flashes to indicate the module is capable of communicating via the data link Up to 16 diagnostic LEDs on each module Ground matrix identification system <p>The following control system modules shall be used:</p> <ul style="list-style-type: none"> Control Module <ul style="list-style-type: none"> Main controller for the system USB connection allows for computer diagnostics Power Module <ul style="list-style-type: none"> Built-in fault sensing Eight (8) digital outputs Pulse width modulating (PWM) capable 10A continuous per output Circuit protection based on actual current draw (not affected by heat) Current Control Module <ul style="list-style-type: none"> Built-in fault sensing Three (3) analog inputs Eight (8) digital outputs Pulse width modulating (PWM) capable 3A continuous per output Closed Loop System Circuit protection based on actual current draw (not affected by heat) Input Module <ul style="list-style-type: none"> 16 software selectable (digital or analog) inputs Output Module <ul style="list-style-type: none"> 16 digital outputs 		

	Bidder Complies	
	Yes	No
<ul style="list-style-type: none"> • Input/Output Module <ul style="list-style-type: none"> ○ Eight (8) software selectable (digital or analog) inputs ○ Eight (8) digital outputs • Valve Module <ul style="list-style-type: none"> ○ 36 digital inputs ○ 36 digital outputs <p><u>TIP LIGHTS</u></p> <p>There shall be one (1) Whelen® Model P*H2*, 18,520 lumens 12-volt DC light with white LEDs and vertically adjustable bail mount installed on the front of the basket per the following:</p> <ul style="list-style-type: none"> • The painted parts of this light assembly to be white. • A combination of flood and spot optics. • The lights shall be controlled at the turntable and tip, at the left side cab switch panel and at the left side rear body. <p><u>TRACKING LIGHTS</u></p> <p>There shall be two (2) Whelen® MPP*, 5,090 lumens 12-volt DC LED lights with low profile pedestal mounts installed near the tip of the base section of the aerial device. The lights are installed at the tip, so the overall width of the apparatus is not affected. The lights shall be mounted below the top edge of the aerial device so the overall height of the apparatus is not affected.</p> <ul style="list-style-type: none"> • One (1) located on the left side with flood optics • One (1) located on the right side with flood optics • The painted parts of this light assembly to be white. <p>Power to the lights shall be controlled by a master on/off switch at the turntable control operator's position.</p> <p><u>BASKET ACCESS</u></p> <p>Access to the basket shall be provided by a pull-out, swing-down climbing ladder. The 2.25" deep climbing ladder surfaces shall be constructed with Traction Tread®. The bottom step shall be a flip-down, stirrup step. The access ladder shall be recessed into the angled corners of the rear body on each side. Hand holds shall be provided in each side of the ladder.</p> <p>All stepping surfaces shall have a height not greater than 14.00" from top surface to top surface.</p> <p>The bottom stepping height shall not exceed 24.00" from the ground to the top of the stepping surface at any time.</p> <p><u>STEP LIGHTS</u></p> <p>There shall be two (2) white LED step lights provided for each set of aerial basket access steps.</p>		

	Bidder Complies	
	Yes	No
<p>In order to ensure exceptional illumination, each light shall provide a minimum of 25 foot-candles (fc) covering an entire 15" x 15" square placed ten (10) inches below the light and a minimum of 1.5 fc covering an entire 30" x 30" square at the same ten (10) inch distance below the light.</p> <p>The step lights shall be actuated by the aerial master switch in the cab.</p> <p>These lights shall meet NFPA requirements for step lighting.</p> <p><u>LIGHTING ON AERIAL DEVICE</u></p> <p>There shall be TecNiq, Model D02, LED rung lighting provided on both sides of the aerial ladder base, lower mid, upper mid and fly sections. The lighting shall be located adjacent to the ladder rungs along the lower rail of the ladder sections and shall run the length of the ladder section.</p> <p>The color of the sections shall be per the following:</p> <ul style="list-style-type: none"> • The base section of the ladder to be white. • The lower mid section of the ladder to be white. • The mid section of the ladder to be white. • The upper mid section of the ladder to be white. • The fly section of the ladder to be white. <p>The LED rung lighting shall be activated when the aerial master switch is activated and a switch within reach of the driver is activated.</p> <p>The lights may be load managed when the parking brake is applied.</p> <p><u>AERIAL LOCATOR LIGHT</u></p> <p>There shall be two (2) Whelen Model VTX609*, 1.00" high x 2.25" in diameter flashing LED modules with chrome flanges installed at the aerial tip for the purpose of locating the aerial device while in operation.</p> <p>Both modules shall be activated whenever the aerial is raised from the cradle.</p> <p>The color of the locator light shall be blue.</p> <p>The lens color shall be clear.</p> <p><u>STABILIZER WARNING LIGHTS</u></p> <p>There shall be our (4) Whelen®, Model M6*C, LED flashing warning lights with Whelen, Model M6FC, chrome flanges installed, one (1) on each stabilizer cover panel.</p> <ul style="list-style-type: none"> • The front stabilizer pan lights shall be red LED with a clear lens • The rear stabilizer pan lights shall be red LED with a clear lens <p>These warning lights shall be activated by the same switch as the side warning lights.</p>		

	Bidder Complies	
	Yes	No
<p><u>STABILIZER BEAM WARNING LIGHTS</u></p> <p>Two (2) 4.00" diameter red LED flashing lights shall be mounted on each stabilizer, one (1) facing forward and one (1) facing rearward.</p> <p>The lights shall be Grote Supernova 40 series LED lights.</p> <p>The lights shall be recessed in the horizontal beam of the stabilizer.</p> <p>These warning lights shall be activated with the aerial master switch.</p> <p><u>STABILIZER SCENE LIGHTS</u></p> <p>There shall be one (1) Amdor®, Model AY-LB-12HW012, 190 lumens, 12" long, white LED strip light installed under each stabilizer beam to illuminate the surrounding area. A total of six (6) lights shall be installed. The lights shall be activated by the aerial master switch.</p> <p><u>DC POWER CABLE TO TIP</u></p> <p>There shall be a cable installed in the aerial device to provide 12.88 amps @ 12 volts DC to the tip of the aerial device.</p> <p><u>UNDER PLATFORM LIGHTING</u></p> <p>There shall be four (4) Whelen® Model PSL1B*, 4,500 lumens light(s) with white LEDs and adjustable bail bracket(s) provided under the left side front corner basket step, the left side front basket step, the right side front basket step and the right side front corner basket step. The painted parts of this light assembly to be white.</p> <p>The light(s) shall be controlled from a switch(es) at the platform/tip, turntable, and cab.</p> <p><u>2-WAY AERIAL COMMUNICATION SYSTEM</u></p> <p>There shall be a Fire Research model ICA910 two-way intercom system provided. The control module with an LED volume display and push-button volume control shall be located on the turntable operator console.</p> <p>A hands-free module shall be located at the aerial tip or platform and constantly transmit to the other module unless the control module push-to-talk button is pressed.</p> <p>Each intercom unit shall be weatherproof.</p> <p><u>BREATHING AIR</u></p> <p>Breathing air shall be supplied to the aerial platform. The air system shall incorporate one (1) 437 cubic foot, 4500-psi cylinder. To allow the turntable operator an unobstructed view of the platform the cylinder shall be mounted on the left side of the aerial base section while viewed from the turntable. A pressure regulator located at the air cylinder. A shutoff valve with guard shall be provided on the cylinder. The air shall be routed to the basket using hose especially designed for use in breathing air systems. At the platform, the breathing air shall be accessible via two (2) quick couplings for air masks. These shall have a Hansen brass 3000 series coupling. Two (2) couplings shall be located at the rear of the basket, one (1) on each side.</p>		

	Bidder Complies	
	Yes	No
<p>There shall be a weather resistant storage compartment for two (2) air masks provided at the basket with a SouthCo stainless steel draw latch. A 50' recharge hose shall be provided for refilling the air cylinder without having to remove the tank from its mounting.</p> <p>The breathing air cylinder shall be designed and constructed to conform to the requirements of the United Nations (UN) on the transportation of dangerous goods.</p> <p><u>BREATHING AIR LEVEL AND WARNING SYSTEM</u></p> <p>The level of breathing air remaining shall be visible on the LCD display at all operating positions. The display shall incorporate a low-pressure warning circuit that activates an audible alarm when 20% maximum air cylinder capacity remains. A second, louder audible alarm shall activate when the remaining air level drops to 10% of maximum air cylinder capacity.</p> <p><u>AERIAL PEDESTAL</u></p> <p>The aerial pedestal shall accommodate the height of the cab.</p> <p><u>3-IN-1 BASKET OPTION BRACKETS</u></p> <p>Brackets shall be provided to increase the safety of firefighters during fire ground and rescue operations. The removable brackets shall have the following three (3) functions: securing a roof ladder to the basket, two (2) rappelling anchor points, and mounting bars to allow the secure mounting of a rescue basket stretcher.</p> <p>The roof ladder mounting bracket shall be designed to allow firefighter access below the basket using up to a 20' roof ladder. The ladder shall be secured through its beams and one (1) rung, by a 1.00" diameter aluminum rod capable of being positively latched in place and able to withstand a minimum of a 500lb load. There shall be a latch to keep the ladder in a vertical position at all times. A set of nylon guides shall be provided to aid in positioning the roof ladder on the mounting brackets.</p> <p>Two (2) rappelling arms shall be provided. Forged stainless steel eyebolts with a 1.38" inside diameter shall be incorporated into the design of the brackets for use as a rappel line anchor. Each anchor point shall have a capacity of 300lb.</p> <p>Rescue basket support brackets shall be provided to allow patient transport using the aerial. Two (2) quick clip basket straps shall be used to secure the basket to the brackets.</p> <p>Strain gauging and testing shall have been completed on the system (ladder and complete holding device) to ensure structural integrity of all components and maintain a minimum of two to one (2:1) safety factor.</p> <p><u>AIR HORN CONTROL AT AERIAL TURNTABLE</u></p> <p>An air horn control button shall be provided at the aerial turntable. This button shall be red in color and properly labeled. Collector ring space must be available for this option to be utilized.</p>		

	Bidder Complies	
	Yes	No
<p><u>AERIAL TURNTABLE MANSAYER™ BAR</u></p> <p>A ManSaver™ bar shall be red in color and installed at the aerial turntable.</p> <p><u>AERIAL WATERWAY</u></p> <p>The aerial waterway shall be capable of being supplied by either a midship mounted pump or an external water source through a 5.00" intake at the side of the apparatus.</p> <p>A 5.00" water swivel shall be installed below the aerial turntable permitting the ladder to rotate 360 degrees continuously.</p> <p>A 5.00" water swivel shall be installed at the aerial heel pivot pin that shall permit water tower operations of -15 degrees to 77 degrees. The heel pivot pin shall not be integral with the waterway swivel at any point. The waterway design shall allow complete servicing of the waterway swivel without disturbing the heel pivot pin.</p> <p>A telescoping aluminum waterway shall be installed on the side of the aerial ladder sections. The waterway shall consist of a 5.50" diameter tube for the base section, 5.00" diameter tube for the lower mid section, 4.50" diameter tube for the center mid section, 4.00" diameter tube for the upper mid section, and 3.50" diameter tube for the fly section.</p> <p>A 1.50" drain shall be provided for the waterway.</p> <p><u>WATERWAY SEALS</u></p> <p>The waterway seals shall be of type-B PolyPak design, composed of nitroxile seal and a nitrile wiper, which together offer maximum stability and extrusion resistance on the waterway. The seal shall be capable of withstanding pressures up to 2000 psi, temperatures in excess of 250 degrees Fahrenheit and have resistance to all foam generating solutions. The seals shall be internally lubricated.</p> <p>The waterway seals shall have automatic centering guides constructed of synthetic thermalpolymer. The guides shall provide positive centering of the extendible sections within each other and the base section to insure longer service life and smoother operation.</p> <p><u>PLATFORM WATER SYSTEM</u></p> <p>A 4.00" (internal diameter) water swivel shall connect the fly section waterway to the platform waterway. The water swivel shall permit water tower operations from -15 degrees to 77 degrees. The water shall be routed from the swivel to a 4.00" gear operated valve(s) on the front of the platform using a combination of 4.00" tubes and piping. The monitor(s) shall be bolted onto the valve(s).</p> <p>A 2.50" preset pressure relief valve shall be provided in the waterway system. It shall be designed to protect the aerial waterway from excess pressure. It shall dump water to the ground when operating.</p>		

	Bidder Complies	
	Yes	No
<p>A shower nozzle rated at 75 gpm shall be provided beneath the platform for heat protection for the platform personnel. A direct linkage control for the shower nozzle shall be provided.</p> <p><u>AERIAL MONITOR</u></p> <p>An Akron Model 3486 monitor with stow and deploy shall be provided at the front of the platform with a Arkon 2000 gpm Model 5178 electric nozzle with built in stream shaper.</p> <p>The monitor's functions shall be controlled electrically from two (2) separate locations. One (1) control shall be located at the turntable control console and the other at the basket control console.</p> <p><u>WATERWAY FLOWMETER</u></p> <p>Waterway flow, including total water flowed, shall be monitored by the microprocessor. An LCD display shall be located at the upper and lower control stations.</p> <p><u>WATERWAY INLET</u></p> <p>There shall be a 5.00" schedule 10 stainless steel inlet pipe on the right side of the apparatus. The inlet shall be connected to the base of the ladder, through the turntable swivel, to assure continuous rotation. The inlet shall terminate with a 5.00" NST chrome adapter and a long-handled chrome cap.</p> <p><u>AERIAL VALVE MANIFOLD UNDER MONITOR</u></p> <p>An Akron Aerial Valve Manifold (AVM) valve and manifold, Model S5 shall be provided under the monitor at the aerial platform. This configuration provides a valve to control flow through the monitor and an additional valve as a discharge connection for hose.</p> <p>The AVM monitor flow control valve shall be manually operated at the platform with a slow close gear valve. The valve shall have an integral automatic drain valve.</p> <p>The hose connection valves, located on the left and right side of the ladder shall have a 90-degree, 1/4 turn ball valve with 2.50" NH outlet threads. A 2.50" NH cap with chain shall be provided.</p> <p>A pressure relief valve shall be installed to prevent incidental damage to the waterway system when both valves are closed.</p> <p><u>TOOLS</u></p> <p>The following tools shall be provided for retorquing of all specified bolts as recommended by the manufacturer:</p> <ul style="list-style-type: none"> • Torque Wrench • All Required Extensions, Sockets and Adapters • 4-to-1 Multiplier 		

		Bidder Complies	
		Yes	No
<u>MANUALS</u>			
The aerial manufacturer shall provide two (2) operator maintenance manuals and two (2) wiring diagrams pertaining to the aerial device.			
<u>INITIAL INSTRUCTION</u>			
On initial delivery of the fire apparatus, the contractor shall supply a qualified representative to demonstrate the apparatus and provide initial instruction to the fire department regarding the operation, care, and maintenance of the apparatus for a period of three (3) consecutive days.			
<u>LOOSE EQUIPMENT</u>			
The following equipment shall be furnished with the completed unit:			
- One (1) bag of chrome, stainless steel, or cadmium plated screws, nuts, bolts, and washers, as used in the construction of the unit			
1	MSA Evolution 6000 Plus Thermal Imaging Camera with 1 spare battery and Evolution 6000 Series TIC Vehicle-Mounted Charger and Charging base mounted on the engine tunnel		
1	Zoll AED Plus		
6	Streamlight Vulcan 180 LED Firefighting Lantern with charging rack AC/DC Vulcan 180 – black, Part: 44350 and DC2 direct wire charge cord, Part: 22050 to be mounted		
1	MSA Altair 5x Multigas Detector; Detector Color (LEL, O2, CO, H2S, PID), Part No: 10165445		
4	Universal Flex-Shaft Hoistway Door Key Set (10 pc.), Part: UHDK15PH		
1	Mobile-Vision #FBHKSA64ZVN1K4 Flashback HD, 64 GB storage with #MVD-OHC-TAHOE Mount, mounted on front windshield		
12	Dyna Med Modular Trauma III BLS Kit		
20	Scott Air-Pak X3 Pro SCBA, 4.5		
20	Scott Vision C5 Facepiece size Medium		
25	Scott carbon-wrapped cylinder, 4500 psi, Snap-Change		
7	Klein Tools Deluxe Leather Bag, 24-Inch, Part: 5108-24 with HRS Emergency Hood Release Tool, Klein Tools Electricians Cable Cutter Insulated, Part: 63050-EINS, Klein Tools Pump Pliers, 10-Inch, Part: D502-10, Klein Tools Slip-Joint Pliers, 8-Inch, Part: D511-8, Klein Tools Multi-Bit Screwdriver with Storage 15-Piece, Part: 32290, Klein Tools Folding Jab Saw, Part: 31737, Klein Tools Folding Utility Knife, Part: 44131, Klein Tools Dual Range Non-Contact Voltage Tester, Part: NCVT-2 and Klein Tools Adjustable Wrench, Extra-Wide Jaw, 8-Inch, Part: D509-8		

		Bidder Complies	
		Yes	No
1	Akron Revolution Intake Valve with swivel elbow inlet, 5" Storz inlet and Storz cap with chain		
1	Akron E-Z Lok Nozzle Holder, Style 373, 1-1/2" size		
1	Akron Smoothbore nozzle, Style 1441, pistol grip, dual stacked tips with 373 1 1/2" mount, to be mounted		
1	Gated Wye Valve; TFT AYNJ-NF, with RH M-25 Mount, to be mounted		
1	Gate Valve; Harrington, Part: HHGV-25NH-25NH, hand wheel handle with #RH-M-25, to be mounted		
1	TFT Storz wrenches with holder, Part #A3810, to be mounted		
1	RH universal spanner wrench set, Part #148-3 includes hydrant wrench and two universal spanner wrenches with holder		
1	High rise pack with Akron Mid-Range Assault Nozzle, Style 4863, 1-1/2" size inlet, 150 gpm @ 75 psi ,Elkhart Standpipe Bag Kit with Elkhart pressure gauge, Model: 228A, Elkhart Elbow, Model: 105A. Elkhart Gate Valve, Model: X86A, Elkhart spanner wrenches, Model: T-464, Elkhart reducer adapter, Model: 101A and Adjustable wrench		
5	Traffic Cones SFA CSB28-RFL		
2	Sledgehammer, Flamefighter SH08		
2	Flamefighter DWH04D 4' Dry Wall Hook with Zico VM-5 Mounts		
2	Lonestar axe, Notched Pig, 32" length		
20	Ziamatic Sure-Grip Tool Mount, SKU: SG-VM-1		
2	Ziamatic Bolt Cutter Bracket, SKU: BCB-		
2	Ziamatic Sledgehammer Bracket, SKU: SHB		
2	FHU Firemaxx26 tool with 4 Pac 1004 Tool mount		
1	Gas/Water key		
1	HR-2 Hydra-Ram II Forcible Entry Tool with 2 Pac 1070 mounts		
2	Fire Hooks Pro Bar, 30" length, #PB-30		
2	Flat head axe , Flamefighter FHAFR6LB.		
2	Pick head axe, Flamefighter PHAFR6LB.		

		Bidder Complies	
		Yes	No
1	Klein Tools Bolt Cutters with Steel Handles, 30-Inch, Part: 63330		
1	Ziamatic Bolt Cutter Bracket, Model BCB, standard size for 18"-36" bolt cutters		
2	Ziamatic 6' pike pole, Model: PCM-6		
2	Ziamatic 10' pike pole, Model: PCM-10		
2	6' New York roof hook, FHU RH-6		
2	8' New York roof hook, FHU RH-8		
1	R & B Fabrications 442RD Hydrant Bag with 2 Red Head 101 universal spanner wrench, 2 TFT A3090 Storz wrench		
1	Duo Safety 16' Aluminum Roof Ladder, Double End, Series 875-DR- IN TRUCK SPECIFICATIONS		
1	R-N-R plastic stokes with steel rails, SKU: RS001		
1	Tempest Technology VentMaster chainsaw, Model No: 572HD-20-DG .404, Part No: TV400-080		
4	Raptor Carbide chain for TV400-080, #TV415-002		
1	Ziamatic Fixed Chain saw Mount, SKU: QM-CSM- and 1 Ziamatic Spare chain holder, SKU: QM-SCH		
1	CMC Pro CSR2 Pulley System, Item: 500102		
1	6' New York roof hook		
1	Flamefighter FHAFR6LB Flat head axe with SPC ZAH5101C/ZSMA5201C holder mounted in platform		
1	TFT A3810 Storz wrenches with holder, includes 4 wrenches, to be mounted		
1	RH 148-3 universal spanner wrench set, includes hydrant wrench and two universal spanner wrenches, with holder, to be mounted		
1	Honda portable generator, EU3000i Handi, 3000 watts, 120V with Compartment mounts		
2	Electric Cord Reels Cox Reels Model #112Y-12		
4	Streamlight Portable Scene Light II with Light Cord with 120V AC Plug, Part #22074		
1	Dewalt Flexvolt 60V Max Brushless Reciprocating Saw 2 Battery Kit, Part: DCS388T2 with Includes: Saw, Battery, Charger, Blade, Storage Bag and charging base mounted in the EMS compartment with power supplied by 120V receptacle		

		Bidder Complies	
		Yes	No
1	Dewalt Flexvolt 60V Max Cordless Brushless 9-inch Cut-Off Saw Kit, Part: DCS690X2, includes saw, batteries (2), fast charger, cutting wheel, diamond cutting wheel and Charging base mounted in the EMS compartment with power supplied by 120V receptacle		
1	Tempest Technology VentMaster chainsaw, Model No: 572HD-20-DG .404, Part No: TV400-080		
4	Raptor Carbide chain for TV400-080, #TV415-002		
1	Tempest Saw Bracket for TV400-080, #TV455-005		
1	Ziamatic QM-CSM-2, Spare chain holder to carry 2 extra chains in the compartment		
1	Ziamatic Double Premix/Bar Container Holder, yellow, SKU: QM-PMH-D		
3	Tempest Technology All-Cut Rescue Diamond Blade		
1	Saw blade holder to carry 1 extra blade in the compartment, Ziamatic #QM-SBPM		
1	Tempest Technology electric smoke ejector, Part No: 911-1010, Model: EB-16-S-1.5 with Door bar holder (300-141) and Hanging bracket set (300-142)		
1	Tempest Technology VS-1.2, Part No: 910-1825, with battery and charger		
1	Extra battery for Tempest 910-1825, #585-015		
1	Charging base mounted in EMS compartment with power supplied by 120V receptacle for Tempest 910-1825.		
4	Pac Mule ladder belt, Large		
4	Pac Mule ladder belt, Large		
4	Pac Mule ladder belt, Large		
1	Mounting/Storage options needed for pack mule belts		
14	Sav-A-Jake Fire Hose Straps Denver Load, 3 pack, Item ID: 130-DSMBLKSIL-BAR		
10	Sav-A-Jake Adjustable Water Can Sling, Item ID: 377		
4	Sav-A-Jake Halligan and Axe Marrying Strap, Item ID: 104-D		
1	Junkin Stretcher Bridle Sling, Item: JSA-300-X		
1	SAR Basket Stretcher Lifting Sling, Part: ST008		
2	Holmatro Vehicle Stabilization Strut / V-Strut and Mounts		

		Bidder Complies	
		Yes	No
2	Amkus Part: WNDREM-KIT with Windshield cutter, FuBar tool, windshield suction cups (2), Battery, Charger, Storage bag		
1	Box of 30 rolls: Howie's Black Cloth Hockey Tape, 1.5"		
3	Nikon D500 with AF-S DX NIKKOR 18-200mm f/3.5-5.6G ED VR II, 72mm Circular Polarizer II, LC-72 Snap-On Front Lens Cap 72mm, AF-S DX Micro NIKKOR 85mm F3.5G ED VR, 52mm Circular Polarizer II, WR-T10 Wireless Remote Controller (transmitter), EN-EL15 Rechargeable Li-ion Battery, Lexar Professional 2000X 128GB SDXC UHS-II (memory card)		
3	Camera Bag: Tamrac Anvil Slim 15		
3	Streamlight Portable Scene Light II		
3	Brass 2-1/2" female national hose threads to male garden hose threads (pin lug), Fire Hose Direct, Part: B37P25G		
2	Combustible Gas Detector, Sirchie.com, SKU: CGD8800X		
2	Akron Brass Mercury Quick Attack LE Portable Monitor, Style 3444 with Mounting bracket and 2-1/2" size inlet Nozzle Style 4445, Fixed 500 gpm @ 100 psi		
2	Elkhart Standpipe Bag Kit with Elkhart pressure gauge, Model: 228A, Elkhart Elbow, Model: 105A, Elkhart Gate Valve, Model: X86A, Elkhart spanner wrenches, Model: T-464, Elkhart reducer adapter, Model: 101A and Adjustable wrench		
1	Tempest Technology VS-1.2, Part No: 910-1825, with battery and charger		
1	Extra battery for Tempest 910-1825, #585-015		
4	Paratech Supporter X2 with extension		
4	Poly-Tech America Paratech Supporter X2 Mount (Self Tapping Screws)		
1	Poly-Tech America Paratech Quad Ratchet Belt Caddy (Self Tapping Screws)		
5	Tempest smoke ejector parts, Door bar holder (300-141) and Hanging bracket set (300-142)		
2	Dewalt Flexvolt 60V Max Brushless Reciprocating Saw 2 Battery Kit, Part: DCS388T2 with Saw, Battery, Charger, Blade, Storage Bag and Vehicle mount		
2	Dewalt Flexvolt 60V Max Cordless Brushless 9-inch Cut-off Saw Kit, Part #DCS690X2 with saw, batteries (2), fast charger, cutting wheel, diamond cutting wheel and Charging base mounted in the Ems Compartment with power supplied by 120V receptacle. Vehicle Mount needed.		

		Bidder Complies	
		Yes	No
10	Ziamatic QM-PMH-D, double premix/bar container holder, yellow		
4	Tempest Technology Saw Bracket #TV455-005		
2	Tempest Technology KIS-40 Adjustable Depth Gauge/Guard		
4	Fire Hooks Pro Bar, 30" length		
4	Lonestar axe, Notched Pig, 32" length		
1	Ziamatic Sledgehammer Bracket, SKU: SHB		
4	Streamlight Portable Scene Light II with Streamlight Portable Scene Light Cord with 120V AC Plug, Part #22074		
6	New York Roof Hook, 6' length, FHU-RH-6		
12	Fire Hooks Unlimited Hooks Nest 4		
6	New York Roof Hook, 8' length, FHU-RH-8		
2	FHU FIREMAXX with 4 PAC mounts		
1	Confined Space Rescue Team Kit, Item 501301- CMC		
1	Pro Series Litter Harness, Item 724121 - CMC		
1	Low-Angle Litter Harness, Item# 724123 - CMC		
6	Edge Guard, Item# 294029 - CMC		
2	Rope Rescue Manual, Item# 993221 - CMC		
2	Rope Rescue Field Guide, Item# 993232 - CMC		
2	Confined Space Field Guide, Item# 993224 - CMC		
<u>PAINT</u>			
The exterior custom cab and body painting procedure shall consist of a seven (7) step finishing process as follows:			
1. <u>Manual Surface Preparation</u> - All exposed metal surfaces on the custom cab and body shall be thoroughly cleaned and prepared for painting. Imperfections on the exterior surfaces shall be removed and sanded to a smooth finish. Exterior seams shall be sealed before painting. Exterior surfaces that shall not be painted include chrome plating, polished stainless steel, anodized aluminum and bright aluminum treadplate.			

	Bidder Complies	
	Yes	No
<p>2. <u>Chemical Cleaning and Pretreatment</u> - All surfaces shall be chemically cleaned to remove dirt, oil, grease, and metal oxides to ensure the subsequent coatings bond well. The aluminum surfaces shall be properly cleaned and treated using a high pressure, high temperature 4 step Acid Etch process. The steel and stainless surfaces shall be properly cleaned and treated using a high temperature 3 step process specifically designed for steel or stainless. The chemical treatment converts the metal surface to a passive condition to help prevent corrosion. A final pure water rinse shall be applied to all metal surfaces.</p> <p>3. <u>Surfacer Primer</u> - The Surfacer Primer shall be applied to a chemically treated metal surface to provide a strong corrosion protective basecoat. A minimum thickness of 2 mils of Surfacer Primer is applied to surfaces that require a Critical aesthetic finish. The Surfacer Primer is a two-component high solids urethane that has excellent sanding properties and an extra smooth finish when sanded.</p> <p>4. <u>Finish Sanding</u> - The Surfacer Primer shall be sanded with a fine grit abrasive to achieve an ultra-smooth finish. This sanding process is critical to produce the smooth mirror like finish in the topcoat.</p> <p>5. <u>Sealer Primer</u> - The Sealer Primer is applied prior to the Basecoat in all areas that have not been previously primed with the Surfacer Primer. The Sealer Primer is a two-component high solids urethane that goes on smooth and provides excellent gloss hold out when topcoated.</p> <p>6. <u>Basecoat Paint</u> - Two coats of a high performance, two component high solids polyurethane basecoat shall be applied. The Basecoat shall be applied to a thickness that shall achieve the proper color match. The Basecoat shall be used in conjunction with a urethane clear coat to provide protection from the environment.</p> <p>7. <u>Clear Coat</u> - Two (2) coats of Clear Coat shall be applied over the Basecoat color. The Clear Coat is a two-component high solids urethane that provides superior gloss and durability to the exterior surfaces. Lap style and roll-up doors shall be Clear Coated to match the body. Paint warranty for the roll-up doors shall be provided by the roll-up door manufacture.</p> <p>Each batch of basecoat color shall be checked for a proper match before painting of the cab and the body. After the cab and body are painted, the color shall be verified again to make sure that it matches the color standard. Electronic color measuring equipment shall be used to compare the color sample to the color standard entered in the computer. Color specifications shall be used to determine the color match. A Delta E reading shall be used to determine a good color match within each family color.</p> <p>All removable items such as brackets, compartment doors, door hinges, and trim shall be removed and separately if required, to ensure paint behind all mounted items. Body assemblies that cannot be finish painted after assembly shall be finish painted before assembly.</p> <p>The paint finish quality levels for critical areas of the apparatus (cab front and sides, body sides and doors, and boom lettering panels) are to meet or exceed Cadillac/General Motors</p>		

	Bidder Complies	
	Yes	No
<p>GMW15777 global paint requirements. Orange peel levels are to meet or exceed the #6 A.C.T. standard in critical areas. These requirements must be met in order for the exterior paint finish to be considered acceptable. The manufacture's written paint standards shall be available upon request.</p> <p>The cab shall be two-tone, with the upper section painted #10 white along with a shield design on the cab face and lower section of the cab and body painted #90 red.</p> <p><u>PAINT - ENVIRONMENTAL IMPACT</u></p> <p>Contractor shall meet or exceed all current State regulations concerning paint operations. Pollution control shall include measures to protect the atmosphere, water, and soil. Controls shall include the following conditions:</p> <ul style="list-style-type: none"> • Topcoats and primers shall be chrome and lead free. • Metal treatment chemicals shall be chrome free. The wastewater generated in the metal treatment process shall be treated on-site to remove any other heavy metals. • Particulate emission collection from sanding operations shall have a 99.99% efficiency factor. • Particulate emissions from painting operations shall be collected by a dry filter or water wash process. If the dry filter is used, it shall have an efficiency rating of 98.00%. Water wash systems shall be 99.97% efficient • Water from water wash booths shall be reused. Solids shall be removed on a continual basis to keep the water clean. • Paint wastes are disposed of in an environmentally safe manner. • Empty metal paint containers shall be to recover the metal. • Solvents used in clean-up operations shall be recycled on-site or sent off-site for distillation and returned for reuse. <p>Additionally, the finished apparatus shall not be manufactured with or contain products that have ozone depleting substances. Contractor shall, upon demand, present evidence that the manufacturing facility meets the above conditions and that it is in compliance with his State EPA rules and regulations.</p> <p><u>PAINT CHASSIS FRAME ASSEMBLY</u></p> <p>The chassis frame assembly shall be finished with a single system black topcoat before the installation of the cab and body, and before installation of the engine and transmission assembly, air brake lines, electrical wire harnesses, etc.</p>		

Bidder Complies	
Yes	No

Components that are included with the chassis frame assembly that shall be painted are:

- Frame rails
- Frame liners
- Cross members
- Axles
- Suspensions
- Steering gear
- Battery boxes
- Bumper extension weldment
- Frame extensions
- Body mounting angles
- Rear Body support substructure (front and rear)
- Pump house substructure
- Air tanks
- Steel fuel tank
- Castings
- Individual piece parts used in chassis and body assembly

FILM TECHNICAL PROPERTIES		
PROPERTY	TEST METHOD	PERFORMANCE
Color	—	Black
Film Thickness	—	0.5 - 1.5 Mils
Gloss - 60 Degree	ASTM D523	65 - 85
Pencil Hardness	ASTM D3363	2H Minimum
Direct Impact	ASTM D2794	100 in. - lbs. Minimum
Reverse Impact	ASTM D2794	60 in. - lbs. Minimum
Crosshatch Adhesion	ASTM D3359	4B - 5B
Humidity	ASTM D1735	1000 Hours Minimum
Water Immersion	ASTM D870	250 Hours Minimum
Gravelometer	GM9508P	6 Minimum
Throwpower	GM9535P	12 - 15 in.
Cold rolled steel lab panels, Zinc Phosphate pretreatment, 0.6 mils average film thickness, cured 20 minutes @ 350°F.		
PROPERTY	SUBSTRATE PRETREATMENT	SALT SPRAY* 1000 HOURS
Corrosion Resistance	CRS / Zinc Phos / Non-Chrome	1 - 2 mm
*Salt Spray - ASTM B117, cold rolled steel lab panels cured 20 minutes @ 350°F. [Average Total Scribe Creep]		

Components treated with epoxy E-coat protection prior to paint:

- Two (2) C-channel frame rails
- Two (2) frame liners

The E-coat process shall meet the technical properties shown.

COMPARTMENT INTERIOR PAINT

The interior of all compartments shall be painted with a gray spatter type paint.

AERIAL DEVICE PAINT COLOR

The aerial device paint procedure shall consist of a seven (7) step finishing process as follows:

1. Manual Surface Preparation - All exposed metal surfaces on the aerial device structural components above the rotation point shall be thoroughly cleaned and mechanically shot-blasted to remove metal impurities and prepare the aerial for painting.
2. Zinc Rich Primer - Zinc rich primer shall be applied to the torque box and stabilizers.
3. Primer/Surfacer Coats - A two (2) component epoxy primer/surfacer shall be applied to the mechanically shot-blasted metal surfaces to provide a strong corrosion protective base coat and to smooth out the surface. All seams shall be caulked with a two (2) component epoxy caulk before painting.

	Bidder Complies	
	Yes	No
<p>4. <u>Hand Sanding</u> - The primer/surfacer coat of the outer surfaces of the handrails and base rails shall be lightly sanded to a smooth finish.</p> <p>5. <u>Primer Coat</u> - A two (2) component epoxy primer coat shall be applied over the sanded primer.</p> <p>6. <u>Topcoat Paint</u> - Urethane base coat shall be applied to opacity for correct color matching.</p> <p>7. <u>Clear Coat</u> - Two (2) coats of an automotive grade two (2) component urethanes shall be applied.</p> <p>Surfaces that shall not be painted include all chrome plated, polished stainless steel, anodized aluminum, and bright aluminum treadplate.</p> <p>All buy out components, such as monitor, nozzle, gauges, etc. shall be supplied as received from the vendor.</p> <p>Removable items such as brackets shall be removed and painted separately to ensure paint coverage behind all mounted items.</p> <p>The aerial device components shall be painted as follows using the aforementioned seven (7) step finishing process:</p> <ul style="list-style-type: none"> • Aerial basket and basket leveling cylinders at tip: white 10 • Aerial device ladder sections and extension cylinders: white 10 • Aerial turntable and leveling cylinders (if applicable) at turntable: white 10 • Aerial control console: white 10 • Aerial lift cylinders: white 10 • Aerial rotation motor (if applicable): black • Aerial torque box, support structure and components below the rotation point: gloss black primer • Aerial stabilizers (middle and rear only): black 101 • Aerial boom support: gloss black primer <p><u>REFLECTIVE STRIPES</u></p> <p>Three (3) reflective stripes shall be provided across the front of the vehicle and along the sides of the body. The reflective band shall consist of a 1.00" blue stripe at the top with a 1.00" gap then a 6.00" white stripe with a 1.00" gap and a 1.00" blue stripe on the bottom.</p> <p>The reflective band provided on the cab face shall be below the headlights on the fiberglass.</p> <p><u>REAR CHEVRON STRIPING</u></p> <p>There shall be alternating chevron striping located on the rear-facing vertical surface of the apparatus. Covered surfaces shall include the rear wall and aluminum doors. Rear compartment doors, stainless steel access doors, and the rear bumper shall not be covered.</p>		

	Bidder Complies	
	Yes	No
<p>The colors shall be Red V98-12 and Yellow V98-18 oralite.</p> <p>Each stripe shall be 6.00" in width.</p> <p>This shall meet the requirements of the current edition of NFPA 1901, which states that 50% of the rear surface shall be covered with chevron striping.</p> <p><u>REFLECTIVE STRIPE ON STABILIZERS</u></p> <p>There shall be 6.00" wide alternating Red V98-12 oralite and Yellow V98-18 oralite reflective chevron stripes provided on the forward and rear facing sides of both aerial stabilizers. The stripes shall be angled at a 45-degree angle.</p> <p><u>JOG(S) IN REFLECTIVE BAND</u></p> <p>The reflective band located on each side of the apparatus body shall contain one (1) jog(s) and shall be angled at an approximately a 45 degree when installed.</p> <p><u>STOP SIGN, REFLECTIVE, CAB DOORS</u></p> <p>A 12.00" x 12.00" reflective stop sign shall be provided on the interior of each cab door. The stop sign shall be located on the stainless-steel door panel.</p> <p>This sign shall meet the NFPA 1901 requirement.</p> <p><u>CAB STRIPE</u></p> <p>There shall be a genuine gold leaf stripe provided on both sides of the cab in place of the chrome molding and on the cab face with shield.</p> <p><u>LETTERING</u></p> <p>The lettering shall be totally encapsulated between two (2) layers of clear vinyl.</p> <p><u>LETTERING</u></p> <p>One hundred one (101) to one hundred twenty (120) genuine gold leaf lettering, 3.00" high, with outline and shade shall be provided.</p> <p><u>LETTERING</u></p> <p>There shall be reflective lettering, 18.00" high, with outline and shade provided. There shall be two (2) letters provided.</p> <p><u>LETTERING</u></p> <p>There shall be genuine gold leaf lettering, 6.00" high, with outline and shade provided. There shall be two (2) letters provided.</p> <p><u>LETTERING</u></p> <p>Forty-one (41) to sixty (60) reflective lettering, 10.00" high, with outline and shade shall be provided.</p>		

	Bidder Complies	
	Yes	No
<p><u>LETTERING, REFLECTIVE, "DIAL 911"</u></p> <p>There shall be two (2) 6.00" high blue reflective decal, "Dial 911", shall be installed at RS1 and LS1 compartment doors.</p> <p><u>REFLECTIVE PLATE/S FOR LETTERING</u></p> <p>There shall be one (1) aluminum plate/s provided for department lettering. The plates shall be covered with white reflective material and shall be mounted Tag Holder. They shall be 8x20 inches in size.</p> <p><u>EMBLEMS</u></p> <p>There shall be a pair of American flag emblems, installed Window behind cab doors flowing into crew cab window on both sides of the truck. The emblem shall be waving and made from Gerber Vision material.</p> <p><u>EMBLEM/S</u></p> <p>There shall be two (2) gold leaf emblem/s, installed Front cab doors. Emblem/s shall be modeled after the department patch.</p> <p><u>CAB GRILLE DESIGN</u></p> <p>An American flag design shall be painted on the cab grille.</p> <p><u>FIRE APPARATUS PARTS MANUAL</u></p> <p>There shall be one (1) custom parts manual(s) in USB flash drive format for the complete fire apparatus provided.</p> <p>The manual(s) shall contain the following:</p> <ul style="list-style-type: none"> • Job number • Part numbers with full descriptions • Table of contents • Parts section sorted in functional groups reflecting a major system, component, or assembly • Parts section sorted in alphabetical order • Instructions on how to locate parts <p>Each manual shall be specifically written for the chassis and body model being purchased. It shall not be a generic manual for a multitude of different chassis and bodies.</p> <p><u>Service Parts Internet Site</u></p> <p>The service parts information included in these manuals are also available on the factory website. The website offers additional functions and features not contained in this manual, such as digital photographs and line drawings of select items. The website also features electronic search tools to assist in locating parts quickly.</p>		

	Bidder Complies	
	Yes	No
<p><u>CHASSIS SERVICE MANUALS</u></p> <p>There shall be one (1) chassis service manuals on USB flash drives containing parts and service information on major components provided with the completed unit.</p> <p>The manual shall contain the following sections:</p> <ul style="list-style-type: none"> • Job number • Table of contents • Troubleshooting • Front Axle/Suspension • Brakes • EngineTires • Wheels • Cab • Electrical, DC • Air Systems • Plumbing • Appendix <p>The manual shall be specifically written for the chassis model being purchased. It shall not be a generic manual for a multitude of different chassis and bodies.</p> <p><u>CHASSIS OPERATION MANUAL</u></p> <p>The chassis operation manual shall be provided on one (1) USB flash drive.</p> <p><u>ONE (1) YEAR MATERIAL AND WORKMANSHIP</u></p> <p>Each new piece of apparatus shall be provided with a minimum one (1) year basic apparatus material and workmanship limited warranty. The warranty shall cover such portions of the apparatus built by the manufacturer as being free from defects in material and workmanship that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>THREE (3) YEAR MATERIAL AND WORKMANSHIP</u></p> <p>The new chassis shall be provided with a three (3) year material and workmanship limited warranty. The warranty shall cover such portions of the chassis built by the manufacturer as being free from structural failures caused by defects in material and workmanship that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>ENGINE WARRANTY</u></p> <p>A Cummins five (5) year limited engine warranty shall be provided. A copy of the warranty certificate shall be submitted with the bid package.</p>		

	Bidder Complies	
	Yes	No
<p><u>STEERING GEAR WARRANTY</u></p> <p>A Sheppard three (3) year limited steering gear warranty shall be provided. A copy of the warranty certificate shall be submitted with the bid package.</p> <p><u>FIFTY (50) YEAR STRUCTURAL INTEGRITY</u></p> <p>The chassis frame and crossmembers shall be provided with a fifty (50) year material and workmanship limited warranty. The warranty shall cover the chassis frame and crossmembers as being free from defects in material and workmanship that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>FRONT AXLE THREE (3) YEAR MATERIAL AND WORKMANSHIP WARRANTY</u></p> <p>Independent front suspension shall be provided with a three (3) year material and workmanship limited warranty. The manufacturer's warranty shall provide that the independent front suspension and steering gears be free from any defect related to material and workmanship on the portion of the apparatus built by the manufacturer that would arise under normal use and service. A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>REAR AXLE TWO (2) YEAR MATERIAL AND WORKMANSHIP WARRANTY</u></p> <p>A Meritor™ Axle two (2) year limited warranty shall be provided.</p> <p><u>ABS BRAKE SYSTEM THREE (3) YEAR MATERIAL AND WORKMANSHIP WARRANTY</u></p> <p>A Meritor Wabco™ ABS brake system three (3) year limited warranty shall be provided.</p> <p><u>TEN (10) YEAR STRUCTURAL INTEGRITY</u></p> <p>The new cab shall be provided with a ten (10) year material and workmanship limited warranty. The warranty shall cover such portions of the cab built by the manufacturer as being free from structural failures caused by defects in material and workmanship that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>TEN (10) YEAR PRO-RATED PAINT AND CORROSION</u></p> <p>Each new piece of apparatus shall be provided with a ten (10) year pro-rated paint and corrosion limited warranty on the apparatus cab. The warranty shall cover painted exterior surfaces of the body to be free from blistering, peeling, corrosion, or any other adhesion defect caused by defective manufacturing methods or paint material selection that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p>		

	Bidder Complies	
	Yes	No
<p><u>FIVE (5) YEAR MATERIAL AND WORKMANSHIP</u></p> <p>The electronic modules and display(s) shall be provided with a five (5) year material and workmanship limited warranty. The warranty shall cover electronic modules to be free from failures caused by defects in material and workmanship.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>CAMERA SYSTEM WARRANTY</u></p> <p>A fifty-four (54) month warranty shall be provided for the camera system.</p> <p><u>COMPARTMENT LIGHT WARRANTY</u></p> <p>A ten (10) year material and workmanship limited warranty shall be provided for the manufacturer's 12-volt DC LED strip lights. The warranty shall cover the LED strip lights to be free from defects in material and workmanship that would arise under normal use.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>TRANSMISSION WARRANTY</u></p> <p>The transmission shall have a five (5) year/unlimited mileage warranty covering 100 percent parts and labor. The warranty is to be provided by Allison Transmission and not the apparatus builder.</p> <p><u>TRANSMISSION COOLER WARRANTY</u></p> <p>The transmission cooler shall carry a five (5) year parts and labor warranty (exclusive to the transmission cooler). In addition, a collateral damage warranty shall also be in effect for the first three (3) years of the warranty coverage and shall not exceed \$10,000 per occurrence. A copy of the warranty certificate shall be submitted with the bid package.</p> <p><u>WATER TANK WARRANTY</u></p> <p>The UPF poly water tank shall be provided with a lifetime material and workmanship limited warranty.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>TEN (10) YEAR STRUCTURAL INTEGRITY</u></p> <p>Each new piece of apparatus shall be provided with a ten (10) year material and workmanship limited warranty on the apparatus body. The warranty shall cover such portions of the apparatus built by the manufacturer as being free from defects in material and workmanship that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>ROLL UP DOOR MATERIAL AND WORKMANSHIP WARRANTY</u></p> <p>A Gortite roll-up door limited warranty shall be provided. The mechanical components of the roll-up door shall be warranted against defects in material and workmanship for the lifetime of the vehicle. A six (6) year limited warranty shall be provided on painted and satin roll up doors.</p>		

	Bidder Complies	
	Yes	No
<p>A copy of the warranty certificate shall be submitted with the bid package.</p> <p><u>PUMP WARRANTY</u></p> <p>The Waterous pump shall be provided with a Seven (7) year material and workmanship limited warranty.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>TEN (10) YEAR PUMP PLUMBING WARRANTY</u></p> <p>The stainless-steel plumbing components and ancillary brass fittings used in the construction of the water/foam plumbing system shall be warranted for a period of ten (10) years or 100,000 miles. This covers structural failures caused by defective design or workmanship, or perforation caused by corrosion, provided the apparatus is used in a normal and reasonable manner. This warranty is extended only to the original purchaser for a period of ten years from the date of delivery.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>TWENTY (20) YEAR AERIAL DEVICE STRUCTURAL INTEGRITY WARRANTY</u></p> <p>The aerial device shall be provided with a twenty (20) year material and workmanship limited warranty. The warranty shall cover such portions of the apparatus built by the manufacturer as being free from defects in material and workmanship that would arise under normal use and service. This warranty shall be limited to the torque box, turntable, aerial sections, and other structural components.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>AERIAL SWIVEL WARRANTY</u></p> <p>An Amity five (5) year limited swivel warranty shall be provided. A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>HYDRAULIC SYSTEM COMPONENTS WARRANTY</u></p> <p>Aerial hydraulic system components shall be provided with a five (5) year material and workmanship limited warranty.</p> <p><u>HYDRAULIC SEAL WARRANTY</u></p> <p>Aerial hydraulic seals shall be provided with a three (3) year material and workmanship limited warranty.</p> <p>A copy of the warranty certificates shall be submitted with the bid package (no exception).</p> <p><u>AERIAL WATERWAY WARRANTY</u></p> <p>An Amity ten (10) year limited waterway warranty shall be provided. A copy of the warranty certificate shall be submitted with the bid package (no exception).</p>		

	Bidder Complies	
	Yes	No
<p><u>FOUR (4) YEAR PRO-RATED PAINT AND CORROSION</u></p> <p>The aerial device shall be provided with a four (4) year pro-rated paint and corrosion limited warranty. The warranty shall cover exterior painted surfaces of the aerial device to be free from blistering, peeling, corrosion, or any other adhesion defect caused by defective manufacturing methods or paint material selection that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>FIVE (5) YEAR MATERIAL AND WORKMANSHIP</u></p> <p>The electronic modules and display(s) shall be provided with a five (5) year material and workmanship limited warranty. The warranty shall cover electronic modules to be free from failures caused by defects in material and workmanship.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>TEN (10) YEAR PRO-RATED PAINT AND CORROSION</u></p> <p>Each new piece of apparatus shall be provided with a ten (10) year pro-rated paint and corrosion limited warranty on the apparatus body. The warranty shall cover painted exterior surfaces of the body to be free from blistering, peeling, corrosion, or any other adhesion defect caused by defective manufacturing methods or paint material selection that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>THREE (3) YEAR MATERIAL AND WORKMANSHIP</u></p> <p>The gold leaf lamination shall be provided with a three (3) year material and workmanship limited warranty. The warranty shall cover the gold leaf lamination as being free from defects in material and workmanship that would arise under normal use and service.</p> <p>A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>TWO (2) YEAR EXTENDED</u></p> <p>Each new piece of apparatus shall be provided with a two (2) year basic apparatus material and workmanship limited warranty on the chassis. The manufacturer's warranty shall provide for repairs to correct any defect related to material and workmanship on the portion of the apparatus built by the manufacturer that would arise under normal use and service. A copy of the warranty certificate shall be submitted with the bid package (no exception).</p> <p><u>TWO (2) YEAR EXTENDED</u></p> <p>Each new piece of apparatus shall be provided with a two (2) year basic apparatus material and workmanship limited warranty on the aerial body and device. The manufacturer's warranty shall provide for repairs to correct any defect related to material and workmanship on the portion of the apparatus built by the manufacturer that would arise under normal use and service. A copy of the warranty certificate shall be submitted with the bid package (no exception).</p>		

	Bidder Complies	
	Yes	No
<p><u>VEHICLE STABILITY CERTIFICATION</u></p> <p>The fire apparatus manufacturer shall provide a certification stating the apparatus complies with NFPA 1901, current edition, section 4.13, Vehicle Stability. The certification shall be provided at the time of bid.</p> <p><u>ENGINE INSTALLATION CERTIFICATION</u></p> <p>The fire apparatus manufacturer shall provide a certification, along with a letter from the engine manufacturer stating they approve of the engine installation in the bidder's chassis. The certification shall be provided at the time of bid.</p> <p><u>POWER STEERING CERTIFICATION</u></p> <p>The fire apparatus manufacturer shall provide a certification stating the power steering system as installed meets the requirements of the component supplier. The certification shall be provided at the time of bid.</p> <p><u>CAB INTEGRITY CERTIFICATION</u></p> <p>The fire apparatus manufacturer shall provide a cab integrity certification with this proposal. The certification shall state that the cab has been tested and certified by an independent third-party test facility. Testing events shall be documented with photographs, real-time and high-speed video, vehicle accelerometers, cart accelerometers, and a laser speed trap. The fire apparatus manufacturer shall provide a state-licensed professional engineer to witness and certify all testing events. Testing shall meet or exceed the requirements below:</p> <ul style="list-style-type: none"> • European Occupant Protection Standard ECE Regulation No.29. • SAE J2422 Cab Roof Strength Evaluation - Quasi-Static Loading Heavy Trucks. • SAE J2420 COE Frontal Strength Evaluation - Dynamic Loading Heavy Trucks. <p><u>Roof Crush</u></p> <p>The cab shall be subjected to a roof crush force of 22,050 lb. This value meets the ECE 29 criteria and is equivalent to the front axle rating up to a maximum of 10 metric tons.</p> <p><u>Additional Roof Crush</u></p> <p>The same cab shall be subjected to a roof crush force of 100,000 lbs. This value exceeds the ECE 29 criteria by nearly 4.5 times.</p> <p><u>Side Impact</u></p> <p>The same cab shall be subjected to dynamic preload where a 13,275 lb moving barrier slams into the side of the cab at 5.5 mph at a force of 13,000 ft-lbs. This test is part of the SAE J2422 test procedure and more closely represents the forces a cab shall see in a rollover incident.</p> <p><u>Frontal Impact</u></p> <p>The same cab shall withstand a frontal impact of 32,600 ft-lbs of force using a moving barrier in accordance with SAE J2420.</p>		

	Bidder Complies	
	Yes	No
<p><u>Additional Frontal Impact</u></p> <p>The same cab shall withstand a frontal impact of 65,200 ft-lbs of force using a moving barrier, (twice the force required by SAE J2420).</p> <p>The same cab shall withstand all tests without any measurable intrusion into the survival space of the occupant area.</p> <p>There shall be no exception to any portion of the cab integrity certification. Nonconformance shall lead to immediate rejection of bid.</p> <p><u>CAB DOOR DURABILITY CERTIFICATION</u></p> <p>Robust cab doors help protect occupants. Cab doors shall survive a 200,000-cycle door slam test where the slamming force exceeds 20 G's of deceleration. The bidder shall certify that the sample doors like those provided on the apparatus have been tested and have met these criteria without structural damage, latch malfunction, or significant component wear.</p> <p><u>WINDSHIELD WIPER DURABILITY CERTIFICATION</u></p> <p>Visibility during inclement weather is essential to safe apparatus performance. Windshield wipers shall survive a 3 million cycle durability test in accordance with section 6.2 of SAE J198 <i>Windshield Wiper Systems - Trucks, Buses and Multipurpose Vehicles</i>. The bidder shall certify that the wiper system design has been tested and that the wiper system has met these criteria.</p> <p><u>ELECTRIC WINDOW DURABILITY CERTIFICATION</u></p> <p>Cab window roll-up systems can cause maintenance problems if not designed for long service life. The window regulator design shall complete 30,000 complete up-down cycles and still function normally when finished. The bidder shall certify that sample doors and windows similar to those provided on the apparatus have been tested and have met these criteria without malfunction or significant component wear.</p> <p><u>SEAT BELT ANCHOR STRENGTH</u></p> <p>Seat belt attachment strength is regulated by Federal Motor Vehicle Safety Standards and should be validated through testing. Each seat belt anchor design shall withstand 3000 lb of pull on both the lap and shoulder belt in accordance with FMVSS 571.210 Seat Belt Assembly Anchorages. The bidder shall certify that each anchor design was pull tested to the required force and met the appropriate criteria.</p> <p><u>SEAT MOUNTING STRENGTH</u></p> <p>Seat attachment strength is regulated by Federal Motor Vehicle Safety Standards and should be validated through testing. Each seat mounting design shall be tested to withstand 20 G's of force in accordance with FMVSS 571.207 Seating Systems. The bidder shall certify that each seat mount and cab structure design was pull tested to the required force and met the appropriate criteria.</p>		

	Bidder Complies	
	Yes	No
<p><u>PERFORMANCE CERTIFICATIONS</u></p> <p><u>Cab Air Conditioning</u> Air conditioning certification unavailable.</p> <p><u>Cab Defroster</u> Visibility during inclement weather is essential to safe apparatus performance. The defroster system shall clear the required windshield zones in accordance with SAE J381 Windshield Defrosting Systems Test Procedure and Performance Requirements - Trucks, Buses, And Multipurpose Vehicles. The bidder shall certify that the defrost system design has been tested in a cold chamber and passes the SAE J381 criteria.</p> <p><u>Cab Auxiliary Heater</u> Good cab heat performance and regulation provides a more effective working environment for personnel, whether in-transit, or at a scene. An auxiliary cab heater shall warm the cab 77 degrees Fahrenheit from a cold soak, within 30 minutes when tested using the coolant supply methods found in SAE J381. The bidder shall certify, at time of delivery, that a substantially similar cab has been tested and has met these criteria.</p> <p><u>ELECTRICAL WIRING DIAGRAMS</u> Two (2) electrical wiring diagrams, prepared for the model of chassis and body, shall be provided.</p> <p><u>AMP DRAW REPORT</u> The bidder shall provide, at the time of bid and delivery, an itemized print out of the expected amp draw of the entire vehicle's electrical system.</p> <p>The manufacturer of the apparatus shall provide the following:</p> <ul style="list-style-type: none"> • Documentation of the electrical system performance tests. • A written load analysis, which shall include the following: <ul style="list-style-type: none"> ○ The nameplate rating of the alternator. ○ The alternator rating under the conditions specified per: <ul style="list-style-type: none"> ▪ Applicable NFPA 1901 or 1906 (Current Edition). ○ The minimum continuous load of each component that is specified per: <ul style="list-style-type: none"> ▪ Applicable NFPA 1901 or 1906 (Current Edition). ○ Additional loads that, when added to the minimum continuous load, determine the total connected load. ○ Each individual intermittent load. <p>All the above listed items shall be provided by the bidder per the applicable NFPA 1901 or 1906 (Current Edition).</p>		